



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>G11B 20/00, 7/007, 23/28, G06F 1/00</b></p>	<b>A2</b>	<p>(11) International Publication Number: <b>WO 00/67257</b></p> <p>(43) International Publication Date: 9 November 2000 (09.11.00)</p>											
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(21) International Application Number: PCT/JP00/02750</p> <p>(22) International Filing Date: 27 April 2000 (27.04.00)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">11/122104</td> <td style="width: 40%;">28 April 1999 (28.04.99)</td> <td style="width: 30%;">JP</td> </tr> <tr> <td>11/128197</td> <td>10 May 1999 (10.05.99)</td> <td>JP</td> </tr> <tr> <td>11/299635</td> <td>21 October 1999 (21.10.99)</td> <td>JP</td> </tr> </table> <p>(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).</p> </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(72) Inventors: NAGAI, Takahiro; 301, Mezon Higashinoda-cho 4-23, Higashinoda-cho 4-chome, Miyakojima-ku, Osaka-shi, Osaka 534-0024 (JP). ISHIHARA, Hideshi; 10-120, Ikuno 1-chome, Katano-shi, Osaka 576-0054 (JP). TAKAGI, Yuji; 2-29-1-309, Deguchi, Hirakata-shi, Osaka 573-0065 (JP). YUMIBA, Takashi; 606, Bervi Nishiura, 58, Kowata-nishiura, Uji-shi, Kyoto 611-0002 (JP). SHOJI, Mamoru; 3-13-4-805, Mozu-umemachi, Sakai-shi, Osaka 591-8032 (JP). OSHIMA, Mitsuki; 115-3, Katsura-minamitatsumi-cho, Nishikyo-ku, Kyoto-shi, Kyoto 615-8074 (JP). OHARA, Shunji; 221-5, Shinjo, Higashiosaka-shi, Osaka 578-0963 (JP). ITO, Motoshi; 17-25-302, Furuichi 3-chome, Joto-ku, Osaka-shi, Osaka 536-0001 (JP). ISHIDA, Takashi; 13-14, Hashimoto-isoku, Yawata-shi, Kyoto 614-8331 (JP). NAKAMURA, Atsushi; Syoukouryo, 25-3, Mido-cho, Kadoma-shi, Osaka 571-0064 (JP). JAHANA, Tadashi; 202, Dai-5 Mine Haitsu, 836-6, Kamoi, Midori-ku, Yokohama-shi, Kanagawa 226-0003 (JP). NAKATA, Kouhei; B305, Eminensu Marunouchi, 13-15, Marunouchi-cho, Kawanishi-shi, Hyogo 666-0003 (JP).</p> <p>(74) Agents: AOYAMA, Tamotsu et al.; Aoyama &amp; Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).</p> <p>(81) Designated States: CN, KR.</p> <p><b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i></p> </td> </tr> </table>			<p>(21) International Application Number: PCT/JP00/02750</p> <p>(22) International Filing Date: 27 April 2000 (27.04.00)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">11/122104</td> <td style="width: 40%;">28 April 1999 (28.04.99)</td> <td style="width: 30%;">JP</td> </tr> <tr> <td>11/128197</td> <td>10 May 1999 (10.05.99)</td> <td>JP</td> </tr> <tr> <td>11/299635</td> <td>21 October 1999 (21.10.99)</td> <td>JP</td> </tr> </table> <p>(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).</p>	11/122104	28 April 1999 (28.04.99)	JP	11/128197	10 May 1999 (10.05.99)	JP	11/299635	21 October 1999 (21.10.99)	JP	<p>(72) Inventors: NAGAI, Takahiro; 301, Mezon Higashinoda-cho 4-23, Higashinoda-cho 4-chome, Miyakojima-ku, Osaka-shi, Osaka 534-0024 (JP). ISHIHARA, Hideshi; 10-120, Ikuno 1-chome, Katano-shi, Osaka 576-0054 (JP). TAKAGI, Yuji; 2-29-1-309, Deguchi, Hirakata-shi, Osaka 573-0065 (JP). YUMIBA, Takashi; 606, Bervi Nishiura, 58, Kowata-nishiura, Uji-shi, Kyoto 611-0002 (JP). SHOJI, Mamoru; 3-13-4-805, Mozu-umemachi, Sakai-shi, Osaka 591-8032 (JP). OSHIMA, Mitsuki; 115-3, Katsura-minamitatsumi-cho, Nishikyo-ku, Kyoto-shi, Kyoto 615-8074 (JP). OHARA, Shunji; 221-5, Shinjo, Higashiosaka-shi, Osaka 578-0963 (JP). ITO, Motoshi; 17-25-302, Furuichi 3-chome, Joto-ku, Osaka-shi, Osaka 536-0001 (JP). ISHIDA, Takashi; 13-14, Hashimoto-isoku, Yawata-shi, Kyoto 614-8331 (JP). NAKAMURA, Atsushi; Syoukouryo, 25-3, Mido-cho, Kadoma-shi, Osaka 571-0064 (JP). JAHANA, Tadashi; 202, Dai-5 Mine Haitsu, 836-6, Kamoi, Midori-ku, Yokohama-shi, Kanagawa 226-0003 (JP). NAKATA, Kouhei; B305, Eminensu Marunouchi, 13-15, Marunouchi-cho, Kawanishi-shi, Hyogo 666-0003 (JP).</p> <p>(74) Agents: AOYAMA, Tamotsu et al.; Aoyama &amp; Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).</p> <p>(81) Designated States: CN, KR.</p> <p><b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(21) International Application Number: PCT/JP00/02750</p> <p>(22) International Filing Date: 27 April 2000 (27.04.00)</p> <p>(30) Priority Data:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">11/122104</td> <td style="width: 40%;">28 April 1999 (28.04.99)</td> <td style="width: 30%;">JP</td> </tr> <tr> <td>11/128197</td> <td>10 May 1999 (10.05.99)</td> <td>JP</td> </tr> <tr> <td>11/299635</td> <td>21 October 1999 (21.10.99)</td> <td>JP</td> </tr> </table> <p>(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).</p>	11/122104	28 April 1999 (28.04.99)	JP	11/128197	10 May 1999 (10.05.99)	JP	11/299635	21 October 1999 (21.10.99)	JP	<p>(72) Inventors: NAGAI, Takahiro; 301, Mezon Higashinoda-cho 4-23, Higashinoda-cho 4-chome, Miyakojima-ku, Osaka-shi, Osaka 534-0024 (JP). ISHIHARA, Hideshi; 10-120, Ikuno 1-chome, Katano-shi, Osaka 576-0054 (JP). TAKAGI, Yuji; 2-29-1-309, Deguchi, Hirakata-shi, Osaka 573-0065 (JP). YUMIBA, Takashi; 606, Bervi Nishiura, 58, Kowata-nishiura, Uji-shi, Kyoto 611-0002 (JP). SHOJI, Mamoru; 3-13-4-805, Mozu-umemachi, Sakai-shi, Osaka 591-8032 (JP). OSHIMA, Mitsuki; 115-3, Katsura-minamitatsumi-cho, Nishikyo-ku, Kyoto-shi, Kyoto 615-8074 (JP). OHARA, Shunji; 221-5, Shinjo, Higashiosaka-shi, Osaka 578-0963 (JP). ITO, Motoshi; 17-25-302, Furuichi 3-chome, Joto-ku, Osaka-shi, Osaka 536-0001 (JP). ISHIDA, Takashi; 13-14, Hashimoto-isoku, Yawata-shi, Kyoto 614-8331 (JP). NAKAMURA, Atsushi; Syoukouryo, 25-3, Mido-cho, Kadoma-shi, Osaka 571-0064 (JP). JAHANA, Tadashi; 202, Dai-5 Mine Haitsu, 836-6, Kamoi, Midori-ku, Yokohama-shi, Kanagawa 226-0003 (JP). NAKATA, Kouhei; B305, Eminensu Marunouchi, 13-15, Marunouchi-cho, Kawanishi-shi, Hyogo 666-0003 (JP).</p> <p>(74) Agents: AOYAMA, Tamotsu et al.; Aoyama &amp; Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).</p> <p>(81) Designated States: CN, KR.</p> <p><b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i></p>			
11/122104	28 April 1999 (28.04.99)	JP											
11/128197	10 May 1999 (10.05.99)	JP											
11/299635	21 October 1999 (21.10.99)	JP											
<p>(54) Title: OPTICAL DISK, OPTICAL DISK RECORDING AND REPRODUCING APPARATUS, METHOD FOR RECORDING, REPRODUCING AND DELETING DATA ON OPTICAL DISK, AND INFORMATION PROCESSING SYSTEM</p>													
<p>(57) Abstract</p> <p>An optical disk of recording type on which data is recordable is provided which includes a data recording and reproducing area for recording data therein and reproducing data therefrom, and a read-only disk identification information area for recording disk identification information for identifying the optical disk therein. In the optical disk, the disk identification information is formed by removing a reflection film formed on the optical disk in a strip shape. The disk identification information includes an inherent disk identifier for each optical disk, and the data recording and reproducing area includes an area for recording therein encrypted data, which is encrypted using information including the disk identification information for identifying the optical disk as a key.</p>													
<div style="text-align: center;">FIRST PREFERRED EMBODIMENT</div>													

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DESCRIPTION

OPTICAL DISK, OPTICAL DISK RECORDING AND REPRODUCING APPARATUS, METHOD FOR RECORDING, REPRODUCING AND DELETING DATA ON OPTICAL DISK, AND INFORMATION PROCESSING SYSTEM

## 5 TECHNICAL FIELD

The present invention relates to an optical disk, an optical disk recording and reproducing apparatus, a method for recording, reproducing and deleting data on an optical disk, and an information processing system. In particular, the  
10 present invention relates to an optical disk, an optical disk recording and reproducing apparatus, a method for recording, reproducing and deleting data on an optical disk, and an information processing system, which can prevent unjust digital copying from being performed from an optical disk, on which data  
15 such as AV data (Audio and Visual Data) including image data of movies and audio data of music protected with copyright is recorded, to the other recording media such as an optical disk of another recording type or the like.

## BACKGROUND ART

20 An optical disk is superior in random accessibility to conventional tape media, and has such an advantage that deterioration due to repetitive use is reduced because of being capable of non-contacting recording and reproducing using laser light. Further, the optical disk has such an advantage that  
25 mass reproduction can be made at low cost by mastering performed

by disk manufacturers, and a CD (Compact Disk) becomes generalized as a high quality digital audio instead of a conventional phonograph record for analog recording. Furthermore, recently, a DVD where high quality image data has been digitally recorded (Digital Video Disk or Digital Versatile Disk) is commercialized, and the optical disk will be expected to be further developed as a digital recording medium for AV data in the near future.

On the other hand, in addition to a read-only optical disk on which data has been previously recorded in a pre-pit form by a disk manufacturer, such as a music CD, CD-ROM, DVD-ROM or the like, an optical disk of recording type on which user can record AV data at home, such as CD-R, CD-RW, MO, MD, DVD-RAM or the like has been recently developed and widely spread.

Also, in television broadcasts, digital systems for allowing multi-channeling or various services have been introduced instead of conventional analog systems, and such a trend will be widely spread in the near future. In particular, the optical disk of recording type is expected to be utilized, as recording media of content delivered through digitized broadcasting or communication, for recording AV data mainly for the purpose of time shift utilization where, after contents are accumulated upon being delivered, program selection is performed and the selected content is listened or watched.

Conventionally, an optical disk of recording type



which has been utilized mainly for computers is utilized for storing data which has been created by a user himself, and the optical disk of recording type does not have any means for preventing copying from being performed between optical disk of recording types. When the optical disk of recording type is widely utilized, an ordinary user copies recorded data of an optical disk to another optical disk of recording type irregularly as it is so that it becomes possible to obtain unjust reproduction without paying copyright royalty to be paid to an author or writer of this AV data and without deterioration in sound quality and image quality owing to that the optical disk of recording type is digitally recordable, which becomes a factor of preventing spread of excellent content. Regarding an MD on which music or the like is digitally recorded, means for performing generation management for limiting the number of recordings has been introduced, where data together with generation management data is recorded on an optical disk and the number of copyings is limited by the generation management data.

Also, in order to prevent unjust copying of a CD-ROM or a DVD-ROM, for example, a method for forming a Burst Cutting Area (referred to as a BCA hereinafter) which is a write once area for overwriting barcode on a pit section of an optical disk, and for recording IDs on the BCA which are different from each other for each optical disk upon manufacturing optical disks,

has been proposed in an international application of International Publication No. WO 97/14144. According to this method, since a password is different for each disk ID, one password can decrypt only a cipher of one disk, so that, even  
5 when content is copied unjustly, the content can not be decrypted due to lack of information of a disk ID.

Fig. 39 is a block diagram showing a configuration of a user data area of a conventional DVD-ROM, and a configuration of an optical disk reproducing apparatus for  
10 decrypting an encrypted content from data in the user data area. In the DVD-ROM, as shown in Fig. 39, encryption is performed on content data recorded on a disk.

Referring to Fig. 39, the user data area of the DVD-ROM is constituted by a sector header area 3201, a main data  
15 area 3202, and an error detection code 3203. In this case, a sector address 3204 indicating a position of a sector, copyright control information 3205 on which the copyright control information regarding data recorded on the main data area 3202 (for example, a scramble flag, copy control information and the  
20 like) is recorded, and a decipher key 3206 for decrypting a cipher when the cipher is performed on data recorded on the main data area 3202 are recorded on the sector header area 3201. Also, mainly AV data required for copyright protection and the like are encrypted and recorded on the main data area 3202.

25 At the time of reproducing such a user data area,

a decipher key 3206 required for reproducing encrypted content from the sector header area 3201 is first acquired. The acquired decipher key 3206 is inputted to a key decrypting device 3207, which decrypts the input decipher key 3206 to a content  
5 decipher key by using a predetermined disk key, and outputs the content decipher key to a decrypting device 3208. Next, the decrypting device 3208 decrypts the encrypted content of the main data area 3202 using the decrypted content decipher key, according to the copyright control information 3205 which has  
10 been stored on the sector header area 3201 corresponding to the main data area 3202, and then, the decrypted content which is reproducible data can be obtained.

In the optical disk according to the configuration shown in Fig. 39, it is possible to perform reading-out from  
15 the main data area 3202 through a driving apparatus of a personal computer or the like. However, unjust reproduction or production of pirated version can be prevented by constituting the optical disk so that an area where the decipher key 3206 is recorded can be read out only by an optical disk reproducing  
20 apparatus with a regular authentication function.

However, for the unjust copying preventing method using the generation management data, it is inevitable to change the generation management data upon copying (change from "once copying possible" to "copying impossible"). On the other hand,  
25 there is such a problem that unjust copying can not be prevented

sufficiently by copying data on the optical disk together with the generation management data without changing the generation management data or by altering the generation management data by a computer or the like and recording them on the optical disk.

5 Furthermore, since the number of copyings is limited based on the generation management data which has been previously recorded together with the content, there is such a problem that, even when a regular copyright royalty is paid, data which has been made "copying impossible" is not allowed to be copied to  
10 another optical disk at all, and a user must wait for providing content data from a content provider. Both the problems are caused due to that the content provider can not manage content copying onto an optical disk of recording type performed by a user sufficiently.

15 Recently, personal computers are further improved in performance and further they are connected to networks, so that cipher decryption can be performed at high speed by a plurality of personal computers. In order to further increase robustness of the cipher against such a decryption, it becomes  
20 necessary to extend a key length of a key used for the cipher. However, in a key management method for recording a decipher key in a sector header as proposed conventionally, there is such an problem that only a decipher key with a size of a predetermined length (a size of decipher key area) or less is recorded, and  
25 a key length can not be elongated for the purpose of improving

robustness of a cipher in the future.

The first object of the present invention is to provide an optical disk, an optical disk recording apparatus, an optical disk reproducing apparatus, an optical disk  
5 recording and reproducing apparatus, a method for recording and reproducing data on an optical disk, a method for recording data on an optical disk, a method for reproducing data on an optical disk, a method for deleting data on an optical disk, and an information processing system, which can prevent unjust digital  
10 copying which a content provider can not manage.

Also, the second object of the present invention is to provide an optical disk, an optical disk recording apparatus, an optical disk reproducing apparatus, an optical disk  
recording and reproducing apparatus, a method for recording and  
15 reproducing on an optical disk, a method for recording on an optical disk, a method for reproducing on an optical disk, a method for deleting data on an optical disk, and an information processing system, which can enhance reliability of a decipher key required to decrypt data required for copyright protection.

20 Furthermore, the third object of the present invention is to provide an optical disk, an optical disk recording apparatus, an optical disk reproducing apparatus, an optical disk recording and reproducing apparatus, a method for recording and reproducing data on an optical disk, a method for  
25 recording data on an optical disk, a method for reproducing data

on an optical disk, a method for deleting data on an optical disk, and an information processing system, which can set robustness level of cipher according to a level of copyright protection of content to be recorded.

5 DISCLOSURE OF THE INVENTION

In order to achieve the aforementioned objective, according to one aspect of the present invention, an optical disk of recording type on which data is recordable, including:

a data recording and reproducing area for recording  
10 data therein and reproducing data therefrom; and

a read-only disk identification information area for recording disk identification information for identifying the optical disk therein.

In the above-mentioned optical disk, the disk  
15 identification information is preferably formed by removing a reflection film formed on the optical disk in a strip shape.

In the above-mentioned optical disk, the disk identification information preferably includes an inherent disk identifier for each optical disk.

20 In the above-mentioned optical disk, the data recording and reproducing area preferably includes an area for recording therein encrypted data, which is encrypted using information including the disk identification information for identifying the optical disk as a key.

25 In the above-mentioned optical disk, the encrypted

data preferably includes content data which is at least one of image data and music data.

In the above-mentioned optical disk, the encrypted data preferably includes a descramble key for decrypting a  
5 cipher which has been performed on content data.

In the above-mentioned optical disk, the encrypted data preferably includes:

- (a) a descramble key for decrypting a cipher which has been performed on content data, and
- 10 (b) an error detection code for detecting an error in the descramble key.

According to another aspect of the present invention, there is provided an optical disk of recording type on which data is recordable,

15 wherein the optical disk includes a data recording and reproducing area for recording data therein and reproducing data therefrom, and

wherein the data recording and reproducing area includes an area for recording therein, content data which is  
20 at least one of encrypted image data and encrypted music data, and a descramble key for decrypting a cipher which has been performed on the content data.

According to a further aspect of the present invention, there is provided an optical disk of recording type  
25 on which data is recordable, including:

a read-only disk identification information area for recording therein disk identification information for identifying the optical disk;

a data recording and reproducing area for recording  
5 therein and reproducing therefrom, content data including at least one of encrypted image data and encrypted music data; and

a key management information area for recording therein, key information used when reproducing the content data, and a descramble key which is encrypted using the disk  
10 identification information as a key.

According to another aspect of the present invention, there is provided an optical disk recording and reproducing apparatus for controlling at least one of:

(a) a recording operation for recording data in a  
15 data recording and reproducing area of an optical disk of recording type on which data is recordable, and

(b) a reproducing operation for reproducing data from the data recording and reproducing area,

wherein the optical disk includes a disk  
20 identification information area for recording therein disk identification information for identifying the optical disk, and

wherein the optical disk recording and reproducing apparatus comprises;

25 reproducing means for reproducing the disk



identification information from the disk identification  
information area; and

control means for judging whether or not at least  
one of the recording operation and the reproducing operation  
5 is performed based on the reproduced disk identification  
information, and for controlling the optical disk recording and  
reproducing apparatus to perform at least one of the recording  
operation and the reproducing operation in response to a  
judgment result.

10 According to a further aspect of the present  
invention, there is provided an optical disk recording  
apparatus for recording content data on an optical disk of  
recording type on which data is recordable,

wherein the optical disk includes an area for  
15 recording a disk identification information area for  
identifying the optical disk, and

wherein the optical disk recording apparatus  
comprises:

reproducing means for reproducing the disk  
20 identification information from the disk identification  
information area, and

recording means for recording at least partially  
encrypted data on the optical disk, using the reproduced disk  
identification information as a key.

25 According to a still further aspect of the present

invention, there is provided an optical disk reproducing apparatus for reproducing content data from an optical disk of recording type on which data is recordable,

wherein the optical disk includes a disk  
5 identification information area for recording therein disk identification information for identifying the optical disk, and

wherein the optical disk reproducing apparatus comprises:

10 reproducing means for reproducing the disk identification information from the disk identification information area, and

decrypting means for decrypting at least partially encrypted data using the reproduced disk identification  
15 information as a key after reproducing the at least partially encrypted data from the optical disk.

According to another aspect of the present invention, there is provided an optical disk recording and reproducing method for controlling at least one of:

20 (a) a recording operation for recording data into a data recording and reproducing area of an optical disk of recording type on which data is recordable, and

(b) a reproducing operation for reproducing the data from the data recording and reproducing area,

25 wherein the optical disk includes a disk

identification information area for recording therein disk  
identification information for identifying the optical disk,  
and

wherein the method includes the steps of:

5 reproducing the disk identification information  
from the disk identification information area; and

judging whether or not at least one of the recording  
operation and the reproducing operation is performed based on  
the reproduced disk identification information, and

10 controlling the recording operation and the reproducing  
operation to perform at least one of the recording operation  
and the reproducing operation based on a judgement result.

According to a further aspect of the present  
invention, there is provided an optical disk recording method  
15 for recording content data on an optical disk of recording type  
on which data is recordable,

wherein the optical disk includes a disk  
identification information area for recording therein disk  
identification information for identifying the optical disk,  
20 and

wherein the method includes the steps of:

reproducing disk identification information from  
the disk identification information area; and

recording at least partially encrypted data on the  
25 optical disk, using the reproduced disk identification

information as a key.

According to a still further aspect of the present invention, there is provided an optical disk reproducing method for reproducing content data from an optical disk of recording  
5 type on which data is recordable,

wherein the optical disk includes a disk identification information area for recording therein disk identification information for identifying the optical disk, and

10 wherein the method includes of the steps of:  
reproducing the disk identification information from the disk identification information area; and  
decrypting at least partially encrypted data using the reproduced disk identification information as a key, after  
15 reproducing the at least partially encrypted data.

According to another aspect of the present invention, there is provided an optical disk of recording type on which data is recordable, including:

a first information area for recording first disk  
20 information therein;

a second information area for recording therein second disk information for identifying each optical disk; and

a user data area for recording information data by irradiating a light beam onto the user data area.

25 According to a further aspect of the present

invention, there is provided an optical disk of recording type on which data is recordable,

wherein the optical disk has a sector structure comprising a plurality of sectors,

5 wherein each of the sectors includes a sector header area and a main data area for recording encrypted data therein,

wherein the sector header area includes a decipher key information area for recording therein at least one decipher key required for decrypting the encrypted data, and

10 wherein a size of the decipher key information area is smaller than that of each decipher key.

According to a still further aspect of the present invention, there is provided an optical disk of recording type on which data is recordable,

15 wherein the optical disk includes a main data area for recording data therein,

wherein the main data area includes a non-encrypted area for recording data in a non-encrypted status, and an encrypted area for recording data in an encrypted status,

20 wherein the non-encrypted area includes decipher key conversion data used for conversion of a decipher key for decrypting data, and

wherein data in the encrypted area is encrypted using the decipher key which is converted using the decipher key conversion data.

25

According to another aspect of the present invention, there is provided an optical disk recording method for recording data on an optical disk of recording type on which data is recordable, including the steps of:

5               reading out a decipher key status which is recorded on the optical disk, and judging whether or not there is an empty area for a decipher key based on the read-out decipher key status;

              reserving a decipher key area and recording the  
10   decipher key in the decipher key area, when judging that there is the empty area for the decipher key;

              setting copyright control information and a decipher key index in at least one unit of a file unit and an extent unit;

              encrypting data using the decipher key, and recording  
15   the encrypted data on the optical disk in at least one unit of a file unit and an extent unit; and

              recording on the optical disk, optical disk file management information for managing data which is recorded on the optical disk.

20               According to a further aspect of the present invention, there is provided an optical disk reproducing method for reproducing data from an optical disk of recording type on which data is recordable, including the steps of:

              reproducing and acquiring a decipher key index from  
25   a data recording area in which data to be reproduced is recorded

in a file unit or an extent unit;

reproducing and acquiring a decipher key  
corresponding to the acquired decipher key index; and

reproducing data in the file unit or the extent unit  
5 which is encrypted using the decipher key.

According to a still further aspect of the present  
invention, there is provided an optical disk deleting method  
for deleting data from an optical disk of recording type on which  
data is recordable, comprising:

10 reproducing and acquiring a decipher key index from  
a recording area in which data to be deleted is recorded in a  
file unit or an extent unit;

updating a decipher key status, which corresponds  
to the acquired decipher key index and which indicates a recorded  
15 status of a decipher key, and releasing the decipher key; and

updating file management information for managing  
data which is recorded on the optical disk, by deleting a file  
entry corresponding to the data to be deleted from the file  
management information.

20 According to another aspect of the present invention,  
there is provided an information processing system comprising:

a data encrypting apparatus for encrypting data using  
a cipher key;

an optical disk recording and reproducing apparatus  
25 for recording a decipher key required for decrypting data on

an optical disk of recording type, and reproducing the recorded decipher key; and

a control apparatus connected to the optical disk recording and reproducing apparatus and the data encrypting apparatus,

wherein the optical disk recording and reproducing apparatus comprises:

first recording and reproducing means for recording a decipher key table on the optical disk, and reproducing the decipher key table from the optical disk;

encrypting and decrypting means for encrypting the decipher key, transmitting the encrypted decipher key, receiving the encrypted decipher key from the control apparatus, and decrypting the encrypted decipher key; and

second recording and reproducing means for recording a decipher key status table for indicating a recorded status of the decipher key on the optical disk, and reproducing the decipher key status table from the optical disk;

wherein the data encrypting apparatus comprises:

encrypting means for encrypting the decipher key, and transmitting the encrypting decipher key to the control apparatus; and

wherein the control apparatus comprises:

receiving means for receiving the encrypted decipher key from the encrypting means of the data encrypting apparatus;



and

allocating means for searching for an empty area for the decipher key based on the reproduced decipher key status table, allocating the received and encrypted decipher key into  
5 the searched empty area, and transmitting the allocated and encrypted decipher key to the optical disk recording and reproducing apparatus, and

wherein the encrypting and decrypting means of the optical disk recording and reproducing apparatus receives the  
10 allocated and encrypted decipher key from the allocating means of the control apparatus, and decrypts the received encrypted decipher key.

According to a further aspect of the present invention, there is provided an optical disk of read-only type  
15 for reproducing recorded data, including:

a data reproducing area for recording data therein;  
and

a read-only disk identification information area for recording therein disk identification information for  
20 identifying the optical disk,

wherein the data reproducing area includes an area in which data is recorded which is encrypted using information including the disk identification information for identifying the optical disk as a key.

25 BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings throughout which like  
5 parts are designated by like reference numerals, and in which:

Fig. 1 is a plan view illustrating a data recording area of the optical disk of recording type 100 of a first preferred embodiment according to the present invention;

Fig. 2A shows a block diagram and a cross section  
10 view illustrating an apparatus configuration for forming the BCA 106 of the optical disk 100 shown in Fig. 1;

Fig. 2B shows a cross section view of the optical disk 100 after formation of the BCA 106 of the optical disk 100 shown in Fig. 1 and a graph showing a strength of a reflected  
15 light in the horizontal direction;

Fig. 3 is a diagram showing a recording format of the BCA 106 shown in Fig. 1;

Fig. 4 shows a view for illustrating a sector structure of sector data 401 within a user data area 102 shown  
20 in Fig. 1;

Fig. 5 shows a view illustrating a configuration of a key management information area 107 shown in Fig. 1;

Fig. 6A is a block diagram showing a recording method for recording a descramble key and AV data in the sector data  
25 401 shown in Fig. 1 according to a modified preferred embodiment

of the first preferred embodiment;

Fig. 6B is a block diagram showing a recording method for recording a key index to the descramble key and the AV data into the sector data 401 shown in Fig. 1, according to the first preferred embodiment;

Fig. 7 is a block diagram showing a configuration of an optical disk recording and reproducing apparatus of a second preferred embodiment according to the present invention;

Fig. 8 is a flowchart showing a recording process of AV data carried out by a control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7;

Fig. 9 is a flowchart showing an allocating process of a key management information area carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7;

Fig. 10 is a flowchart showing a recording process of a descramble key carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7;

Fig. 11 is a flowchart showing a reproducing process of AV data carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7;

Fig. 12 is a flowchart showing an acquiring process of a descramble key carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig.

7;

Fig. 13 is a block diagram showing a method for determining whether or not a descramble key is regular based on an encrypted descramble key according to a modified preferred embodiment of the first preferred embodiment;

Fig. 14 is a view showing a configuration of the descramble area management table according to a modified preferred embodiment of the first preferred embodiment;

Fig. 15A is a diagram showing whether or not copying or reproducing of contents is possible within the same region or in different regions in the case that a region identifier is recorded when a content is recorded in the first preferred embodiment;

Fig. 15B is a diagram showing whether or not copying or reproducing of the content is possible in the same region or in different regions in the case that a region identifier is previously recorded when an optical disk is shipped in the first preferred embodiment;

Fig. 16 is a plan view showing a data recording area of an optical disk 1101 of a third preferred embodiment according to the present invention;

Fig. 17 is a waveform diagram showing signal waveforms of a reproduced signal 1201 and a reproduced binarized signal 1207 in a BCA reproducing circuit 1401 according to the third preferred embodiment;

Fig. 18 is a block diagram showing a configuration of the BCA reproducing circuit 1401 according to the third preferred embodiment;

Fig. 19 is a block diagram showing a configuration of an optical disk recording and reproducing system according to the third preferred embodiment;

Fig. 20 is a block diagram showing a configuration of an optical disk recording and reproducing system of the fourth preferred embodiment according to the present invention;

Fig. 21 is a plan view showing a data recording area of an optical disk 1601 of a fifth preferred embodiment according to the present invention;

Fig. 22 is a block diagram showing a configuration of an optical disk recording and reproducing system according to the fifth preferred embodiment;

Fig. 23 is a table showing a configuration of an ID adding table according to the fifth preferred embodiment;

Fig. 24 is a plan view showing a data recording area of an optical disk 1101a according to a modified preferred embodiment of the third preferred embodiment;

Fig. 25 is a plan view showing a data recording area of an optical disk 1601a according to a modified preferred embodiment of the fifth preferred embodiment;

Fig. 26 is a block diagram showing a configuration of a user data area on the optical disk, and a configuration

of an optical disk reproducing apparatus for decrypting an encrypted content from data in a user data area, according to a sixth preferred embodiment of the present invention;

Fig. 27 is a block diagram showing an arrangement  
5 of copyright control information and decipher key into a user data area, and an arrangement of an encrypted content into a main data area, in the optical disk according to the sixth preferred embodiment;

Fig. 28 is a block diagram showing an arrangement  
10 of the case where a unit for error correction is applied for a plurality of sectors in the optical disk according to the sixth preferred embodiment;

Fig. 29 is a block diagram showing a configuration  
of a lead-in area 2401 and a user data area 2402 within an optical  
15 disk of a seventh preferred embodiment according to the present invention, and a configuration of an optical disk reproducing apparatus for decrypting an encrypted content from data stored in the lead-in area 2401 and the user data area 2402;

Fig. 30A is a block diagram showing a data  
20 configuration in the case of indicating an unrecorded status by an initial value of a decipher key in the main data area of the lead-in area within the optical disk according to the seventh preferred embodiment;

Fig. 30B is a block diagram showing a data  
25 configuration in the case of indicating a recorded status by

a decipher key status table in the main data area of the lead-in area within the optical disk according to the seventh preferred embodiment;

Fig. 31 is a block diagram showing an arrangement  
5 of a decipher key in the optical disk according to the seventh preferred embodiment;

Fig. 32 is a block diagram showing a data  
configuration for managing data of an optical disk by a file  
management system of an eighth preferred embodiment according  
10 to the present invention;

Fig. 33 is a flowchart showing a recording process  
of content required for copyright protection, which is carried  
out by the file management system according to the eighth  
preferred embodiment;

15 Fig. 34 is a flowchart showing a reproducing process  
of content, which is carried out by the file management system  
according to the eighth preferred embodiment;

Fig. 35 is a flowchart showing a deleting process  
of content, which is carried out by the file management system  
20 according to the eighth preferred embodiment;

Fig. 36 is a block diagram showing a configuration  
of an optical disk system of a ninth preferred embodiment  
according to the present invention;

Fig. 37 is a block diagram showing a configuration  
25 of a user data area within an optical disk of a tenth preferred

embodiment according to the present invention, a configuration of an optical disk recording apparatus for encrypting and recording a content into the user data area, and a configuration of an optical disk reproducing apparatus for decrypting an encrypted content from data stored in the user data area;

Fig. 38 is a block diagram showing a configuration of a user data area within an optical disk of an eleventh preferred embodiment according to the present invention, a configuration of an optical disk recording apparatus for encrypting and recording a content into the user data area, and a configuration of an optical disk reproducing apparatus for decrypting an encrypted content from data of the user data area; and

Fig. 39 is a block diagram showing a configuration of a user data area of a DVD-ROM, and a configuration of an optical disk reproducing apparatus for decrypting an encrypted content from data of the user data area according to a prior art.

#### BEST MODE FOR CARRYING OUT THE INVENTION

Preferred embodiments according to the present invention will be described below with reference to the attached drawings.

#### FIRST PREFERRED EMBODIMENT

Fig. 1 shows a plan view illustrating a data recording area of an optical disk 100 of recording type of the first



preferred embodiment according to the present invention. This optical disk 100 of recording type is a recording medium which is capable of recording digital data, and includes a write-once type non-rewritable optical disk and a rewritable optical disk.

Referring to Fig. 1, 101 denotes a lead-in area for recording therein management information for the optical disk 100, and 102 denotes a user data area for recording therein digital data which needs copyright protection, such as (a) AV data content including at least one of image data (including still picture images and animated picture images) such as movies or the like, and speech sound data such as music or the like; and (b) computer software. 103 denotes a lead-out area for recording therein defect management information or the like.

The lead-in area 101 is constituted by a read-only area 104 in which data is recorded in a form of pre-pits, and a recording and reproducing area 105 which is a rewritable area with guide grooves. In this case, in the read-only area 104, a control area or the like which describes physical characteristics of the optical disk 100 is recorded in a form of pre-pits by the manufacturer. In the lead-out area 103 and rewritable area 105, data for writing test performed by an optical disk recording apparatus, management information for managing defects on the optical disk 100 are recorded by an optical disk recording apparatus. In addition, on the inner peripheral side of the

read-only area 104 in the lead-in area 101, a BCA 106 formed as disk individual information is once written on the optical disk 100 by the following well known method, after completion of the optical disk 100 on which content has been recorded.

5           Fig. 2A shows a block diagram and a cross sectional view illustrating an apparatus configuration when forming the BCA 106 of the optical disk 100 shown in Fig. 1, and Fig. 2B shows a cross sectional view of the optical disk 100 and a graph showing an intensity of reflected light in the horizontal  
10           direction after formation of BCA 106 of the optical disk 100 shown in Fig. 1.

Referring to Figs. 2A and 2B, an example of the optical disk 100 of double-side recording type is shown, and the optical disk 100 is constituted so that a recording layer  
15           202, a reflecting layer 203, a bonding layer 204, a reflecting layer 205 and a recording layer 206 are inserted between two substrates 201 and 207.

When the BCA is recorded on the optical disk 100, as shown in Fig. 2A, data after phase encoding modulation in  
20           a stripe form is recorded so as to overlap on pits by irradiating a laser beam in a form of pluses from a high power laser light source 211 onto, for example, the reflecting layer 205 of the optical disk 100 through a focusing lens 212 to eliminate or remove a part of the reflecting layer 205. Upon reproducing  
25           the signals, as shown in Fig. 2B, the signals, resulting from

a lowered amount of reflecting light from the portions where the reflecting layer 205 is eliminated or removed, are intermittently reproduced. The BCA data is reproduced through the phase encoding demodulation after the reproduced signals are binarized. The BCA formed by such a recording system can record a disk identifier which is specific information for each optical disk 100, and further, the BCA has such a feature that it is impossible to falsify recorded data.

Fig. 3 shows a view of a recording format of the BCA 106 shown in Fig. 1. As shown in Fig. 3, in the BCA 106, a synchronization code 301, an error detection code 302, an error correction code 303 and the like are recorded to improve the reading-out factor of the BCA data 304. By connecting the plurality of BCA data 304, a disk identification information 305 is constituted. In the disk identification information 305, there are recorded types of data that are recordable into the user data area and the types of data which are reproducible from the user data area. It is impossible for the data of BCA 106 to falsify, and therefore, this can limit to a certain degree of disk usage, by the user, by means of the disk identification information recorded when the optical disk 100 is manufactured.

Fig. 4 shows a sector structure of sector data 401 within the user data area 102 shown in Fig. 1. Referring to Fig. 4, the user data area 102 shown in Fig. 1 has a sector structure which is accessible by a unit of a certain amount,

and the sector data 401 is constituted by a header 402, main data 403 and an error detection code 404.

The main data 403 is an area in which AV data, computer data and the like are recorded. In the header 402, a data ID (data identifier) 405, an ID error detection code 406, scramble control information 407, key information 408 or the like are recorded. In the data ID 405, a logical address for identifying sectors or the like is recorded, and the ID error detection code 406 is provided for detecting errors in the data IDs. The scramble control information 407 is a flag for showing whether or not the main data has been scrambled, and in the key information 408, there is recorded information about a key for descrambling the main data. As the information about the key, the descramble key itself (in the modified preferred embodiment of the modified preferred embodiment of the first preferred embodiment) or a key index (in the first preferred embodiment), which is a pointer to the descramble key recorded onto another area of the optical disk 100, are recorded. An example of Fig. 4 shows the case where a key index is recorded for referring to the descramble key recorded in the key management information area 107 shown in Fig. 1 which is another area of the optical disk 100.

Fig. 5 shows a configuration of the key management information area 107 shown in Fig. 1. Referring to Fig. 5, the key management information area 107 is constituted by a key

information area 501, a content information area 502 and a key index list area 503.

In the key information area 501, the number of recorded key areas 504 is recorded, and the key information area 501 includes (a) a descramble key area 505 which is an area for recording the descramble key to descramble the scrambled AV data or the like, and (b) a key status area 506 for recording therein a recording status (indicating unused, area reservation, recorded or the like) of the descramble key recorded in the descramble key area 505. In the descramble key area 505, a plurality of descramble keys are recorded, and a key index for representing the stored position in the descramble key area 505 is recorded in the key index list area 503. The above-mentioned plurality of descramble keys are possible to be referred to by this key index. In the key status area 506, the status information for representing the recording status of the descramble keys is stored at a position which is possible to be referred to by the key index.

In the content information area 502, the contents recorded on the optical disk 100 are registered when copyright protection is necessary, and the information with respect to keys used for that content is registered. In the content information area 502, the number of contents 507 registered in the key index list area 503 and content information 508 for the content number are recorded. In addition, in the content

information 508, there are recorded a content ID for identifying the content, the number of descramble keys used for the content, and the pointer to the key index list 509 which records the used keys. The key index list area 503 is an area for recording  
5 indexes to refer to the keys used for the content in a form of in content unit. In the key index list area 503, a key index for referring to the entire recording area of the descramble keys used for the content is recorded.

The optical disk of recording type 100 constituted  
10 in this way makes it possible to control the recording operation and the reproducing operation in accordance with the protection level or the usage level of the copyright held by the contents, by recording information for representing conditions or status for disk usage on the disk identification information which is  
15 difficult to rewrite such as a region identifier, a data category identifier and a disk identifier upon manufacturing, and by detecting such information by an optical disk and reproducing apparatus. Since data is recorded so as to make it difficult to rewrite so that a user can not change data, even in the case  
20 that the copyright protected content is copied to another optical disk, the disk identification information cannot be copied while it remains possible to copy the user data area. Accordingly, by recording the data scrambled using the disk identification information on the optical disk, it can be  
25 prevented from reproducing correctly since there exists a user

data area which cannot be descrambled in the optical disk having different disk identification information.

Fig. 15A shows a diagram showing whether or not copying or reproducing the content is possible in the same region as well as in a different region in the case that a region identifier is recorded when the content is recorded in the first preferred embodiment, and Fig. 15B shows a diagram indicating whether or not the copying or the reproduction of the content is possible in the same region as well as a different region in the case that a region identifier is recorded in advance when the optical disk is shipped in the first preferred embodiment.

For example, as shown in Fig. 15A, in the case that a region identification code is not recorded when the optical disk is shipped, and the region identifier, for representing the region where the contents are available when the contents are recorded, is recorded in a recording and reproducing area, the usage can be prevented in another region. However, the contents are recordable in a disk (for a region RC2 shown in Fig. 15A) to be used in another region, and it is possible to reproduce the content correctly. A recording medium, in which a digital copying of the content is possible, is provided with a tax imposing system to protect the benefit of copyright holders which collects an added charge when the optical disk is sold. However, the added charge differs according to country and in the case that the recording medium to be used in another country

is utilized unjustly the possibility remains that the copyright holders will not be able to share in the appropriate profit.

As shown in Fig. 15B, by recording in advance at the time of shipping in such way that the region identifier cannot  
5 be falsified, copying or reproduction of the content to an optical disk to be used in another region can be prevented. In a manner similar to that of above, in the case that a data category identifier is recorded as disk identification information, copying or reproduction of the content to the disk  
10 on which the data is recordable and reproducible can be limited by comparison between category identifiers which the record data have. In the case that an inherent disk identifier for each optical disk is recorded as disk identification information, the recorded data can be made available only by  
15 the optical disk by encrypting the recorded data with the disk identifier.

In the present preferred embodiment, the data scrambled by the disk identification information may be AV data or computer data which needs copyright protection or may be  
20 descramble keys for descrambling scrambled AV data or computer data.

Fig. 13 shows a block diagram showing a method for judging whether or not a descramble key is a regular descramble key based on the encrypted descramble key according to the  
25 modified preferred embodiment of the modified preferred



embodiment of the first preferred embodiment. As shown in Fig. 13, the data obtained by adding an error detection code for detecting errors in the descramble key to the descramble key may be scrambled using disk identification information to  
5 calculate an encrypted descramble key, which may be recorded on the optical disk. In the optical disk reproducing apparatus, the encrypted descramble key is decrypted into a descramble key, and an error detection code so that it is judged whether or not the decrypted descramble key is a regular descramble key by  
10 detecting errors based on the parity check in the decrypted error detection code. For example, in the case of descrambling using different disk identification information, an error descramble key is produced so that an irregular copy can be detected by checking the error detection code for determining that it is  
15 not any regular descramble key.

As another method for recording disk identification information, by preparing stampers formed with a plurality of types of disk identification information in a form of pre-pits and by forming an optical disk from each of the stampers,  
20 different usage limitation may be given to respective optical disks formed from different stampers. In addition, by scrambling the disk identification information using a secret key and by recording the scrambled disk identification information on the optical disk, the protective level of the  
25 copyright described in the disk identification information is

kept unknown to the users, and as a result, the copyright protection is further enforced.

The case where the descramble key itself is recorded as the information about the key described in Fig. 4 (in the modified preferred embodiment of the first preferred embodiment) and the case where the key index, which is a pointer to the descramble key recorded in another area of the disk, is recorded (in the first preferred embodiment) will be described with reference to Figs. 6A and 6B. Fig. 6A shows a block diagram showing a recording method for recording a descramble key and AV data in the sector data 401 shown in Fig. 1 according to the modified preferred embodiment of the first preferred embodiment, and Fig. 6B shows a block diagram showing a recording method for recording a key index and AV data to a descramble key in the sector data 401 shown in Fig. 1 according to the first preferred embodiment.

In the case of Fig. 6A, in the same sector data 401, the main data 403 and the descramble key which is key information 408a required for descrambling of the main data 403 are recorded. Thus, it is necessary to acquire a descramble key required for descrambling when AV data are recorded. That is to say, the acquisition or the purchase of the key itself are indispensable or inevitable when AV data are recorded.

On the other hand, in the case of Fig. 6B, in the same sector data 401, the main data 403, and the key index which

is the key information 408 for referring to the descramble key area for recording the necessary information for descrambling the main data 403 are recorded, and the descramble key is recorded in an area designated by the key index. When the AV data are recorded, the key ID indicating which key among the keys used in the recorded content can descramble is acquired, and the key information 408 is acquired which is a key index corresponding to the key ID from the key index list included in the content information, which is recorded together with the main data 403. The recording of the descramble key is carried out when the descramble key is obtained to be recorded in the descramble key area shown by the key index corresponding to the key ID. As a result, AV data and the descramble key corresponding to the AV data can be recorded independently. That is to say, the recording of AV data and acquisition or purchase of the key can be carried out independently so that the acquisition or the purchase of the key is not necessarily required when the AV data are recorded. It becomes possible for the user to utilize a method for recording the content and acquiring the key when actually reproducing.

Fig. 14 shows a configuration view of a descramble area management table according to a modified preferred embodiment of the first preferred embodiment. In the above-mentioned preferred embodiments, in order to correlate the encrypted content with the descramble key for descrambling

its cipher the cases in which the key index is recorded for referring the descramble key to the same sector data 401 are described, however, the descramble area management table shown in Fig. 14, which manages the corresponding relationships  
5 between the address range of the sectors in which the encrypted content is recorded and the descramble key, may be used. This descramble area management table represents the address range of the sector in which the encrypted content is recorded with the starting address and the completion address, and when the  
10 data of the sector is reproduced, the descramble key is referred to and then the encrypted content is descrambled.

In order to acquire the recorded content and the descramble key used for the recorded content, the contents ID that makes the content identifiable is utilized. As shown in  
15 Fig. 5, in the content information recorded in the content management list within the content information area 502 recorded on the optical disk, the content ID and the list of the descramble key used for the content are recorded. By having a list configuration where a plurality of descramble keys can  
20 be used for one piece of content, such services are made available that a part of the content or a part of the software can be sold.

In the modified preferred embodiment mentioned above in reference to Fig. 13, when the data where the descramble key  
25 to which the error detection code is added such as a check sum

or a cyclic redundancy check code is scrambled in the disk identification information is copied unjustly onto another disk, it can be detected as an error by descrambling with different disk identification information. In such a case, it is also possible to acquire a descramble key that is scrambled by disk identification information recorded on the optical disk, and to form a disk which can reproduced correctly by replacing that descramble key with the acquired descramble key.

The key management information area 107 shown in Fig. 1 is recorded in a lead-in area 101 which is rewritable. Generally, the user data area 102 comprises a user area which is accessible from a drive apparatus of a personal computer, and a spare area for the defect sector on an optical disk, and for the conventional READ command and WRITE command, only the user area can be accessible as a logical continuous area. By placing the key management information in the lead-in area 101, direct access from the drive apparatus of the personal computer or the like can be prevented so that it can be made impossible to acquire a key for descrambling the scrambled AV data or the like from the personal computer.

#### SECOND PREFERRED EMBODIMENT

Fig. 7 shows a block diagram illustrating a configuration of an optical disk recording and reproducing apparatus of the second preferred embodiment according to the present invention. This optical disk recording and reproducing

apparatus is provided for recording contents of AV data such as image data or music data which require copyright protection for the optical disk 100 according to the first preferred embodiment.

5               Referring to Fig. 7, 701 denotes an optical disk of the first preferred embodiment, 702 denotes an optical head which is an optical pickup constituted by a semiconductor laser and optical elements, and 703 denotes a recording and reproducing control circuit for controlling the operation of  
10 the semiconductor laser and for binarizing the reproduced signals. 704 denotes a modulating and demodulating circuit for digitally modulating digital data to be recorded and digitally demodulating the binarized reproducing signals, and 705 denotes an error detecting and correcting circuit for error detection  
15 and correction processing of errors caused by scratches, dust or the like on the optical disk 701 and for performing error correction code generation processing required for the error detection and correction processing. 706 denotes a buffer  
memory of a RAM used for a working memory and a data buffer memory  
20 of the error detecting and correcting circuit 705, 707 denotes a descramble circuit for descrambling scrambled recorded AV data, and 708 denotes an MPEG decoding circuit for expanding compressed recorded dynamic image data or the like. 709 denotes an output circuit for D/A converting expanded image data to  
25 generate and output video signals and audio signals, 710 denotes

a control CPU for controlling the entire operation of the optical disk recording and reproducing apparatus, and 711 denotes a communication circuit for acquiring a descramble key for descrambling the cipher placed in the contents. 712 denotes a data receiving circuit for receiving digital data of the encrypted content such as image data and music data from a communication terminal apparatus such as a set-top box.

A data recording operation of the optical disk recording and reproducing apparatus of Fig. 7 constituted as described above will be described. The digital data of the encrypted contents such as image data or music data transmitted from the communication terminal apparatus such as a set-top box or an MPEG encoder are temporarily stored in the buffer memory 706 after being received by the data receiving circuit 712. The error detecting and correcting circuit 705 generates error detection and correction code required for the error detection and correction process caused by scratches or dust on the optical disk 701 in the digital data of the stored contents to reconfigure the record data. For the error detection and correction code, a code such as a well known Reed-Solomon code is used. In this case, the reconstituted record data includes digital data of content and error detection and correction code. The modulating and demodulating circuit 704 uses a modulation system such as an 8/16 modulation system upon recording, and digitally modulates the record data. Also, the recording and

reproducing control circuit 703 modulates the intensity of the power of the laser beam outputted from the optical head 702 according to the record data modulated digitally so that the laser is irradiated onto the optical disk 701 to record the  
5 record data onto the optical disk 701.

Fig. 8 shows a flowchart indicating an AV data recording process carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7.

10 Referring to Fig. 8, first of all, in step S801, the disk identification information of the lead-in area 101 is reproduced prior to recording of the AV data from the optical disk 701, then in step S802 it is determined whether or not the digital data of the contents to be recorded at the present are  
15 recordable from the type or class of data recordable in the user data area 102 which are recorded in the disk identification information. In the case of YES in step S802, the program flow proceeds to step S803, while in the case of NO, the recording operation is stopped in the step S810, and then, the recording  
20 process of the AV data is completed.

In step S803, the data of the sector where the key management information is recorded in the lead-in area 101 is reproduced, and in step S804 it is determined whether or not an area is allocated for the key information required for  
25 recording the contents in the reproduced key management



information. In the case of NO in step S804, after allocating an area for recording the key information in the key management information area 107, the program flow proceeds to step S806. On the other hand, in the case of YES in step S804 the program  
5 flow directly proceeds to step S806.

In the case that the content is recorded, the control CPU 710 of the optical disk recording and reproducing apparatus receives the record data of the encrypted content, and information with respect to the descramble key for descrambling  
10 the cipher via the data receiving circuit 712, from the communication terminal apparatus. In this case, the information with respect to the key is the key itself used for the contents or a key ID for indicating to which key it corresponds among the keys used in the entire contents. In the  
15 case that the key ID is received, in step S806, the received key ID is converted into a key index which is a pointer for indicating an area where a descramble key corresponding to the key ID is recorded, and the converted descramble key is placed in a header area of the sector where the data of the contents  
20 to be decrypted with the descramble key is recorded. Then, in step S807, the control CPU 710 carries out the following record data processing by controlling the recording and reproducing control circuit 703, the modulating and demodulating circuit 704 and the error detecting and correcting circuit 705. In this  
25 processing, the codes for the error detection and correction

is added to the sector data which is desired to be recorded, and then, the sector data with those codes added are digitally modulated by using a modulation system such as a well known 8/16 modulation system so that the optical head 702 is controlled to locate at a predetermined recording position, and the intensity of the laser beam is modulated according to the record data digitally modulated. By doing this, the record data is recorded on the optical disk 701, and in addition, in step S808 it is determined whether or not the recording of the contents has been completed, and in the case of NO, the program flow goes back to step S806 to repeat the above-mentioned processing. In the case of YES in step S808, the updated key management information is recorded in the key management information area 107 on the optical disk 701 in step S809, and then, the recording process of the AV data is completed.

Fig. 9 shows a flowchart showing an allocating process of the key management information area carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7. This process is provided for allocating areas for recording a descramble key prior to recording data of content.

Referring to Fig. 9, in step S901, for example the information with respect to the key of the content recorded from an electronic program guide or the like (including the number of used descramble keys) is acquired, and then, in step S902,

the key management information within the key management information area 107 recorded in the optical disk 701 is reproduced. Then in step S903, empty areas of the descramble key area 505 are searched from the key status area 506 so as to determine whether or not the descramble key used in the content to be recorded can be recorded. In the case of NO in step S903, the recording operation is stopped in step S907, and then, the allocating process is completed. On the other hand, in the case of YES in step S903, the contents to be recorded are registered in the content list within the content information area 502 so that recording areas are allocated by setting area reservation flags in corresponding key status areas in order to reserve an area required for the recording of descramble key in the descramble key area 505 in step S905. In addition, in step S906, a key index indicating allocated areas for recording descramble keys are formed as a key list, and then, after a pointer set as the content information is allocated, the allocation process is completed.

Fig. 10 shows a flowchart showing a recording process of the descramble key carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7. This recording process is provided for recording a descramble key acquired from a key management center in the optical disk 701.

Referring to Fig. 10, first of all, in step S1001,

after the disk identification information of the lead-in area 101 on the optical disk 701 is reproduced, the disk identification information and the key ID for identifying keys required for descrambling for the desired content are

5 transmitted to the key management center via the communication circuit 711 in order to acquire a descramble key from the key management center in step S1002. In the key management center, a descramble key required for descrambling of the content from the given key ID are selected so that the descramble key are

10 encrypted using the information, such as the transmitted disk identification information, and then returned.

After the descramble key corresponding to the key ID is acquired via the communication circuit 711 from the key management center in step S1003, the data of the key management

15 information area 107 is reproduced so that the key index for indicating an area for recording the descramble key is acquired from the key index list indicated by key ID among the data within the reproduced key management information area 107 in step S1004. Then in step S1005, the descramble key acquired above is

20 allocated in the descramble key area indicated by the key index, and an acquired flag for indicating a key acquired in the corresponding key status area 506 is set. In addition, in step S1006, whether or not the acquisition of all the keys are completed is determined, and then, in the case of NO the

25 above-mentioned process is repeated by returning to step S1003.

On the other hand, in the case of YES in step S1006, the updated key management information is recorded in the key management information area 107 in step S1007, and then, the descramble key recording process is completed.

5               Next, the data reproducing operation of the optical disk recording and reproducing apparatus of the present embodiment will be described in reference to Fig. 7. The digital data recorded on the optical disk 701 is reproduced as follows. A laser beam from the semiconductor laser from the  
10               optical head 702 is irradiated onto the optical disk 701 so that, at that time, the reflected light which is reflected on the optical disk 701 is entered into the recording and reproducing control circuit 703 via the optical head 702. The recording and reproducing control circuit 703 generates and outputs a  
15               generated reproduced binarized signal to the modulating and demodulating circuit 704 by carrying out amplification and by a binarizing process after photoelectrically converting the entered reflected light. The modulating and demodulating circuit 704 digitally demodulates the digitally modulated  
20               signal into a digital signal by using a modulating system such as a well known 8/16 modulating system upon recording, and then, outputs the resulting digital signal to the error detecting and correcting circuit 705. Then the error detecting and  
25               correcting circuit 705 uses the buffer memory 706 as a working memory to carry out detecting and correcting processes of the

errors caused by scratches or dust on the optical disk 701. This error detecting and correcting process is carried out by decoding, for example, well known Reed-Solomon code.

The reproduced data which are processed for error  
5 detection and correction is outputted to the descramble circuit 707 for carrying out the descramble process. The descramble circuit 707 uses the descramble key of the key management information area 107 reproduced prior to the data reproduction in advance, and performs a descramble process for the reproduced  
10 data, which is then outputted to the MPEG decoding circuit 708. Then the MPEG decoding circuit 708 expands the compressed dynamic image data and music data, and then, the expanded data is outputted to the output circuit 709. In addition, the output circuit 709 D/A converts the inputted expanded data into video  
15 and audio signals, and outputs the resulting video and audio signals to upper-level apparatuses such as a television set, an audio device or the like.

Fig. 11 shows a flowchart showing a reproduction process of AV data carried out by the control CPU 710 of the  
20 optical disk recording and reproducing apparatus shown in Fig. 7.

Referring to Fig. 11, first of all, in step S1101, prior to recording of the AV data from the optical disk 701, the disk identification information within the lead-in area 101  
25 is reproduced, and in step S1102, it is determined whether or

not the content desired to be reproduced at present is reproducible from the types of reproducible data recorded in the disk identification information. In the case of NO in step S1102, the reproducing operation is stopped in step S1112, and  
5 then, the reproducing process of the AV data is completed. On the other hand, in the case of YES in step S1102, the data in the sector where the key management information is recorded within the key management information area 107 of the lead-in area 101 are reproduced, and it is determined whether or not  
10 the key information required for the reproduction of the content has been recorded in the key management information reproduced in step S1104. In the case of YES in step S1104, the program flow proceeds to step S1106 directly. On the other hand, in the case of NO in step S1104, in step S1105, a descramble key  
15 is acquired via the communication circuit 711 from the key management center which manages the keys, and is recorded in the key management information area 107 on the optical disk 701, then, the program flow proceeds to step S1106.

Then in step S1106, the control CPU 710 makes the  
20 optical head 702 move to the user data area of the optical disk 701, and controls the recording and reproducing control circuit 703, the modulating and demodulating circuit 704 and the error detecting and correcting circuit 705 so that the AV data are reproduced. Then in step S1107, the descramble key required  
25 for the descrambling of the sector data is acquired from the

descramble key area 505 indicated by the key index included in the header of the reproduced sector, and then, in step S1108, the scrambled information for the descramble key is decoded by descrambling by means of the disk identification information.

5 In addition, in step S1108, by checking the error detection code added to the descramble key, it is determined whether or not the descramble key has an error. In the case of YES in step S1108, the contents are judged as obtained irregularly (or the contents are copied irregularly), the reproducing operation is  
10 stopped in the step S1112, and then, the reproducing process of the AV data is completed.

On the other hand, in the case of NO in step S1108, the data of the content is descrambled by the descramble key in S1109, and the descrambled AV data is outputted to the MPEG  
15 decoding circuit 708 in step S1110. Then the control CPU 710 MPEG-expands the descrambled AV data through a predetermined MPEG system by controlling the MPEG decoding circuit 708 and the output circuit 709, and then, the MPEG-expanded AV data is D/A converted into video signals and audio signals to  
20 be outputted to upper-level devices such as a television set, an audio device or the like. Then in step S1111, it is determined whether or not the reproduction of the content is completed, and in the case of NO the program flow returns to step S1106 to repeat the above-mentioned process. On the other hand, in  
25 the case of YES in step S1111, the reproducing process of the



AV data is completed.

In the case that an error is detected in step S1109, the content is regarded as obtained irregularly, for example, the content is regarded as copied irregularly, the reproducing operation is stopped. However, the key information may be acquired from the key management center which manages the keys via the communication circuit 711 and recorded in the key management information area 107 on the optical disk 701 by carrying out the process of step S1105 in the same way as the case where any key is not recorded. By doing this, even the copied AV data can become reproducible by obtaining the key in a regular procedure.

Fig. 12 shows a flowchart showing an acquiring process of descramble key carried out by the control CPU 710 of the optical disk recording and reproducing apparatus shown in Fig. 7. This process is provided for reproducing descramble keys from the reproduced key index, and this process is carried out prior to the reproducing process of the AV data as shown in Fig. 11.

Referring to Fig. 12, first of all, in step S1201, it is determined whether or not the data in the reproduced sector area is scrambled by the scramble control information, and in the case of NO, the program flow proceeds to step S1206. On the other hand in the case of YES in step S1201, a key index is acquired by reproducing key information recorded in the same

sector area as the above-mentioned sector area in step S1202, and then, the descramble key indicated by the above-mentioned key index is acquired from the descramble key area 505 in step S1203, and afterwards in step S1204, the acquired descramble key is descrambled by using the disk identification information, and it is determined whether or not an error exists in the descramble key by checking the error detection code. In the case of YES in step S1204, the reproducing operation is stopped in step S1205, and the acquiring process of the descramble key is completed. On the other hand, in the case of NO in step S1204, the program flow proceeds to step S1206. When the reproduced sector is not scrambled or when any error is not found to exist as a result of descrambling the descramble key by the disk identification information, permission for the reproducing operation is granted in step S1206, the data of the reproduced sector is outputted, and then, the acquiring process of the descramble key is completed.

As described above, in the optical disk and in the optical disk recording and reproducing apparatus of the preferred embodiment according to the present invention, the recording and reproducing operations can be controlled by the user by using disk identification information for read-only made at a disk manufacturing stage. In addition, by scrambling a part of the data using the above-mentioned disk identification information, it can be prevented from reproducing normally data

on the disk where the user data area is physically copied. Also, by allocating the descramble key required for the data descrambling in a different area from that for the data, the recording of the content and the recording of the descramble key can be carried out independently. Thus, by recording the contents and by acquiring the descramble key if necessary, for example, when the data of the content are reproduced, the content can be maintained in a reproducible state or status. At this time, by scrambling the descramble key with the disk identification information, an irregular usage through physical copying can be explicitly prevented in the same way as that described above. In addition to this, a disk copied irregularly could become an optical disk which can be reproduced normally by formally acquiring the descramble key scrambled with the disk identification information of the optical disk from the key management center and by recording the acquired descramble key in the optical disk.

Although already encrypted data of the content inputted to the optical disk recording and reproducing apparatus are described above, by providing a circuit for encrypting the content within the optical disk recording and reproducing apparatus, the same effects can be obtained by encrypting the data of the inputted contents and recording that data on the optical disk.

Although in the present preferred embodiment, by

encrypting only the descramble key which is required for decrypting the encrypted content using the disk identification information, copying between the disks having different disk identification information is prevented, copying can be prevented by encrypting the content itself using the disk identification information. In addition, by encrypting the disk identification information using a secret key, it becomes possible to make the irregular decrypting of the content recorded on the disk more difficult.

10           ADVANTAGEOUS EFFECTS OF FIRST AND SECOND PREFERRED EMBODIMENTS

          An optical disk of the preferred embodiment according to the present invention records the disk identification information carrying out the recording operation and the reproducing operation into the user data area for each optical disk in a read-only area which is not rewritable, and therefore, the optical disk thereof can control the recording operation and the reproducing operation of the contents onto the optical disk by the user by using the information recorded upon manufacturing the optical disk.

          An optical disk of the preferred embodiment according to the present invention can prevent the disk identification information from being copied in order to make the correct decoding and reproduction of the data impossible even in the case where the user data area information is copied by the user

onto a different recording-type of optical disk by recording the encrypted data in the user data area of the optical disk with a key of the disk identification information of read-only which is impossible to be rewritten.

5           An optical disk of the preferred embodiment according to the present invention makes it possible to carry out independently (a) acquisition of the data which need copyright protection such as movies, music and (b) acquisition of the descramble key for decrypting the encryption, by recording the  
10 encrypted data and the descramble key for decrypting the encryption in different sector areas. In addition, by encrypting and recording the descramble key with a key of the disk identification information, even in the case where the user data area information is copied onto another recording-type  
15 optical disk by the user, the disk identification information cannot be copied, and correct decoding and reproduction of the data becomes impossible and by acquiring and recording the encrypted descramble key with a key of the disk identification information on the optical disk where it is copied, correct  
20 decoding and reproduction of the data can be made possible.

#### THIRD PREFERRED EMBODIMENT

Next, an encrypted content recording and reproducing method of a third preferred embodiment according to the present invention will be described in reference to the drawings. Fig.  
25 16 shows a plan view illustrating a data recording area of an

optical disk 1101 of the third preferred embodiment according to the present invention.

Referring to Fig. 16, 1101 denotes a recording medium which can record digital data, and which is a recording-type optical disk such as a rewritable or non-rewritable optical disk, 1102 denotes a control user data area in which disk information is recorded in a form of minute concavo-convex pits, and 1103 denotes a user data area in which the user records data by irradiating a light beam of laser onto the optical disk. 1104 denotes an BCA in which disk ID is recorded. In the BCA 1104, a recording film on minute concavo-convex pits in an inner periphery section of the control user data area 1102 is trimmed by partially irradiating a laser beam of pulse laser such as a YAG laser or the like onto the recording film, so that a plurality of trimming areas 1105 is formed in an elongated shape in the radius direction, thereby to record a disk ID which is the descrambled identification information.

Fig. 17 is a waveform diagram showing a signal waveform of a reproduced signal 1201 and a reproduced binarized signal 1207 in a BCA reproducing circuit 1401 according to the third preferred embodiment, and Fig. 18 shows a block diagram illustrating a configuration of the BCA reproducing circuit 1401 according to the third preferred embodiment. Fig. 17 shows a reproducing signal 1201 when data of the BCA 1104 is reproduced. In Fig. 18, 1301 denotes an optical pickup, 1302 denotes a

pre-amplifier, 1303 denotes a low-pass filter (LPF), 1304 denotes a binarizing circuit, and 1305 denotes a demodulation circuit.

Referring to Fig. 18, a laser beam outputted from the optical pickup 1301 irradiates the BCA 1104 of the optical disk 1101, and the reflected light is photoelectrically converted by the optical pickup 1301, and thereafter, an electric signal which has been photoelectrically converted is amplified by the pre-amplifier 1302 to obtain a reproduced signal 1201. In this case, the reproduced signal 1201 shown in Fig. 17 has a level corresponding to the concavo-convex pits of the control user data area 1102, and in this reproduced signal 1201, each of 1202, 1203 and 1204 denotes a trimming portion where signals in a form of concavo-convex pits drop out when the recording film is removed by the trimming process by the pulse laser. This trimming process is carried out by the manufacturer of the optical disk.

Referring back to Fig. 18 for the description, the reproduced signal 1201 is inputted to the low-pass filter 1303, which then removes the modulated signal formed by the concavo-convex pits, and thereafter, outputs a resulting signal to the binarizing circuit 1304. The reproduced signal inputted into the binarizing circuit 1304 is binarized by using a slice level 1206 which is a level significantly lower than the slice level 1205 instead of the normal slice level 1205 which binarizes

a signal of control user data area 1102, to obtain the reproduced binarized signal 1207. The reproduced binarized signal 1207 outputted from the binarizing circuit 1304 is demodulated by a demodulation circuit 1305, to obtain the disk ID signal 1306.

5           As described above, by adding the disk identification information for identifying an optical disk, management of the optical disk can be easily implemented. Also, by recording the BCA 1104 in a form of concavo-convex pits, the information for identifying the optical disks within the BCA 1104 can be  
10 prevented from being easily falsified. In addition, since the control user data area 1102 and the BCA 1104 shown in Fig. 16 are adjacent from each other, the data of the BCA 1104 can be continuously reproduced when the data of the control user data area 1102 are reproduced, or the data of the control user data  
15 area 1102 can be continuously reproduced when the data of the BCA 1104 are reproduced, and therefore, it becomes possible to accelerate the process for obtaining the information of the BCA 1104 for identifying optical disks quickly by the CPU when, for example, the optical disk is started up, and for recording the  
20 encrypted content.

          Although the BCA 1104 of the preferred embodiment is formed so as to trim the recording film in a form of concavo-convex pits in the inner periphery section of the control user data area 1102, the recording film, which  
25 constitutes an optical disk of recording type which is either



a rewritable or non-rewritable optical disk, is easily affected by heat as compared with the reflecting film formed on a read-only optical disk. By trimming the inner periphery section of the control user data area 1102, the user data area 5 1103 can be protected from the heat emitted upon trimming as compared with the case where the outer periphery section is trimmed. Also, the reason why the BCA 1104 is formed on the inner peripheral side of the control user data area 1102 is that a margin should be taken into consideration in the case that 10 the diameter of the spot of a laser beam changes due to the instability of a focusing servo circuit of the laser device.

The data recorded in the BCA 1104 before trimming may be recorded in the control user data area 1102. The data recorded in the BCA 1104 are also recorded in the control user 15 data area 1102, and this leads to that the above data of the control user data area 1102 can be protected from the trimming. In addition, when the data recorded in the BCA 1104 is recorded continuously and repetitively from the BCA 1104 to the control user data area 1102, the position of the BCA 1104 can be predicted 20 by finding the above data of the control user data area 1102.

Next, the procedure for recording the encrypted content by the disk ID through a network on an optical disk 1101 having the above-mentioned BCA 1104 will be described. In the third to fifth preferred embodiments, a network means, for 25 example, the Internet, the public telephone line or the other

communication lines such as leased lines or circuits. Fig. 19 shows a block diagram illustrating a configuration of an optical disk recording and reproducing system according to the third preferred embodiment, and illustrates an apparatus

5 configuration for recording encrypted contents on an optical disk of recording type 1101, which is either a rewritable or non-rewritable optical disk having the above-mentioned BCA 1104.

Referring to Fig. 19, an optical disk recording and  
10 reproducing system is constituted by comprising an optical disk recording and reproducing apparatus 1410, and an encryption section 1406 connected to each other through a network 1405 such as the Internet. The optical disk recording and reproducing apparatus 1410 comprises an optical pickup 1301, a BCA  
15 reproducing circuit 1401, the Internet 403, a recording circuit 1411, a data reproducing section 1412 and an encryption decoder 1413. Also, the encryption section 1406 comprises an interface 1404, a content memory 1407, and an encryption encoder 1408.

First of all, a laser beam outputted from the optical  
20 pickup 1301 irradiates, for example, the BCA 1104 of the RAM type optical disk 1101, and then, after the reflected light is photoelectrically converted by the optical pickup 1301, a reproduced signal which has been photoelectrically converted is inputted to the BCA reproducing circuit 1401. The BCA  
25 reproducing circuit 1401 reproduces a disk ID signal 1402 within

the BCA based on the inputted reproduced signal, outputs the reproduced disk ID signal 1402 to the encryption decoder 1413, and also simultaneously output the same disk ID signal 1402 to the encryption encoder 1408 of the encryption section 1406 via the interface 1403 and 1404 as well as the network 1405. The encryption encoder 1408 encrypts data of content or scrambles data of content for image and speech sound, so that the disk ID signal 1402 becomes a decipher key for decrypting the encryption on the optical disk 1101 where the data of the content within the content memory 1407 is recorded.

In the present preferred embodiment, a process of encrypting the content 1407 using the disk ID signal 1402 as a cipher key means the same as the encrypting process. Also, in the present preferred embodiment, encrypting and decrypting are considered as a relationship between a lock and a key, so that closing the lock with the key is referred to encrypting and opening the lock with the key is referred to decrypting. Accordingly, encrypting and decrypting differ in the actual operation from each other, however, the keys for encrypting and for decrypting are the same as each other. The content 1407 is denoted by C, the disk ID signal 1402 is denoted by BCAS, the encrypted content 1409 is denoted by C[BCAS], and the operation for the encrypting process is denoted by \*. Then the following equation can be represented:

$$C * BCAS = C [BCAS] \quad (1).$$

The content 1409 encrypted by the encryption section 1406 is sent to a recording circuit 1411 of the recording and reproducing apparatus 1410 via the interface 1403 and 1404 as well as the network 1405. The recording circuit 1411 digitally  
5 modulates data of the inputted content in a predetermined manner, and records the data of the content onto the optical disk 1101 by modulating the intensity of the laser beam from the optical pickup 1301 corresponding to the digitally modulated data and irradiating the laser beam onto the optical disk 1101.

10           Next, when the above content encrypted and recorded on the optical disk 1101 is reproduced, a laser beam outputted from the optical pickup 1301 irradiates the area where the above encrypted content of the user data area 1103 is recorded, and after the reflected light is photoelectrically converted by the  
15 optical pickup 1301, the reproduced signal which has been photoelectrically converted is inputted to the data reproducing section 1412. The data reproducing section 1412 A/D converts the inputted reproduced signal into digital data, and outputs the digital data to the encryption decoder 1413. On the other  
20 hand, a laser beam from the optical pickup 1301 is irradiated onto the BCA 1104 of the optical disk 1101, and after the reflected light is photoelectrically converted by the optical pickup 1301, the reproduced signal which has been  
photoelectrically converted is inputted to the BCA reproducing  
25 circuit 1401. The BCA reproducing circuit 1401 A/D converts

the inputted reproducing signal to generate the disk ID signal 1402, and then, the disk ID signal 1402 is outputted to the encryption decoder 1413.

The encryption decoder 1413 uses the inputted disk ID signal 1402 as a key for decrypting the data of the encrypted content. At this time, when the content is regularly recorded on the optical disk 1101, the key for decrypting the encrypted content recorded on the optical disk 1101 is the disk ID signal 1402 of the optical disk 1101, and the disk ID signal 1402 outputted from the BCA reproducing circuit 1401 upon reproduction is also the disk ID signal (BCAS) of the optical disk 1101. Accordingly, the content which is either decrypted or descrambled is outputted from the encryption decoder 1413 as an output signal 1414. When the operation for the decoding process is denoted by #, the following equation can be represented:

$$C [BCAS] \# BCAS = C \quad (2).$$

In this case, when data of the content is image data, the image data such as an MPEG signal is expanded to obtain data of an image signal.

As described above, the encrypting of the present preferred embodiment has a disk ID as a key, and since only one disk ID exists corresponding to one optical disk, there is such an advantageous effect that the same encrypted content can be recorded only on that optical disk. That is to say, when the

above describe that content 1407 is attempted to be copied and reproduced onto another optical disk which has another disk ID of ID2 from a regular optical disk which has, for example, a disk ID of ID1, ID2 is outputted as the disk ID signal 1402 from the BCA reproducing circuit 401. However, the encrypted content is encrypted with a disk ID signal of ID1, therefore, the encrypted content can not be decoded by the encryption decoder 1413.

The encrypting encoder 1408 is not located at a supplying source of the content, and is located on the side of the recording and reproducing apparatus in the network, then it may be formed in a form of an IC card or the like on which the encrypting encoder is mounted. Also, since the above-mentioned optical disk 1101 is encrypted using only the disk ID, data can be reproduced with an arbitrary optical disk recording and reproducing apparatus having the BCA reproducing circuit 1401 and the encryption decoder 1413.

#### FOURTH PREFERRED EMBODIMENT

Next, an encrypted content recording method of the fourth preferred embodiment according to the present invention will be described in reference to the drawings. Fig. 20 is a block diagram illustrating a configuration of an optical disk recording and reproducing system of a fourth preferred embodiment according to the present invention, which shows an apparatus configuration for recording encrypted content on a

recording-type optical disk which is either rewritable or non-rewritable optical disk having a BCA. In the description of the fourth preferred embodiment, the description for the elements shared with the third preferred embodiment are  
5 omitted.

Referring to Fig. 20, the optical disk recording and reproducing system according to the fourth preferred embodiment comprises a CATV company apparatus 1501, a key issuing center apparatus 1507, a CATV decoder 1506, an optical disk recording  
10 and reproducing apparatus 1514, and a television set 1530. In this case, the CATV company apparatus 1501 comprises a content memory 1502 for storing data of content such as movie software, a first cipher key memory 1503 for storing a first cipher key and a first cipher encoder 1504. Also, the key issuing center  
15 apparatus 1507 comprises a control section 1507a for controlling the operation of the apparatus 1507, a time limiting information memory 1510 for storing time limiting information, and a recording admission code memory 1511 for storing a limiting admission code. In addition, the CATV decoder 1506 comprises  
20 a system ID memory 1508 for storing a system ID of the CATV decoder 1506, a first cipher decoder 1513, a second cipher encoder 1516, and a company identification signal memory 1523 provided within an IC card 1522. Furthermore, the optical disk recording and reproducing apparatus 1514 comprises a recording  
25 circuit 1518, a data reproducing section 1519, a BCA reproducing

circuit 1521, a second cipher decoder 1520, and a company identification signal memory 1526 provided within an IC card 1524.

First of all, the first cipher encoder 1504 of the  
5 CATV company apparatus 1501 encrypts the data of the content stored in the content memory 1502, such as movie software, using a first cipher key stored in the first cipher key 1503, thereby to generate a first encrypted content 1505. Then the generated first encrypted content 1505 is transmitted to the first cipher  
10 decoder 1513 of the CATV decoder 1506 for each user via the network. When the data stored in the content memory 1502 is denoted by C, the first cipher key 1503 is denoted by FK, and the first encrypted content 1505 is denoted by C[FK], then the following equation can be represented:

$$15 \quad C * FK = C [FK] \quad (3).$$

The CATV decoder 1506 transmits, via the network to the key issuing center apparatus 1507,

(a) a system ID for the CATV decoder 1506 stored in the system ID memory 1508; and

20 (b) a title code 1509 inputted by using, for example, a keyboard (not shown) of the CATV decoder 1506, which is added in advance to the above-mentioned content desired to be recorded on the audio-type or RAM-type optical disk 1101. In this case, the title code 1509 may be inputted by being selected according  
25 to the TV screen or may be inputted directly using the keyboard



or may be inputted from a remote controller or the like.  
Accordingly, the title code 1509 may be obtained by user's  
acquisition in his own way, or may be to the CATV decoder 1506  
together with the first encrypted content 1505. The title code  
5 1509 may be sent in advance at a different time from that of  
the first encrypted content 1505 in a form such as a program  
guide.

Based on the system ID of the CATV decoder 1506 and  
the title code 1509 of the above-mentioned content, the control  
10 section 1507a of the key issuing center apparatus 1507 refers  
to the time limiting information stored in the time limiting  
information memory 1510 and the recording admission code stored  
in the recording admission code memory 1511, and transmits a  
key (K) 1512 corresponding to these data of the recording  
15 admission code and the time limiting code, together with the  
recording admission code and the time limiting code, via the  
network to the first cipher decoder 1513 of the CATV decoder  
1506. The time limiting information allows the same content  
to be distinguished among the cases where the same content is  
20 broadcasted a plurality of times at different times. When the  
first decipher key is denoted by FK, the system ID of the CATV  
decoder 1506 is denoted by DID, the time limitation information  
is denoted by TIME, the recording admission code is denoted by  
COPY, and the title code 1509 of the content is denoted by T.  
25 Then, the key (K) satisfies the relationship indicated by the

following equation:

$$FK = K * T * DID * TIME * COPY \quad (4).$$

It is determined whether the recording admission code stored in the record permission code memory 1511 is permitted  
 5 only for watching and listening, or for both of watching and listening, and recording, based on a judgment result when the CATV company apparatus 1501, for example, judges whether or not the broadcast content is a new work or an old work.

The first cipher decoder 1513 of the CATV decoder  
 10 1506 decrypts the first encrypted content 1505 when the first decipher key (FK), the key (K) 1512, the title code 1509 of the above-mentioned content, the system ID, the record permission code and the time limitation information satisfy the above-mentioned relationship, and the present time information  
 15 outputted from the clock circuit 1527 satisfies the condition of the time limitation information. In this case, when the above-mentioned encrypted content are an image signal, the descrambled image signal is outputted from the first cipher decoder 1513 to the television set 1530, and then the user can  
 20 watch an image of the image signal and listen to an audio signal corresponding to the image signal. In this case, the decrypting process of the first cipher decoder 1513 is expressed by the following equation:

$$\begin{aligned} C [FK] \# (K * T * DID * TIME * COPY) \\ 25 \quad = C [FK] \# FK \end{aligned}$$

$$= C \quad (5).$$

When the record permission code permits only watching and listening, the content data can be recorded on the optical disk 1101, however, when both of watching and listening, and  
5 recording are permitted, the content data can be recorded on the optical disk 1101. Therefore, this method will be described as follows.

The BCA reproducing circuit 1521 of the optical disk recording and reproducing apparatus 1514 reproduces the data  
10 of the BCA 1104 of the optical disk 1101 to obtain the disk ID signal 1515, and outputs the disk ID signal to the second cipher encoder 1516 of the CATV decoder 1506. The second cipher encoder 1516 of the CATV decoder 1506 encrypts the data of the content outputted from the first cipher decoder 1513, using the  
15 disk ID signal 1515 as the second cipher key to generate a second encrypted content 1517, and outputs the generated second encrypted content 1517 to the recording circuit 1518 of the optical disk recording and reproducing apparatus 1514. It is to be noted that the above-mentioned encrypting of the second  
20 cipher decoder 1516 is limited to the time when the first encrypted content is decrypted and outputted from the first cipher decoder 1513. The content which is the output signal from the first cipher decoder 1513 is denoted by C, the disk ID signal 1515 which is the second cipher key is denoted by BCAS,  
25 and the second encrypted content 1517 is denoted by C[BCAS],

then the following equation can be represented:

$$C * BCAS = C [BCAS] \quad (6).$$

The second encrypted content 1517 sent to the recording circuit 1518 of the optical disk recording and reproducing apparatus 1514 is modulated using, for example, a well known 8/16 modulation system to the recording circuit 1518, and then, the modulated signal is recorded in the user data area 1103 on the optical disk 1101 by the optical pickup (not shown). When the above-mentioned content encrypted and recorded on the optical disk 1101 is reproduced, the laser beam outputted from the optical pickup is irradiated onto an area where the above-mentioned encrypted content is recorded on the optical disk 1101, so that the reflected light enters the optical pickup. The above-mentioned optical pickup photoelectrically converts the entered reflected light into a reproduced electric signal, and then, the reproduced signal which has been photoelectrically converted is outputted to the data reproducing section 1519. The data reproducing section 1519 A/D converts the inputted reproduced signal into a digital reproduced signal, and then, the digital reproduced signal is outputted the second cipher decoder 1520.

On the other hand, a laser beam outputted from the optical pickup is irradiated onto the BCA 1104 of the optical disk 1101, so that the reflected light enters the optical pickup. The above-mentioned optical pickup photoelectrically converts

the inputted reflected light into a reproduced electric signal, and then, the reproduced signal which has been photoelectrically converted is outputted to the BCA reproducing circuit 1521. The BCA reproducing circuit 1521 generates the disk ID signal 1515 based on the inputted reproduced signal, and the generated disk ID signal is outputted to the second cipher decoder 1520. In response to the disk ID signal, the second cipher decoder 1520 decrypts the reproduced encrypted content from the data reproducing section 1519, using the inputted disk ID signal 1515 as a key. At that time, in the case that the content is regularly recorded on the optical disk 1101, the key for decrypting the encrypted content recorded on the optical disk 1101 is the disk ID of the optical disk 1101, and the disk ID signal outputted from the BCA reproducing circuit 1521 is also the disk ID signal (BCAS) of the optical disk 1101, and therefore, the second cipher decoder 1520 can normally carry out the decrypting process. Accordingly, the data of the content decrypted or descrambled are outputted from the second cipher decoder 1520 as an output signal 1525. In this case, the decrypting process of the second cipher decoder 1520 can be expressed in the following equation. When the data content is an image signal, the second cipher decoder 1520 expands, for example, an MPEG signal to reproduce an original image signal, and then, outputs the image signal.

$$C \text{ [BCAS]} \# \text{ BCAS} = C \quad (7)$$

The above-mentioned optical disk 1101 is encrypted using only the disk ID signal (BCAS) 1515, and therefore, it is possible to reproduce content data by an arbitrary optical disk recording and reproducing apparatus comprising a BCA reproducing circuit 1521 and the second cipher decoder 1520. Although the encryption encoders 1504 and 1516 perform encryption and the encryption decoders 1513 and 1520 perform decryption in the above description, encrypting and decrypting may be performed by such a configuration that programs for encryption algorithms and decryption algorithms are included in the program carried out by the CPU which is the control section within each of the apparatuses 1501, 1506 and 1514.

Although, in the present preferred embodiment, the second cipher encoder 1516 of the CATV decoder 1506 encrypts the content using the disk ID signal 1515 as the second cipher key, the content may be encrypted as follows. For example, the IC card 1522 prepared for each CATV company apparatus 1501 may be mounted on the CATV decoder 1506, and the company identification signal recorded within the company identification signal memory 1523 of the IC card 1522 and the disk ID signal (BCAS) reproduced by the BCA reproducing circuit 1521 may be combined to be used as the second cipher key for encrypting the content by the second cipher encoder 1516. The content of the output signal from the first cipher decoder 1513 is denoted by C, the disk ID signal 1515 which is the first second

cipher key is denoted by BCAS, the company identification signal 1523 which is the second cipher key is denoted by CK, and the second encrypted content 1517 is denoted by  $C[BCAS, CK]$ . Then, the encrypting process of the second cipher encoder 1516 is  
5 expressed by the following equation:

$$C * BCAS * CK = C [BCAS, CK] \quad (8).$$

Next, when the content encrypted and recorded on the optical disk 1101 is reproduced, a laser beam outputted from the optical pickup is irradiated onto an area in which the above  
10 encrypted content has been recorded on the optical disk 1101, so that the reflected light enters the optical pickup. The optical pickup photoelectrically converts the entered reflected light to a reproduced signal, which is then outputted to the data reproducing section 1519. The data reproducing  
15 section 1519 A/D converts the inputted reproduced signal into a digital reproduced signal, which is then outputted to the second cipher decoder 1520. On the other hand, a laser beam outputted from the optical pickup is irradiated onto the BCA 1104 of the optical disk 1101 so that the reflected light enters  
20 the optical pickup. The optical pickup photoelectrically converts the entered reflected light into a reproduced signal, which is outputted to the BCA reproducing circuit 1521. The BCA reproducing circuit 1521 reproduces the disk ID signal 1515 based on the inputted reproduced signal, and then, the disk ID  
25 signal 1515 is outputted to the second cipher encoder 1516 and

the second cipher decoder 1520.

In addition, the company identification signal stored in the company identification signal memory 1526 of the IC card 1524 mounted on the optical disk recording and  
5 reproducing apparatus 1514 is inputted to the second cipher decoder 1520. The company identification signal may not be recorded within the company identification signal memory 1526 of the IC card 1524, for example, upon installation of a recording program of the optical disk recording and reproducing  
10 apparatus 1514, the company identification signal may be recorded in a memory (not shown) connected to a CPU of a control section of the optical disk recording and reproducing apparatus 1514. Alternatively, the company identification signal may be inputted using a keyboard (not shown) of the optical disk  
15 recording and reproducing apparatus 1514.

The second cipher decoder 1520 decrypts the encrypted content using the inputted disk ID signal 1515 and the company identification signal as decipher keys. At this time, in the case that the user of the CATV decoder 1506 contracts formally  
20 with a particular CATV company having the CATV company apparatus 1502, and the content 1502 is regularly recorded on the optical disk 1101, the first decipher key for the encrypted content encrypted and recorded on the optical disk 1101 is just the disk ID signal (BCAS) of the optical disk 1101 which will be  
25 reproduced exactly at that moment, and the second cipher key



is the company identification signal (CK) stored in the company identification signal memory 1526 of the IC card 1524 supplied from the contracted CATV company. Accordingly the outputted signal 1525 of the decoded or descrambled contents is outputted  
5 from the second cipher decoder 1520. In this case, the decrypting process of the second cipher decoder 1520 is expressed in the following equation. When the content is an image signal, for example, an MPEG signal is extended by the second cipher decoder 1520, and then, an output signal 1525 of  
10 the image signal is outputted.

$$C [BCAS, CK] \# (BCAS * CK) = C \quad (9)$$

Since the content of the above optical disk 1101 is encrypted using the disk ID signal 1515 and the company identification signal, it is possible to carry out reproduction  
15 by an arbitrary optical disk recording and reproducing apparatus comprising the BCA reproducing circuit 1521 and the second cipher decoder 1520 if the contract is made with the CATV company which supplies the above-mentioned content. On the contrary, if the contract is not made with above-mentioned CATV  
20 company, the company identification signal cannot be obtained, and the content cannot be reproduced, then this makes it possible to distinguish the contracted user from non-contracted user.

Also, since in the present preferred embodiment each user sends a disk ID signal from the optical disk recording and  
25 reproducing apparatus 1514 to the CATV decoder 1506 located at

their own home to encrypt image data or the like, it is not necessary for the CATV apparatus 1501 to change encrypted content individually delivered to each user, therefore, the system for broadcasting can be simplified to supply the same content to a mass audience at low cost. In addition, according to the present preferred embodiment, recording on only one RAM-type optical disk can be permitted for each user having the CATV decoder 1506.

Although, in the present preferred embodiment, the case where the content is broadcasted from a head end of the cable television system is described, the present invention is not limited to this, the present invention can be applied to broadcasting using radio wave.

#### FIFTH PREFERRED EMBODIMENT

A method for recording and reproducing encrypted content of a fifth preferred embodiment according to the present invention will be described in reference to the drawings. Fig. 21 shows a plan view illustrating a data recording area of an optical disk 1601 of the fifth preferred embodiment according to the present invention, and Fig. 22 is a block diagram showing a configuration of an optical disk recording and reproducing system according to the fifth preferred embodiment. In the fifth preferred embodiment, the description for the common elements with the third and the fourth preferred embodiments are omitted in the following description.

Referring to Fig. 21, 1601 denotes a recording-type optical disk which is either a rewritable type or non-rewritable type of optical disk, 1602 denotes a control user data area in which disk information is recorded in a form of concavo-convex pits, 1603 denotes a user data area into which the user record  
5 the data by irradiating a light beam from a laser onto the optical disk, and 1604 denotes an BCA in which a disk ID is recorded.

In the BCA 1604, a plurality of trimming areas 1606 having an elongated shape in the radius direction are formed  
10 by partially trimming a recording film on concavo-convex pits in the inner peripheral section of the control user data area 1602 using a pulse laser such a YAG laser or the like. The trimming is carried out by the disk manufacturer. Also, by adding the disk ID to the data recorded in the BCA 1604, the  
15 management of the optical disk can be easily implemented. In addition, by recording the data of the BCA 1604 on the concavo-convex pits, the information for identifying the optical disk which is recorded in the BCA 1604 can be prevented from easily being falsified.

20 In addition, by arranging the control user data area 1602 and the BCA 1604 so as to be adjacent from each other, the data of the BCA 1604 can be reproduced continuously when the data of the control user data area are reproduced or the data of the control user data area can be reproduced continuously  
25 when the data of the BCA 1604 are reproduced, therefore, it

becomes possible to accelerate the process for obtaining or acquiring information of the BCA 1604 so as to identify the optical disk quickly by the CPU, for example, when the optical disk is started up and for recording the encrypted contents.

5           Although the BCA 1604 of the present preferred embodiment is formed by trimming the recording film on the concavo-convex pits in the inner periphery section of the control user data area 1602, the recording film which constitutes an optical disk of recording type which is either  
10 a rewritable type or non-rewritable-type of optical disk is easily affected by heat, as compared with the reflecting film formed on a read-only optical disk. By trimming the inner periphery section of the control user data area 1602, the recording data of the user data area 1603 can be protected from  
15 the heat generated upon trimming as compared with that when the outer periphery section is trimmed. The reason why the BCA 1604 is formed on the inner peripheral side of the control user data area 1602 is that a margin is taken into consideration, when the diameter of the beam spot from a laser beam fluctuates due  
20 to instability of a focusing servo circuit of a laser device. The data recorded in the BCA 1604 before trimming may be recorded in the control user data area 1602. The data recorded in the BCA 1604 can be recorded in the control user data area 1602 so that the above-mentioned data of the control user data area 1602  
25 can be protected upon trimming.

In addition, when the above-mentioned data is recorded continuously and repetitively from the BCA 1604 to the control user data area 1602, the position of the BCA 1604 can be predicted by finding out the above-mentioned data in the control user data area 1602. Also, the data in the key information recording area 1605 is recorded by irradiating a light beam in the same way as that of the user data area 1603.

In a manner similar to that of the present preferred embodiment, by arranging the control user data area 1602 and the key information recording area 1605 so as to be adjacent from each other, the data in the key information recording area 1605 can be reproduced continuously when the data of the control user data area 1602 are reproduced or the data of the control user data area 1602 can be reproduced continuously when the data of the key information recording area 1605 are reproduced, therefore, it becomes possible to accelerate the process for obtaining the information of the BCA 1604 to identify the optical disk quickly by a CPU when, for example, the optical disk is started up and for reproducing the encrypted content.

Referring to Fig. 22, the optical disk recording and reproducing system according to the fifth preferred embodiment comprises a CATV company apparatus 1701, a key issuing center apparatus 1707, a CATV decoder 1706, an optical disk recording and reproducing apparatus 1714, and a television set 1730. In this case, the CATV company apparatus 1701 comprises a content

memory 1702 for storing the content such as movie software, a first cipher key memory 1703 for storing a first cipher key and a first cipher encoder 1704. Also, the CATV decoder 1706 comprises a system ID memory 1708, a first cipher decoder 1713, and a clock circuit 1725 for outputting the present time information. Further, the key issuing center apparatus 1707 comprises a control section 1707a for controlling the operation of the apparatus 1707 and a time limiting information memory 1710. Further, the optical disk recording and reproducing apparatus 1714 comprises a recording circuit 1717, a key information recording circuit 1719, a BCA reproducing circuit 1720, a data reproducing section 1721, a second cipher decoder 1722 and a key information reproducing section 1723.

First of all, the first cipher encoder 1704 of the CATV apparatus 1701 encrypts data of content such as movie software which is stored in the content memory 1702, using the first cipher key 1703, so as to generate a first encrypted content 1705, and transmits the generated first encrypted content 1705 to the first cipher decoder 1713 of the CATV decoder 1706 of each user through the network. The content stored in the content memory 1702 is denoted by C, the first cipher key stored in the first cipher key memory 1703 is denoted by FK, and the first encrypted content 1705 is denoted by C[FK], then, the following equation can be represented:

$$C * FK = C [FK] \quad (10).$$

The CATV decoder 1706 transmits to the control section 1707a of the key issuing center apparatus 1707 via the network, a system ID stored in the system ID memory 1708 of the CATV decoder 1706, and a title code 1709 of the above-mentioned content which user wishes to watch and listen to where the title code 1709 is inputted by using, for example, a keyboard (not shown). The above-mentioned title code may be inputted by selecting according to the screen of the television set 1730, may be inputted directly using the keyboard or may be inputted from the remote controller or the like. Accordingly, the title code may be obtained by a user in his way, may be sent from the CATV decoder 1706 together with the first encrypted content or may be sent in advance at different time from that of the first encrypted content in a form of program guidance or the like.

Based on the system ID of the CATV decoder 1706 and the title code of the above-mentioned content, the control section 1707a of the key issuing center apparatus 1707 generates the corresponding key (K) 1712 in reference to the corresponding time limitation information stored in the time limitation information memory 1710, and then, transmits the generated key (K) 1712 to the first cipher decoder 1713 of the CATV decoder 1706 via a network. The time limitation information makes it possible to distinguish among the cases where the same content is broadcasted a plurality of times at different times. The first decipher key is denoted by FK, the system ID of the CATV

decoder 1706 is denoted DID, the time limitation information is denoted by TIME, and the title code of the content is denoted by T, the key (K) 1712 satisfies the relationship represented by the following equation:

$$5 \quad FK = K * T * DID * TIME \quad (11).$$

The first cipher decoder 1713 can decrypt the first encrypted content 1705 if the first decipher key (FK), the above key (K) 1712 transmitted from the key issuing center apparatus 1701, the title code of the above-mentioned content, the system  
 10 ID, and the time limitation information satisfy the above-mentioned relationship and the time limitation information satisfies the condition of the present time information from the clock circuit 1725. In this case, when the first encrypted content 1705 is an image signal, the descrambled image signal  
 15 is outputted to the television set 1730 from the first decipher decoder 1713, so that the user can watch and listen to the content on the television set 1730. In this case, the decrypting process of the first cipher decoder 1713 is expressed as follows:

$$\begin{aligned} & C [FK] \# (K * T * DID * TIME) \\ 20 \quad & = C [FK] \# FK \\ & = C \quad (12) \end{aligned}$$

Next, the method for recording the above-mentioned content on the optical disk 1601 will be described. When the content is recorded on the optical disk 1601, the first encrypted  
 25 content 1705 which has not been decrypted by the CATV decoder



1706 is transmitted to the recording circuit 1717 of the optical disk recording and reproducing apparatus 1714 from the first cipher encoder 1704 of the CATV company apparatus 1701. The recording circuit 1717 digitally modulates data of the received  
5 first encrypted content 1705 by using a modulation system such as a well known 8/16 modulation system, and the modulated digital data are recorded on the optical disk 1601 by the optical pickup (not shown). Accordingly, it is necessary for the first encrypted content 1705 to be decrypted in order to reproduce  
10 the above-mentioned content encrypted and recorded on the optical disk 1601.

The optical disk recording and the reproducing apparatus 1714 transmits to the control section 1707a of the key issuing center apparatus 1707 via the network, the disk ID  
15 signal 1715 of the optical disk 1601 reproduced by the BCA reproducing circuit 1720 and the title code 1716 of the above-mentioned content, which is inputted using, for example, a keyboard (not shown) and which the user wishes to reproduce. As to the timing for sending the disk ID, the disk ID may be  
20 sent when the key issuing center apparatus 1707 is accessed or the disk ID may be sent together with the title code when listening and watching the content.

Although as a method for transmitting the disk ID, a method for sending the output signal from the BCA reproducing  
25 circuit 1720 directly to the key issuing center apparatus 1707

by reproducing the BCA 1604 of the optical disk 1601 as shown in Fig. 22 is disclosed above, the present invention is not limited to this, the following method may be used. For example, the data of the BCA 1604 is reproduced before access to the key issuing center apparatus 1707 when starting up the disk, and the data of the BCA 1604 is stored in a memory (not shown) of the optical disk recording and reproducing apparatus 1714 or the CATV decoder 1706, then, it is transmitted to the control section 1707a of the key issuing center apparatus 1707 at the above-mentioned timing. In addition, when the disk ID can be recognized visually in some form such as a label, a keyboard may be used for inputting the disk ID. When the label is a bar code, a bar code reader may be used for reading out the disk ID.

The control section 1707a of the key issuing center apparatus 1707 generates a key (DK) 1718 corresponding to the disk ID signal 1715 of the optical disk 1601 and the title code 1716 of the content, and transmits the generated key (DK) 1718 to the key information recording circuit 1719 of the optical disk recording and reproducing apparatus 1714. In this case, the first decipher key is denoted by FK, the disk ID signal 1715 of the optical disk 1601 is denoted by BCAS, and the title code 1716 of the content is denoted by T, the key (DK) satisfies the relationship of the following equation:

$$FK = DK * BCA * T \quad (13).$$

The key (DK) inputted into the key information recording circuit 1719 of the optical disk recording and reproducing apparatus 1714 is digitally modulated using a modulating system such as the well known 8/16 modulation system or the like, and then, the modulated digital data is recorded in the key information recording area 1605 on the optical disk 1601 by the optical pickup (not shown). The key (DK) may be recorded a plurality of times in the key information recording area 1605. By recording the same key a plurality of times, the key (DK) can be protected when the recording film of the key information recording area 1605 deteriorates or when the optical disk 1601 gets scratched, so that the content can be decrypted only when the data of either one of the keys (DK) can be reproduced.

Although in the present preferred embodiment, the key information recording area 1605 is provided on the inner peripheral side of the user data area 1603, it may be provided on the outer peripheral side of the user data area 1603 or may be provided both on the inner periphery and the outer peripheral sides. By providing the key information recording area 1605 on the outer peripheral side, it becomes possible to record more keys (DK). Also, by dispersedly providing a plurality of key information recording areas, the key (DK) can be protected by the other key information recording areas even in the case that one key information recording area cannot be reproduced.

On the other hand, a laser beam outputted from the optical pickup is irradiated onto the area of the optical disk 1601 on which the above content is recorded so that the reflected light enters into the optical pickup. The optical pickup  
5 photoelectrically converts the entered reflected light into a reproduced electric signal, and the reproduced signal which has been photoelectrically converted is outputted to the data reproducing section 1721. In response to this, the data reproducing section 1721 A/D converts the inputted reproduced  
10 signal into encrypted digital data, which is outputted to the second cipher decoder 1722. In addition, a laser beam outputted from the optical pickup is irradiated onto the BCA 604 of the optical disk 1601, and then, the reflected light enters the optical pickup. The optical pickup photoelectrically converts  
15 the inputted reflected light into a reproduced electric signal, and the reproduced signal which has been photoelectrically converted is outputted to the BCA reproducing circuit 1720. In response to this, the BCA reproducing circuit 1720 reproduces the disk ID signal 1715 based on the inputted reproduced signal,  
20 which is outputted to the encryption decoder 1722. In addition, a laser beam outputted from the optical pickup is irradiated onto the key information recording area 1605 of the optical disk 1601 so that the reflected light enters the optical pickup. The optical pickup photoelectrically converts the entered  
25 reflected light into a reproduced electric signal, and outputs

the reproduced signal to the key information reproducing section 1723. In response to this, the key information reproducing section 1723 generates data of a key (DK) based on the inputted reproduced signal, which is outputted to the second  
 5 cipher decoder 1722.

When the content is reproduced immediately after access to the key issuing center apparatus 1707, the key information recording circuit 1719 may directly input the key (DK) to the second cipher decoder 1722 before recording the same  
 10 key (DK) in the key information recording area 1605. By doing this, the time until the reproduction is started can be shortened. The cipher decoder 1722 decrypts the encrypted content using the decipher key including the inputted disk ID signal 1715, the key (DK) and the title code 1716 of the above content. The  
 15 decrypting process of the second cipher decoder 1722 is expressed in the following equation. When the content is an image signal, an MPEG signal is, for example, expanded so that an output signal 1724 of the image signal is outputted from the second cipher decoder 1722.

$$\begin{aligned}
 20 \quad C [FK] \# (DK * BCA * T) \\
 &= C [FK] \# FK \\
 &= C \qquad \qquad \qquad (14)
 \end{aligned}$$

In the present preferred embodiment, when a user fee is imposed when the key signal is received from the control  
 25 section 1707a of the key issuing center apparatus 1707, a fee

is separately imposed when listening and watching the content, and the content recorded on the optical disk 1601 is reproduced for the first time, which avoids the fee imposition only upon recording the content data on the optical disk 1601.

5 Accordingly, it becomes possible to lower the imposed fee,  
(a) for the users who wish to listen and watch content, but do not need to record content data on the optical disk 1601, or

(b) for the users who wish to record content data  
10 on the optical disk 1601, but do not need to listen and watch content upon broadcasting,

as compared with the case in which a fee is imposed once for both listening or watching and recording on the optical disk 1601.

15 Also, since a fee is not imposed for only recording on the optical disk 1601, the user can determine whether or not the user receives the key for reproducing the optical disk 1601 to listen and watch again after listening and watching.

Although, in the above-mentioned preferred embodiment, a method  
20 for receiving the key (DK) from the control section 1701a of the key issuing center apparatus 1707 via the network is used, the present invention is not limited to this, the title and the disk ID number of the content may be orally conveyed on the phone or the like, and be inputted using a keyboard after being  
25 received orally.

Next, the case will be described where the optical disk 1601, on which the key (DK) is recorded in the key information recording area 1605, is reproduced after access to the key issuing center apparatus 1707 is completed. First of all, a laser beam outputted from the optical pickup is irradiated onto the area of the optical disk 1601 where the above-mentioned content is recorded, and then, the reflected light is inputted to the data reproducing section 1721 via the optical pickup which carries out the photoelectric conversion. In response to this, the data reproducing section 1721 outputs the data of the encrypted content to the second cipher decoder 1722. On the other hand, a laser beam outputted from the optical pickup is irradiated onto the BCA 1604 of the optical disk 1601 so that the reflected light is inputted into the BCA reproducing circuit 1720 via the optical pickup which carries out the photoelectric conversion. In response to this, the BCA reproducing circuit 1720 generates the disk ID signal 1715 based on the inputted reproduced signal, which is outputted to the second cipher decoder 1722.

In addition, the laser beam outputted from the optical pickup is irradiated onto the key information recording area 1605 of the optical disk 1601 so that the reflected light is inputted into the key information reproducing section 1723 via the optical pickup which carries out the photoelectric conversion. In response to this, the key information

reproducing section 1723 generates data of the key (DK) based on the inputted reproduced signal, which is outputted to the second cipher decoder 1722. The second cipher decoder 1722 decrypts the encrypted content outputted from the data

5 reproducing section 1721, using the decipher key including the inputted disk ID signal 1715, the key (DK) and the title code 1716 of the above-mentioned content. The decoding process of the second cipher decoder 1722 is expressed in the following equation. When the content is an image signal, an MPEG signal  
10 is, for example, expanded, and the image signal of the expanded MPEG signal is outputted from the second cipher decoder 1722.

$$\begin{aligned} C [FK] \# (DK * BCA * T) \\ = C [FK] \# FK \\ = C \end{aligned} \quad (15)$$

15 By recording the data of the key (DK) once in the key information recording area 1605, the above-mentioned encrypted content can always be reproduced without any access to the key issuing center apparatus 1707. Also, since all of the decipher keys required for the decrypting process are  
20 recorded on the optical disk 1601, the above-mentioned optical disk 1601 can be reproduced by an arbitrary optical disk recording and reproducing apparatus comprising the BCA reproducing circuit 1720, the key information reproducing section 1723 and the second cipher decoder 1722.

25 In addition, in the case that the above-mentioned



encrypted content is attempted to be reproduced after being copied onto the optical disk 1601 with a different disk ID, a disk ID signal different from that of the above-mentioned optical disk 1601 is outputted from the BCA reproducing circuit 5 1720, therefore, the encrypted content cannot be decrypted, and this prevents the content from being reproduced after being copied. Even in this case, however, by conveying the title and the disk ID of the content to the key issuing center through the network or orally, the decipher key may be received after 10 the fee is imposed. In this way, even if the encrypted content is copied onto another optical disk 1601, any content cannot be reproduced irregularly, and a fee is always imposed when the optical disk 1601 on which the encrypted content is copied, is reproduced, and this leads to protection of copyright for the 15 content.

Fig. 23 shows a table showing a configuration of the table with IDs according to the fifth preferred embodiment, which shows keys (K) inputted into the first cipher decoder 1713 and keys (DK) inputted into the key information recording 20 circuit 1719 in a rearranged form, for different system IDs and different disk IDs.

Referring to Fig. 23, T1, T2 and T3 denote title codes for different contents, and FK1, FK2 and FK3 denote decipher keys for decoding encrypted contents having the title codes of 25 T1, T2 and T3, respectively. DID1, DID2 and DID3 denote system

IDs for different CATV decoders 1706, and BCAS1, BCAS2 and BCAS3 denote disk IDs for different optical disks 1601. In this case, keys (Kmn) inputted into the CATV decoder 1706 are determined so as to satisfy the following equation:

5           
$$FKn = Kmn * Tn * DID * TIMEn \quad (16).$$

Also, the keys (DKmn) inputted to the optical disk recording and reproducing apparatus 1714 are determined so as to satisfy the following equation:

$$FKn = DKmn * BCAm * Tn \quad (17).$$

10           As shown in Fig. 23, not only in the case of different content but also in the case of the same content, the key information acquired from the key issuing center apparatus 1707 for each different CATV decoder 1706, for each different optical disk and for each different broadcasting time is set so as to  
15 be different from each other, and then, this leads to protection of copyright in detail. In the same way, since the key information differs when the system IDs, disk IDs and time information are different from the others even for the same content, it is not necessary for the CATV company apparatus 1701  
20 to change the encrypted content for each user, therefore, one encrypted content may be prepared for one content. Therefore, the system for broadcasting can be simplified, and it becomes possible to supply the content to a mass audience at low cost.

Although, in the present preferred embodiment, the  
25 case described where the content is broadcasted from a head end

of the cable television, the present invention can be applied to broadcasting using radio wave.

#### ADVANTAGEOUS EFFECTS OF THIRD TO FIFTH PREFERRED EMBODIMENTS

5           An optical disk according to the present preferred embodiment comprises (a) a first information area for recording first disk information therein, (b) a second information area for recording therein second disk information for identifying individual, and (c) a user data area in which recording  
10 information is possible by irradiating a light beam onto the user data area. Accordingly, by adding the above-mentioned information for identifying optical disks to an optical disk according to a prior art, the management of optical disks can be easily implemented. In this case, the above second  
15 information area is preferably recorded in the above-mentioned first information area, and can be reproduced by the optical pickup for reproducing the above-mentioned first information area. In the above-mentioned second information area, data of the second information is recorded by partially eliminating or  
20 removing the recording film within the above-mentioned first information area so that a plurality of trimming areas having an elongated shape in the radius direction are formed, and this can prevent the above-mentioned second disk information from being easily falsified.

25           According to a method for recording encrypted content

of the present preferred embodiment, when the data of the content is recorded on the user data area of an optical disk comprising (a) a first information area for recording the first disk information therein, (b) a second information area for  
5 recording therein the second disk information for identifying individual disks, and (c) a user data area in which recording information is recorded by irradiating a light beam onto the user data area, the data of the content is encrypted and the encrypted data is recorded so that the data of the content can  
10 be decrypted and reproduced by an operation or calculation using at least the above-mentioned second disk information.

Accordingly, by encrypting the content using the identification information of an optical disk which exists only in one particular optical disk, there is such a specific advantageous  
15 effect that irregular copying of the content can be prevented so as to protect the copyright.

An optical disk according to the present preferred embodiment has a key information recording area for recording therein key information for decrypting encrypted and recorded  
20 content within the user data area. Accordingly, in a system which needs key information for decrypting the encrypted and recorded content, there is such a specific advantageous effect that it is not necessary to input key information every time of reproduction after recording the key information once in the  
25 key information recording area.

Furthermore, according to a method for recording encrypted content of the present preferred embodiment, when the content is recorded in the user data area of an optical disk comprising (a) a first information area for recording the first disk information therein, (b) a second information area for recording therein the second disk information for identifying individual disks, (c) a user data area in which information is recorded by irradiating a light beam onto the user data area, and (d) a key information recording area for recording therein key information for decrypting the data of the encrypted and recorded content within the user data area, the data of the content is encrypted and the encrypted content is recorded so that the data of the content can be decrypted and reproduced by the operation using at least the above-mentioned second disk information and the above-mentioned key information.

Accordingly, even if the data of the encrypted content are copied onto another optical disk, the data thereof cannot be reproduced irregularly, and a fee is always imposed whenever the optical disk on which the data of the encrypted content are copied is reproduced, and this leads to protection of copyright.

In this case, the first disk information is preferably formed in a form of micro concavo-convex pits, and the second disk information for identifying optical disks is recorded on the concavo-convex pits. Therefore, the second disk information can be easily prevented from being falsified.

Moreover, said first disk information and the second disk information are preferably formed to be adjacent from each other. In this case, when the above-mentioned first disk information is reproduced, the second disk information can be reproduced continuously, or when the second disk information is reproduced the first disk information can be reproduced continuously, therefore, it becomes possible to accelerate the process for recording the encrypted content after obtaining or acquiring the second disk information for identifying disks quickly by a CPU when, for example, the optical disk is started up.

According to a method for recording encrypted data of the present preferred embodiment, since key information differs for each different system ID, each disk ID and each time information even with the same content, it is not necessary for the CATV company apparatus 701 to change the encrypted content for each user, and then, the CATV company apparatus 701 may only prepare one encrypted content for one content. This leads to that the system for broadcasting can be simplified, and it becomes possible to supply the content to a mass audience at low cost.

#### MODIFIED PREFERRED EMBODIMENTS OF THIRD AND FIFTH PREFERRED EMBODIMENTS

Although in the above-mentioned third and fifth preferred embodiments, as shown in Figs. 16 and 21, trimming areas 1105 and 1606 are formed in the BCAs 1104 and 1604 located

in the inner periphery section within the control user data areas 1102 and 1602 respectively, the present invention is not limited to this. As shown in Figs. 24 and 25 illustrating the data recording areas of the optical disks 1101a and 1601a according to the modified preferred embodiments of the third and the fifth preferred embodiments respectively, the trimming areas 1105a and 1606a may be formed by trimming the recording film so as to protrude or project into the inner peripheral side of the optical disk from the control user data areas 1102 and 1602. That is to say, the BCAs 1104a and 1604a are not included in the control user data areas 1102 and 1602, respectively, but are formed and allocated so as to protrude or project into the inner side of the control user data areas 1102 and 1602 from the inner peripheral section of the control user data areas 1102 and 1602. In these modified preferred embodiments, the reason why the BCAs 1104a and 1604a are formed in this way is that the margin is taken into consideration where the diameter of the beam spot of the laser beam fluctuates due to the instability of the focusing servo circuit of the laser device. In the present modified preferred embodiment, the user data areas 1103 and 1603 exist outside of the control user data areas 1102 and 1602, therefore, the trimming areas 1105a and 1606a are allocated and formed so as to protect the data recorded in those user data areas 1103 and 1602 from being destroyed.

SIXTH PREFERRED EMBODIMENT

Fig. 26 shows a block diagram illustrating a configuration of a user data area within an optical disk and a configuration of an optical disk reproducing apparatus for decrypting an encrypted content from data in the user data area, according to a sixth preferred embodiment of the present invention. In the present preferred embodiment, the optical disk is, for example, a recording-type optical disk such as a DVD-RAM.

As shown in Fig. 26, a user data area 2150 comprises a sector header area 2101, a main data area 2102, and an error detection code 2103. In the sector header area 2101, a sector address 2104 for indicating a sector position, and copyright control information 2105 for recording the copyright control information (including a scramble flag, copy control information or the like) with respect to the data recorded in the main data area 2102 are recorded. The sector head area 2101 includes a decipher key area 2106 for decrypting encryption information when it has been embedded or encrypted in the data of the main data area 2102. Also, the main data area 2102 are divided into an area in which non-encrypted content 2107 is recorded and an area in which the encrypted content 2108 is recorded, and the non-encrypted content 2107 includes control information for subsequent data such as synchronizing patterns in the MPEG or all types of control information. In addition, the encrypted content 2108 includes content data required for



copyright protection primarily such as AV data or the like which have been encrypted.

The decipher key for reproducing the following main data area 2102 is divided into a plurality of divided decipher keys with a predetermined size (hereinafter referred to as divided decipher keys), which are then registered in the decipher key area 2106. For example, in the case that the decipher key is 8 bytes for one decipher key area of 4 bytes, the decipher key of 8 bytes is divided into two divided decipher keys each of 4 bytes, so that the two divided decipher keys are recorded in decipher key areas 2106 and 2109 of two logically continuous sectors after dividing the decipher key of 8 bytes into divided decipher keys each of 4 bytes. When reproducing data of such a user data area, a plurality of divided decipher keys are acquired from the decipher key areas 2106 and 2109 of the logically continuous plurality of sectors (each sector which is not available due to defects is skipped), and the acquired divided decipher keys of the required number are linked or connected by a data linking device 2111 to obtain the encrypted decipher key required for the reproduction (8 bytes). A decrypting process is carried out for the data recorded in the main data area 2102 of the sector where the encrypted decipher keys (8 bytes) could be obtained by a decrypting device 2114 in accordance with the contents of each unit of copyright control information 2105.

In addition, to further enhance the intensity of the encryption it is possible to encrypt the decipher key, or by adding the decipher key conversion data which is the information in the data to the key so as not to have a constant result of the encryption, it becomes possible to provide different encryption results even for the same cipher key. More concretely, as shown in Fig. 26, the encrypted decipher key outputted from the data linking device 2111 is inputted to the key decrypting device 2112, and then, using a predetermined disk key, the key decrypting device 2112 decrypts the inputted encrypted decipher key into the padding data (1 byte) which are dummy data and the decipher key (7 bytes), which are then outputted to the key converter 2113. In this case, the disk key is acquired by decrypting, for example, an encrypted disk key recorded in the optical disk using a secret key which is a predetermined master key by the disk key decrypting device (not shown). Also, the key converter 2113 converts data of the decipher key conversion data 2110 read out from the main data area 2102 through a predetermined conversion operation such as an operation utilizing multiplication, division or predetermined weighting coefficients by using the decipher key outputted from the above-mentioned key decrypting device 2112, and then, generates and outputs a content decipher key (7 bytes) to the decrypting device 2114. Then, the decrypting device 2114 generates and outputs the data of the decrypted content by

decrypting the data of the content read out from the main data area 2102 using the content decipher key (7 bytes) outputted from the above-mentioned key converter 2113. As the decipher key conversion data 2110, it is preferable to utilize the data  
5 such as data that the irregular usage of the data such as falsifying the copy generation management information or the analog macro-vision control flag can be immediately detected.

Fig. 27 is a block diagram showing an arrangement of the copyright control information and the decipher key in  
10 the user data area and an allocation of the encrypted content in the main data area of an optical disk, according to the sixth preferred embodiment. In an example of the user data area 2150 illustrated in Fig. 27, the decipher key area is arranged so as to be divided into the first decipher key area 2201 having  
15 a division decipher key of 4 bytes and the second decipher key area 2202 having a division decipher key of 4 bytes. Therefore, in spite of the size of the encrypted content recorded in those two sectors, a plurality of sectors (2 sectors in Fig. 27) are utilized. In this case, dummy data is recorded in the unused  
20 area as complementary data. In an example of Fig. 27, complementary data 2203 for one sector is recorded in the case that the encrypted content 2204 exists only for one sector.

Fig. 28 is a block diagram showing an arrangement of the case where the unit of error correction is located over  
25 a plurality of sectors in an optical disk according to the sixth

preferred embodiment. For example, in the case that the optical disk is a DVD, the ability of error correction is enhanced by using a unit block (hereinafter referred to an ECC block) of error correction code of 16 sectors. Therefore, when data  
5 recording or reproducing is carried out, it is necessary to perform the recording process using the ECC block unit. In the case that the decipher key is divided into an arbitrary number of divided decipher keys which are then recorded, the case may be caused where one decipher key is recorded in a plurality of  
10 error correction blocks. When reproducing the same, it is necessary to reproduce all of the plurality of divided decipher keys, therefore, it is also necessary to reproduce not only data in the sector for recording the data of the encrypted content but also data in the ECC block immediately before decipher key  
15 is recorded. An example of Fig. 28 is characterized in that the number of divisions when the decipher key is divided is set as a measure or factor of the number of sectors of the ECC blocks. This leads to that a plurality of divided decipher keys cannot be recorded so as to located over a plurality of ECC blocks.  
20 In addition, as a decipher key used in one ECC block, only one type of decipher key is used, and in the case that the recorded AV data are not sufficient for an ECC block, the data of the sectors which are unnecessary upon reproduction can be prevented from being read out from the optical disk by arranging  
25 complementary data and complementary sectors.

## SEVENTH PREFERRED EMBODIMENT

Fig. 29 is a block diagram showing a configuration of a lead-in area 2401 and a user data area 2402 within an optical disk and a configuration of an optical disk reproducing apparatus for decrypting an encrypted content from data of the lead-in area 2401 and the user data area 2402, according to the seventh preferred embodiment of the present invention.

Referring to Fig. 29, in the same way as in that of the sixth preferred embodiment of Fig. 26, each of the lead-in area 2401 and the user data area 2402 is constructed from sectors having a sector header area 2101, the main data area 2102 and an error detection code 2103. In the sector header area 2101, there are recorded a sector address 2104 for indicating the position of the sector and copyright control information 2105 for recording copyright control information (including a scramble flag, copy control information or the like) with respect to the data recorded in the main data area 2102, and also the sector header area 2101 includes a key index area 2403 for recording a key index for indicating the recording position of the decipher key (that is, the recording position of storing position in a decipher key table 2404 within the main data area 2102) for referring to a decipher key for decrypting in the case that the data of the main data area 2102 are encrypted. The decipher key for decrypting the encrypted content recorded in the user data area 2402 is recorded in a form of a decipher key

table 2404 in the lead-in area 2401 which is rewritable in a form of a table. The decipher key recorded in the lead-in area 2401 is referred to by the key index recorded in the key index area 2403. In the same way as that of the sixth preferred embodiment illustrated in Fig. 26, the decipher key referred to in the above is decrypted into the padding data and the decipher key (or title key) by the key decrypting device 2112 using a predetermined disk key, and thereafter, the above decrypted decipher key (or title key) is converted into a content decipher key by the key converter 2113 using the decipher key conversion data, and then, the converted content decipher key is outputted to the decrypting device 2114. The decrypting device 2114 decrypts the data of the encrypted content by using the content decipher key, and then, generates and outputs data of the decrypted content.

In an optical disk and an optical disk reproducing apparatus according to the seventh preferred embodiment constituted as described above, by recording a key index for reference in the key index area 2403 within the sector header area 2101, it becomes possible to allocate the decipher key size of the decipher key table 2404 independently from the size of the key index area 2403. Also, after allocating the size of the decipher key table 2404, by utilizing a plurality of decipher keys continuously from the decipher key table 2404 indicated by the key index within the key index area 2403, a decipher key

of an arbitrary or free size can be used.

Fig. 30A is a block diagram showing a data configuration of the case where an initial value of a decipher key represents an unrecorded status in the main data area 2102 of the lead-in area 2401 within an optical disk according to the seventh preferred embodiment. Referring to Fig. 30A, as the initial value of the decipher key recorded upon formatting of the optical disk or the like, the data in the unrecorded status 2501 is recorded with an already known fixed value (for example, data such as all zeros) which are not used as a key, thereby to indicate the unrecorded status of the decipher key.

Fig. 30B is a block diagram showing a data configuration of the case where a recorded status is represented with a decipher key status table in the main data area 2102 of the lead-in area 2401 within an optical disk according to the seventh preferred embodiment. Referring to Fig. 30B, in the same way as that of the decipher key illustrated in Fig. 30A, the decipher key status table 2502 in a form of table which can be referenced by an index is arranged in the lead-in area 2401, and the recorded status of the decipher key is described as follows as record status data 2503:

- (1) 0x00: unused;
- (2) 0x01: area reservation;
- (3) 0x03: key recorded; and
- (4) otherwise: reserved.

In this case, 0x indicates a hexadecimal representation of the following symbols or numbers.

Fig. 31 is a block diagram showing an allocation of decipher keys in an optical disk according to the seventh preferred embodiment. In an example of Fig. 31, an allocation of the decipher key area of the disk is devised to enhance the reliability of the decipher keys. Usually, defect management is carried out in the user data area 2602, and therefore, in the case that a write failure occurs, a replacement process for an area to be replaced or the like is carried out. In the lead-in area 2601, however, the defect management as described above is not carried out. Therefore, by occurrence of write-in failure, read-out failure or the like, the decipher key, which is required for producing the AV data, may be converted into an unusable status, and moreover, there may be the case the optical disk itself may be converted into an unusable status. Accordingly, a total plurality of decipher keys are desired to be recorded over a plurality of different ECC blocks. In the case that a plurality of decipher keys is recorded in areas adjacent from each other, all of the entire plurality of decipher keys which has been recorded may not be read out due to scratches or dust. Therefore, as shown in Fig. 31, it is preferable to record in separate positions in a layout, such as the inner peripheral side and the outer peripheral side of the optical disk, respectively, for example, in the lead-in area 2601 and



the lead-out area 2603.

In the preferred embodiment of Fig. 29, the decipher key areas are allocated in the lead-in areas 2401 and 2601. This is because to enhance the safety when access is taking place  
5 from a drive unit of a personal computer or the like, with taking into consideration that the user data area 2602 is an accessible area by a conventional read command or write command. Accordingly, the same advantageous effects can be obtained by allocating these in the user data area 2602.

#### 10 EIGHTH PREFERRED EMBODIMENT

Fig. 32 is a block diagram showing a data configuration when data of an optical disk is managed by a file management system of an eighth preferred embodiment according to the present invention. In an example of Fig. 32, based on  
15 a structure of the file system, a sector address for storing a desired file is managed.

In the structure of a file system prescribed or regulated in the ISO 13346 by the International Standardization Organization, a recording position of a file is managed by using  
20 the information called a file entry in order to utilize a rewritable-type optical disk. As shown in Fig. 32, for example, data of a recording position of a file (1) 2703 is stored as a file entry (1) 2701 within a file management information area 2751, and data of a recording position of a file (2) 2704 is  
25 stored as a file entry (2) 2702. Each file is constituted from

extents 2705 and 2706 for managing a plurality of sector areas which are located so as to continue on the optical disk. The encrypted content as shown in the seventh preferred embodiment is recorded in the main data area 2102 indicated by the file entry on the optical disk, and the decipher key is recorded in the decipher key table 2707 within the lead-in area 2601. In the sector header area 2101 within the user data area 2602 where the encrypted content is recorded, a pointer for indicating a recording position for referring to a decipher key required for decrypting is recorded in the key index area 2708. Although, in the present preferred embodiment, the decipher key is managed and recorded using the file unit, the extent unit, the present invention is not limited to this. The decipher key may be managed and recorded using at least one of either of the file unit or the extent unit.

As described above in the optical disk, managed by the file system, the recording operation of the content required for copyright protection will be described with reference to Fig. 33. Fig. 33 shows a recording process of a content required for copyright protection carried out by a file management system according to the eighth preferred embodiment.

When recording the encrypted content, first of all, in step S2801, the decipher key status table 2502 illustrated in Fig. 30B is read out to check empty areas of the decipher key table 2707. Next, in step S2802, it is determined whether

or not there is any empty area of the decipher key table 2702, and in the case of NO, the recording process of the content is completed by stopping the recording operation in step S2807 because the decipher key for the encrypted content cannot be  
5 recorded. On the other hand, in the case of YES in step S2802, the acquired decipher key (or the title key) is recorded, and in the case that the decipher key cannot be acquired, the decipher key area is reserved. Next, in step S2804, the copyright control information of the recorded content  
10 (including information about whether or not encryption has been performed, information for indicating the type or class of encryption or the like) and the key index to be recorded in the key index area 2708 are set, and thereafter, the content is encrypted in step S2805 and then the encrypted content is  
15 recorded on the optical disk in a file form using the extent unit. In this case, the same copyright control information and key index may be used utilizing the file unit or they may be switched utilizing the extent unit. That is to say, in steps S2804 and S2805, the unit to be processed is at least one of  
20 either the file unit or the extent unit. Finally, in step S2806, based on the information with respect to the recorded content, after the file management information for managing the above-mentioned recorded data is updated, the recording process of the content is completed.

25 Fig. 34 is a flowchart showing a reproducing process

of content carried out by a file management system according to the eighth preferred embodiment. Fig. 34 shows a process for reproducing the content recorded in a form of file from the optical disk by the method shown in Fig. 33.

5               When carrying out a reproducing operation for the file, the key index is acquired for the areas shown by the file entry within the file management information area 2751 in order to find out or know the area in the decipher key table utilized by the reproduced file. More concretely, in step S2901, after  
10 the file entry of the file reproduced from the file management information 2751 is acquired by being read out and reproduced, in step S2902 the value of the key index area is read out, and then reproduced from the sector header area 2102 of the area shown by the file entry to be acquired. In the case that  
15 different ways of encrypting are used are conducted utilizing the extent unit, the key index area in the sector header for each extent is read out. Then, in step S2903, the decipher key is read out, and then reproduced to acquire the decipher key from the decipher key area of the decipher key table 2707  
20 indicated by the acquired key index. In addition, in step S2904, the data of the content within the file is read out and reproduced from an area shown by the file entry, and then, data of the reproduced content is decrypted. In this case, when  
25 reproduction and the decrypting of the file of the content are completed, the reproducing process of the content is completed.

Fig. 35 is a flowchart showing an deleting process of content which is carried out by the file management system according to the eighth preferred embodiment, and Fig. 35 shows an operation for deletion of data of content in a form of file  
5 which has been recorded by the method as shown in Fig. 33.

When the deleting operation of the file is carried out, the key index for the area shown by the file entry is acquired to find out or know the areas of the decipher key table 2707 used by the deleted file. More concretely, in step S3001,  
10 after acquiring the file entry of the deleted file from the file management information within the file management information area 2751, in step S3002 the value of the key index area is acquired from the sector header of an area indicated by the file entry is acquired. In this case, when different ways of  
15 encrypting are conducted utilizing the extent unit, data in the key index area in the sector header for each extent is read out. Then, in step S3003, after the decipher key is open or released (here releasing or opening the decipher key means to delete the decipher key from the table) from the decipher key area of the  
20 decipher key table 2707 indicated by the acquired key index, and in step S3004 the file entry for indicating the write-in position of the deleted file is deleted from the file management information, then, the deleting process of the content is completed. Although in a conventional file system only the file  
25 entry is deleted when the file is deleted, the decipher key

recorded in another area cannot be deleted since the decipher key and the record sector of the encrypted content are recorded in separate areas. In the above-mentioned preferred  
embodiments, prior to deletion of the file entry, the management  
5 of the decipher key on the optical disk is carried out by deleting the decipher key for indicating the key index in the sector header area, from the decipher key table 2707.

#### NINTH PREFERRED EMBODIMENT

Fig. 36 is a block diagram showing a configuration  
10 of an optical disk system of a ninth preferred embodiment according to the present invention, and this optical disk system is a information processing system for recording and reproducing content required for copyright protection for the optical disk 3100. The optical disk system comprises an  
15 encoding apparatus 3101, an optical disk apparatus 3102, a decoding apparatus 3103 and a personal computer 3104.

The encoding apparatus 3101 comprises a content memory 3131 for storing data of content, an encoding circuit 3132 for encoding the above-mentioned data of the content in  
20 a form of MPEG format, a cipher key memory 3133 for storing the cipher key, an encrypting circuit 3134 for encrypting the data of the encoded content utilizing the cipher key and generating and storing the decipher key in the decipher key memory 3111, a decipher key memory 3111 for storing the decipher key, a bus  
25 encryption circuit 3112 for bus-encrypting the decipher key,

and an interface 3124 connected to the interface 3122 of the personal computer 3104 via a PCI bus 3151, where the interface 3124 transmits the data of the encrypted content and the decipher key. Also, the optical disk apparatus 3102 comprises a decipher  
5 key table memory 3113 for storing a plurality of decipher keys therein, a bus encrypting and decrypting circuit 3114, a recording and reproducing circuit 3119 for recording the data onto the optical disk 3100 and for reading out and reproducing the data from the optical disk 3100, and an interface 3120  
10 connected to the interface 3121 of the personal computer 3104 via a SCSI bus 3152, where the interface 3120 carries out processes such as transmission and reception of data or signals as well as signal conversion and protocol conversion. The SCSI bus 3152 may be preferably an ATAPI bus. In this case, bus  
15 encryption and bus decryption mean the cipher process and the decipher process, respectively, used for encrypting a cipher key or a decipher key and transmitting or receiving the same key on the PCI bus 3151 or the SCSI bus 3152.

In addition, the personal computer 3104 comprises  
20 a control section 3130 for controlling the operation of the personal computer 3104, a bus encryption decipher key table memory 3115 for storing a plurality of bus encryption decipher keys therein, a decipher key status table memory 3116 for storing data of a plurality of decipher key statuses (indicating a  
25 recording status or condition of a plurality of decipher key

status, more concretely indicating non-usage or unused, area reservation, key recorded, reserved or the like) corresponding to the above-mentioned plurality of bus encryption decipher keys, an interface 3121 connected to the interface 3120 or the  
5 optical disk apparatus 3102 via the SCSI bus 3152 where the interface 3121 carries out processes such as transmission and reception of the data and the signals as well as signal conversion and protocol conversion, and an interface 3122 connected to the interface 3123 of the decoding apparatus 3103  
10 and the interface 3124 of the encoding apparatus 3101 via the PCI bus 3151 where the interface 3122 carries out processes such as transmission and reception of the data or the signals as well as signal conversion and protocol conversion. In addition, the decoding apparatus 3103 comprises an interface 3123 connected  
15 to the interface 3122 of the personal computer 3104 where the interface 3123 carries out processes such as the transmission and the reception of the data or the signals as well as signal conversion and protocol conversion, a bus decrypting circuit 3117 for bus-decrypting or bus-decoding the encryption decipher  
20 key received by the interface 3123, a decipher key memory 3118 for storing the decipher key therein, and a decryption circuit 3141 for decrypting or coding the data of the encrypted content received by the interface 3123 using the decipher key of the decipher key memory 3118 as well as generating an image signal  
25 or a speech sound signal by carrying out the decoding process



of the MPEG format, where the generated image signal and speech sound signal are outputted to a display apparatus 3105.

In the encoding apparatus 3101 of this optical disk system, the encoding circuit 3132 encodes the data of the content  
5 such as the AV data stored or inputted to the content memory 3131 in a form of MPEG format, and the encrypting circuit 3134 encrypts the data of the above encoded content using the cipher key within the encrypting key memory 3133 which is generated to avoid an irregular usage of the content on a personal computer  
10 3104, and then, and transmits the data of the encoded content to the optical disk apparatus 3102 via the interface 3124 and the personal computer 3104. In this case, the data of the encrypted content is transmitted to the recording and reproducing circuit 3119 via the PCI bus 3151, the interface  
15 3122 and the interface 3121 of the personal computer 3104 and the interface 3120 of the optical disk apparatus 3102 from the interface 3124 of the encoding apparatus 3101. Then the data of the encrypted content is recorded on the optical disk 3100 by the recording and reproducing circuit 3119 of the optical  
20 disk apparatus 3102. Also, the recording and reproducing circuit 3119 of the optical disk apparatus 3102 reproduces the data of the encrypted content recorded on the optical disk 3100, and then, transmits the data of the reproduced encrypted content to the decrypting circuit 3141 via the interface 3120, the  
25 interface 3121 and the interface 3122 of the personal computer

3104 and the interface 3123 of the decoding apparatus 3103. The decrypting circuit 3141 of the decoding apparatus 3103 decrypts the encryption for the data of the encrypted content, and carries out a decoding process of MPEG format, then outputs an image  
5 signal or a speech sound signal of the decoded content to a display apparatus 3105 and a speaker apparatus (not shown), respectively.

The encryption circuit 3134 of the encoding apparatus 3101 carries out the encryption for the data of the encoded  
10 content in a form of MPEG format using the cipher key within the cipher key memory 3133, and at the same time, generates and stores the decipher key required upon reproduction in the decipher key memory 3111. Although it is necessary to record the data of the encoded content and the decipher key on the  
15 optical disk 3100, in the case that the decipher key is handled as plain text on the personal computer 3104, there is such a possibility that the decoding of the data of the encrypted content may become easy by reading out the decipher key from the optical disk 3100. In order to avoid this mutual  
20 authorization is carried out between the encoding apparatus 3101 and the optical disk apparatus 3102 and a bus encryption is carried out using a bus key mutually shared.

That is to say, more concretely, the decipher key stored in the decipher key memory 3111 is encrypted by a bus  
25 encryption circuit 3112 of the encoding apparatus 3101, and

thereafter, the encrypted decipher key is stored in a bus encryption decipher key table memory 3115 of the personal computer 3104 via the interface 3124, the PCI bus 3151 and the interface 3122. On the other hand, in the bus encrypting and  
5 decrypting circuit 3114 of the optical disk apparatus 3102, the decoding of the encrypted decipher key which is reproduced by the recording and reproducing circuit 3119 from the optical disk 3100 is carried out, and thereafter, the decipher key which has been decrypted or decoded is stored in a decipher key table  
10 memory 3113. Also, the bus encrypting and decrypting circuit 3114 receives and bus-decrypts, for example, the updated and bus-encrypted decipher key via the interface 3121, the SCSI bus 3152 and the interface 3120 from the bus encryption decipher key table memory 3115, and stores the bus-decrypted decipher  
15 key in the decipher key table memory 3113. Thereafter, the bus-decrypted decipher key is recorded on the optical disk 3100 by the recording and reproducing circuit 3119.

After the decipher key status table is reproduced from the optical disk 3100 by the recording and reproducing  
20 circuit 3119, the decipher key status table is transferred to and stored in the decipher key status table memory 3116 via the interface 3120, the SCSI bus 3152 and the interface 3121. In addition, the decipher key status table updated by the personal computer 3104 is read out from the decipher key status table  
25 memory 3116, and then, is transferred to the recording and

reproducing circuit 3119 via the interface 3121, the SCSI bus 3152 and the interface 3120. Thereafter, the recording and reproduced circuit 3119 records the received decipher key status table on the optical disk 3100. Accordingly, only the  
5 encrypted decipher key is handled on the personal computer 3104, which is located in the middle, by using the encryption decipher key table 3115 and the decipher key status table memory 3116, and this leads to establishment of more security.

Carrying out a bus-encryption of the decipher key  
10 in the same way between the optical disk apparatus 3102 and the decoding apparatus 3103 leads to establishment of more security. That is to say, the bus decrypting circuit 3117 of the decoding apparatus 3103 bus-decrypts or bus-decodes the encrypted decipher key received from the personal computer 3104 via the  
15 interface 3123, and stores the bus-decrypted decipher key in the decipher key memory 3118. The decrypting circuit 3141 decrypts the data of the encrypted content using the decipher key stored in the decipher key memory 3118.

As shown in the above-mentioned seventh preferred  
20 embodiment, in the case that the decipher key for decrypting the data of the encrypted content on the optical disk 3100 is recorded in a form of table, the decipher key table reproduced by the optical disk apparatus 3102 is bus-encrypted by the bus encrypting and decrypting circuit 3114, and thereafter, the  
25 data of the bus encrypted decipher key table is transferred to

the bus encrypted decipher key table memory 3115 of the personal computer 3104 via the interface 3120, and is stored therein. When the data of the content is recorded, the personal computer 3104 searches by retrieving an empty area of the decipher key table from the decipher key status table recorded in the optical disk 3100 in a form of plain text, and then, the bus encrypted decipher key transferred from the encoding apparatus 3101 is allocated to the searched empty area. In this case, when such an encryption as completing with the decipher key unit as a bus encryption (for example, a block encryption with a unit of decipher key length), it is not necessary to decrypt and re-encrypt the decipher key upon allocation thereof to the decipher key block.

Since the decipher key table and the decipher key status table transferred and stored among the optical disk apparatus 3100, the optical disk apparatus 3102 and the personal computer 3104 are one piece of block data, respectively, they can be called a block data.

In the case when the content is reproduced, only the decipher key required for decrypting of the content desired to be reproduced from the decipher key block reproduced from the optical disk apparatus 3102 is retrieved and taken out from the bus encrypted decipher key table memory 3115, and the taken decipher key is transferred to and stored in the decipher key memory 3118 via the bus decrypting circuit 3117 of the personal

computer 3104 and the decoding apparatus 3103. Then the decrypting circuit 3141 receives encrypted AV data reproduced from the optical disk 3100 by the recording and reproducing circuit 3119 of the optical disk apparatus 3102 via the personal  
5 computer 3104 and the interface 3123, and thereafter, the received encrypted AV data is decrypted using the decipher key within the decipher key memory 3118, and the decrypted data is outputted as an image signal and a speech sound signal. In this case, in a manner similar to that of above described case, when  
10 the content is recorded, it is not necessary to decrypt and re-encrypt the decipher key when the decipher key is taken out from the decipher key block when such an encryption as completing with a unit of decipher key as a bus encryption (for example, a block encryption with a unit of decipher key length).  
15 Furthermore, when the size of the decipher key is enlarged, the expansion of the decipher key area such as allocating a plurality of decipher keys can be carried out easily and safely on the personal computer 3104 without changing any configuration of the optical disk apparatus 3102.

20 TENTH PREFERRED EMBODIMENT

Fig. 37 is a block diagram showing a configuration of a user data area on an optical disk, a configuration of an optical disk recording apparatus for encrypting content and recording encrypted content in the user data area, and a  
25 configuration of an optical reproducing apparatus for

decrypting an encrypted content from data in the user data area,  
according to a tenth preferred embodiment of the present  
invention. This tenth preferred embodiment is characterized  
in that the configuration of the optical disk recording  
5 apparatus is added to that of the sixth preferred embodiment,  
and the configuration thereof will be described in detail.

In the optical disk recording apparatus, in order  
to enhance the intensity of the encryption so as not to have  
a constant encryption result, after obtaining or acquiring a  
10 content decipher key by performing a predetermined key  
conversion on the inputted cipher key such as multiplication,  
division or an operation (calculation), using a predetermined  
weighting coefficient by the key converter 2119 using the  
decipher key conversion data which is the information in the  
15 content, the data of the content is encrypted by using the  
content decipher key

That is to say, when the content is recorded, the  
data of the content and the cipher key for encrypting the data  
of the content are inputted to the optical disk recording  
20 apparatus. In this case, the data of the content are inputted  
to the key converter 2119 and the encrypting device 2120, and  
the cipher key is inputted to the key encrypting device 2118  
and the key converter 2119. The key converter 2119 performs  
an operation or calculation of a predetermined key conversion  
25 on the above-mentioned inputted cipher key, using the first and

the second decipher key conversion data 2115 and 2116, which are respectively part of the information in the content, and then, generates and outputs a content decipher key to the encrypting device 2120. Then the encrypting device 2120  
5 encrypts the data of the above-mentioned inputted content using the above-mentioned content decipher key, and then, records the encrypted content in an AV data recording sector 2152 within the user data area 2150 on the optical disk.

In this case, as the decipher key conversion data  
10 used in the optical disk reproducing apparatus are utilized, the second decipher key conversion data 2116, which is the information in the AV data and which is generally different in a unit of sector, copy generation management information included in the sector in which control information is recorded,  
15 and the first decipher key conversion data 2115 which is copy control information including an analog macro-vision control flag. By utilizing the former second decipher key conversion data, it becomes possible to recover the content decipher key for encrypting the data of the content for each sector by the  
20 key converter 2113 in accordance with the content of the second decipher key conversion data. Also, since the latter first decipher key conversion data is data for which irregular utilization can be easily detected upon falsification, such an advantageous effect can be obtained that it can readily be  
25 possible to prevent the data of the content from being decrypted



when the first decipher key conversion data is falsified. More concretely, the cipher key is converted into a decipher key through a predetermined conversion operation using the data in the reproduction control recording sector for recording reproduction control information used for reproduction control of the AV data as the first decipher key conversion data, and the converted decipher key is used as a content decipher key in the encrypting device 2120. In addition, by performing a predetermined conversion operation or calculation on the cipher key using the two pieces of decipher key conversion data including the first decipher key conversion data, which is data in the reproduction control recording sector, and the second decipher key conversion data, which is a part of non-encrypted content in the sector for recording the encrypted content therein, another content decipher key is calculated which may be used as a content decipher key in the encrypting device 2120.

On the other hand, the key encrypting device 2118 encrypts the above inputted cipher key using a disk key inputted in the same way as that of the optical disk reproducing apparatus, and generates the encrypted decipher key. As compared with the size of this encrypted decipher key, each of the decipher key areas 2106 and 2109 in the sector header area is small, therefore, the data divider 2121 divides the encrypted decipher key into a plurality of divided decipher keys, and then, records the respective divided decipher keys into different decipher key

areas 2106 and 2109. In an example of Fig. 37, the encrypted decipher key is divided into two encrypted divided decipher keys, which are then recorded in the decipher key areas 2106 and 2109 of two continuous sectors. In this case, since the decipher key of a cipher key is encrypted by the key encrypting device 2118, the security intensity of the encryption for the cipher key can be enhanced.

When the content is reproduced, the key converter 2113 performs an operation or calculation of a predetermined key conversion on the decipher key from the key decrypting device 2112, using information of the above-mentioned first decipher key conversion data 2115 and the second decipher key conversion data 2116 to generate the content decipher key, which is then outputted to the decrypting device 2114. Also, the decrypting device 2114 decrypts the data of the encrypted content using this content decipher key to obtain the decrypted content. In this case, the key converter 2113 may perform an operation or calculation of a predetermined key conversion on the decipher key from the key decrypting device 2112 using only the information of the first decipher key conversion data 2115.

#### ELEVENTH PREFERRED EMBODIMENT

Fig. 38 is a block diagram showing a configuration of a user data area on an optical disk, a configuration of an optical disk recording apparatus for encrypting content and recording encrypted content in the user data area, and a

configuration of an optical disk reproducing apparatus for decrypting an encrypted content from the data of the user data area, according to an eleventh preferred embodiment of the present invention. This eleventh preferred embodiment is  
5 characterized in that the configuration of the optical disk recording apparatus is added to that of the seventh preferred embodiment, and the configuration thereof will be described in detail.

Referring to Fig. 38, the optical disk recording  
10 apparatus comprises a key encrypting device 2118 for encrypting a cipher key using a predetermined disk key in the same way as that of the tenth preferred embodiment shown in Fig. 37, a key converter 2119 for operating or calculating a content decipher key through an operation of a predetermined key conversion on  
15 the cipher key by using the first and the second decipher key conversion data 2115 and 2116 in the content, and an encrypting device 2120 for encrypting the content using the above-mentioned content decipher key. In this case, the decipher key outputted from the key encrypting device 2118 is recorded in  
20 the main data area 2102 within the lead-in area 2401. On the other hand, the optical disk reproducing apparatus comprises a key decrypting device 2112, a key converter 2113, and a decrypting device 2114 in the same way as that of the seventh preferred embodiment shown in Fig. 29. In this case, the  
25 decipher key recorded in the main data area 2102 within the

lead-in area 2401 is read out and is inputted to the key decrypting device 2112, which then decrypts the decipher key using a predetermined disk key and outputs the decrypted decipher key to the key converter 2113. Also, the key converter 5 2113 performs an operation or calculation of a predetermined key conversion on the decipher key from the key decrypting device 2112 by using the first and the second decipher key conversion data 2115 and 2116 to calculate the content decipher key, which is outputted to the decrypting device 2114.

10           ADVANTAGEOUS EFFECTS OF SIXTH TO NINTH PREFERRED  
EMBODIMENTS

As described above, an optical disk of recording type according to the present preferred embodiments divides and records the decipher key into decipher keys of the decipher key 15 areas having a predetermined size arranged in the sector header area, or records the decipher key having a variable length in the decipher key area indicated by the key index area arranged in the sector header area, and then, an optical disk of recording type which can utilize a decipher key of an arbitrary or free 20 length regardless of a decipher key area of a size prescribed in the sector header area can be provided. Therefore, in accordance with the copyright protection level for the recorded content, it becomes possible to utilize the encryption using an arbitrary key length.

25           MODIFIED PREFERRED EMBODIMENTS

In the above-mentioned preferred embodiments, the above-mentioned disk identification information is preferably constituted by pre-pits which are non-rewritable, and the above-mentioned disk identification information has preferably a region identifier for representing a region in which the optical disk is used. Also, the above-mentioned disk identification information has preferably a data category identifier representing a type, class or kind of content which is recordable and reproducible on the optical disk. In addition, the above-mentioned disk identification information is, preferably, encrypted using a secret key, and recorded in the disk identification information area upon manufacturing. Furthermore, the above-mentioned disk identification information preferably includes data for representing a type, class or kind of data which is recordable in the data recording and reproducing areas, or a type, class or kind of data which is reproducible from the data recording and reproducing area.

In the above-mentioned preferred embodiments, the above-mentioned optical disk preferably have a sector area for data of content therein, and a descramble area management table for managing the corresponding relationship with the descramble key. The key management information area preferably includes a descramble key area for recording a descramble key encrypted using disk identification information as a key, a key information area having a descramble key status area for

representing a recording status or state of the descramble key,  
a content information area for recording therein key  
information used upon reproduction of the content recorded on  
the disk, and a key index area for recording therein a pointer  
5 for referring to a descramble key required for reproduction of  
the content. In addition, in the sector recording the data of  
the content, there are recorded preferably the data of the above  
content, and a pointer for indicating an area for recording the  
descramble key therein.

10 In the above-mentioned preferred embodiments, a  
reproducing circuit of the disk identification information of  
the optical disk recording and reproducing apparatus preferably  
comprises a circuit for decrypting disk identification  
information which has been encrypted using a secret key. Also,  
15 in the optical disk recording and reproducing apparatus, the  
data encrypted with the disk identification information as a  
key are preferably data of content such as image data and music  
data. In addition, the disk identification information  
preferably represents a type, class or kind of data which is  
20 recordable in the data recording and reproducing area, and the  
reproducing circuit of the disk identification information  
determines whether or not the data is of recordable content by  
the type, class or kind of the above-mentioned data.  
Furthermore, the data which is decrypted using the disk  
25 identification information as a key is preferably data of the

content such as image data or music data. Also, the disk identification information preferably represents a type, class or kind of data which is reproducible from the data recording and reproducing area, and the reproducing circuit determines  
5 whether or not the data is of reproducible content based on the type, class or kind of the above-mentioned data.

In the above-mentioned preferred embodiments, the recording circuit of the content preferably records data of content such as encrypted image data and music data and the  
10 descramble key for decoding or decrypting encryption of the data of the above-mentioned content, in the same sector. Also, the reproducing circuit of the content preferably reproduces data of content such as encrypted image data and music data and the descramble key for decoding or decrypting encryption of the data  
15 of the above-mentioned content from the same sector.

In the above-mentioned preferred embodiment, a circuit or a method for allocating key areas preferably arranges a flag for reserved area in a descramble key status area for representing a recorded status of the descramble key, records  
20 information with respect to a key used upon reproduction of the data of the content, and records a key index for representing a recording area of the descramble key allocated for the data of the content. Also, a circuit or a method for arranging the descramble key preferably reproduces an index of a descramble  
25 key area used in the content from the content information area,

arrange a descramble key into a descramble key area indicated in a key index corresponding to the recorded descramble key, and arrange a flag of recorded information in a descramble key status area indicated in the key index corresponding to the  
5 recorded descramble key.

In the above preferred embodiment, the optical disk reproducing apparatus preferably reproduces disk identification information, searches whether or not content is reproducible, reproduces key management information,  
10 reproduces a sector in which data of content such as image data or music data have been recorded, and acquires a descramble key from the reproduced sector. In addition, preferably, the data of the reproduced content is descrambled by the descramble key, and the descrambled data is outputted.

15 In the above-mentioned preferred embodiments, the method for recording data of content preferably records encrypted content so as to be able to be decoded and reproduced through an operation or calculation using at least the above-mentioned second disk information, when the content is  
20 recorded in the user data area of an optical disk having a first information area for recording first disk information therein, a second information area for recording therein second disk information for identifying individual disks and the user data area for recording information by irradiating a light beam onto  
25 the user data area.



In the above-mentioned preferred embodiments, the method for recording data of content is preferably to encrypt and record information so as to be decoded and reproduced by an operation or calculation using at least the second disk information and the key information, when recording the content in the above-mentioned user data area of the optical disk having a first information area for recording first disk information therein, a second information area for recording therein second disk information for identifying individual disks, a user data area for recording information by irradiating a light beam onto the user data area, and a key information recording area for recording key information for decode or decrypting content encrypted and recorded within the user data area.

In the above-mentioned preferred embodiments, dummy data is recorded in a sector of an optical disk having a decipher key area for recording a plurality of divided decipher keys in a plurality of continuous sectors, preferably in the main data area in which a data size including the AV data is less than  $(\text{main data size}) \times (\text{number of divided decipher keys})$ . Also, in the ECC block, the sector having a decipher key area for recording divided decipher keys divided into a plurality of continuous sectors is recorded  $(\text{ECC block unit}) / (\text{number of divided decipher keys})$  times, and the dummy data is recorded in the main data area in which data size including AV data is less than  $(\text{main data size}) \times (\text{ECC block unit})$ .

In the above-mentioned preferred embodiments, a decipher key for decrypting encryption which has been performed on data including the AV data is preferably divided into a plurality of divided decipher keys with a predetermined size, and the plurality of divided decipher keys are recorded in a plurality of decipher key areas in which decipher key table continues. Also, the above-mentioned decipher key table is preferably recorded in the main data area within the rewritable lead-in area. In addition, information for representing a the recording status or state of the decipher key table is preferably recorded in each decipher key area of the decipher key table as a fixed value. Furthermore, the decipher key table is recorded a plurality of times in the above-mentioned different ECC blocks arranged in the inner and the outer peripheries of the optical disk.

In the above-mentioned preferred embodiments, the encoding apparatus 3101 of a data encrypting apparatus, and the optical disk apparatus 3102 of an optical disk recording and reproducing apparatus, preferably share the bus key in a mutual authorization system. Also, the decoding apparatus 3103 of a data decoding apparatus, and an optical disk apparatus 3102 of an optical disk recording and reproducing apparatus, preferably, share the bus key in a cross authenticating system.

Although, in the above-mentioned preferred embodiment, an optical disk of recording type which can record

data, and which is either write-once type or rewritable type including a RAM type or non-rewritable optical disk, is described, the present invention is not limited to this. The present invention can be applied for read-only type optical disk  
5 which can read out and reproduce the previously recorded data but can not newly record data. In the case of a read-only type optical disk, the data recording and reproducing area can be replaced with the data reproducing area which reads out and reproduces the data, and the data of the content or the data  
10 of other various control information is previously recorded upon manufacturing. In this case, the optical disk of recording type includes CD-R, CD-RW, MO, MD, DVD-RAM and so forth. The read-only type optical disk includes music CD, CD-ROM, DVD-ROM and so forth.

#### 15 INDUSTRIAL APPLICABILITY

As described above in detail, according to an optical disk of the present invention, disk identification information using which recording operation and reproducing operation are performed for each optical disk is recorded in a produce-only  
20 area which is non-rewritable, the recording operation and the reproduction operation of the content onto or from the optical disk can be controlled by the user, utilizing the information recorded upon manufacture of the optical disk.

Also, according to an optical disk of the present  
25 invention, data, which has been encrypted using the read-only

disk identification information which is impossible to be rewritten, as a key, is recorded in the user data area of the optical disk, and therefore, even in the case that the user data area is copied onto another optical disk of recording type by the user, the disk identification information can not be copied so that correct decryption and reproduction of the data becomes impossible.

In addition, according to an optical disk of the present invention, encrypted data and a descramble key for decrypting encryption are recorded in sector areas different from each other, and it becomes possible to acquire data such as movies and music required for copyright protection and to acquire a descramble key for descrambling encryption independently. Moreover, by encrypting and recording the descramble key using the disk identification information as a key, the disk identification information can not be copied, which makes it impossible to correctly record and reproduce the data even if the user data area is copied onto another optical disk of recording type by the user. By acquiring and recording the descramble key which has been encrypted using the disk identification information of the optical disk onto which the data are copied as a key, this makes it possible to correctly record and reproduce the data.

Moreover, an optical disk according to the present invention comprises a first information area for recording a

first disk information therein, a second information area for recording a second disk information for identifying individual disks, and a user data area for recording information by irradiating a light beam onto the user data area. Accordingly, by adding information for identifying the above-mentioned optical disk to an optical disk according to the prior art, the management of optical disks can easily be implemented. In this case, the above-mentioned second information area is preferably recorded in the above-mentioned first information area, and data of the second information area can be reproduced by an optical pick up for reproducing the above-mentioned first information area. Also, the above-mentioned second information area is recorded by partially eliminating or removing a recording film within the above-mentioned first information area, so that a plurality of trimming areas having an elongated shape in the radius direction are formed, and this leads to that easy falsification of the above-mentioned second disk information can be prevented.

In addition, according to an optical disk of the present invention, a decipher key is divided into a plurality of divided decipher keys which are then allocated in decipher key areas each having a predetermined size arranged in the sector header area, or a decipher key is recorded in the decipher key areas indicated by a key index area arranged in the sector header area. This leads to that an optical disk of recording

type can be provided which can utilize the decipher key having an arbitrary or free length, independently of the decipher key area having a prescribed size in the sector header area.

Therefore, it becomes possible to use an encryption using an  
5 arbitrary key length in accordance with the level of copyright protection level for recorded content.

Although the present invention has been fully described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted  
10 that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.

## CLAIMS

1. An optical disk of recording type on which data is recordable, including:

a data recording and reproducing area for recording  
5 data therein and reproducing data therefrom; and

a read-only disk identification information area for recording disk identification information for identifying said optical disk therein.

2. The optical disk as claimed in claim 1,  
10 wherein said disk identification information is formed by removing a reflection film formed on the optical disk in a strip shape.

3. The optical disk as claimed in claim 1,  
wherein said disk identification information  
15 includes an inherent disk identifier for each optical disk.

4. The optical disk as claimed in claim 1,  
wherein said data recording and reproducing area includes an area for recording therein encrypted data, which is encrypted using information including said disk  
20 identification information for identifying said optical disk as a key.

5. The optical disk as claimed in claim 4,  
wherein said encrypted data includes content data which is at least one of image data and music data.

25 6. The optical disk as claimed in claim 4 or 5,

wherein said encrypted data includes a descramble key for decrypting a cipher which has been performed on content data.

7. The optical disk as claimed in claim 4 or 5,  
5 wherein said encrypted data includes:

(a) a descramble key for decrypting a cipher which has been performed on content data, and

(b) an error detection code for detecting an error in the descramble key.

10 8. An optical disk of recording type on which data is recordable,

wherein said optical disk includes a data recording and reproducing area for recording data therein and reproducing data therefrom, and

15 wherein said data recording and reproducing area includes an area for recording therein, content data which is at least one of encrypted image data and encrypted music data, and a descramble key for decrypting a cipher which has been performed on the content data.

20 9. The optical disk as claimed in claim 8, wherein said content data and said descramble key are recorded in the same sector.

10. The optical disk as claimed in claim 8,  
wherein said content data and said descramble key  
25 are respectively recorded in sectors different from each other.



11. The optical disk as claimed in claim 10,  
wherein a pointer for pointing an area for recording  
the descramble key therein is recorded in the sector in which  
the content data is recorded.

5 12. An optical disk of recording type on which data  
is recordable, including:

a read-only disk identification information area for  
recording therein disk identification information for  
identifying said optical disk;

10 a data recording and reproducing area for recording  
therein and reproducing therefrom, content data including at  
least one of encrypted image data and encrypted music data; and

a key management information area for recording  
therein, key information used when reproducing the content data,  
15 and a descramble key which is encrypted using the disk  
identification information as a key.

13. An optical disk recording and reproducing  
apparatus for controlling at least one of:

(a) a recording operation for recording data in a  
20 data recording and reproducing area of an optical disk of  
recording type on which data is recordable, and

(b) a reproducing operation for reproducing data from  
the data recording and reproducing area,

wherein said optical disk includes a disk  
25 identification information area for recording therein disk

identification information for identifying said optical disk,  
and

wherein said optical disk recording and reproducing  
apparatus comprises;

5               reproducing means for reproducing said disk  
identification information from said disk identification  
information area; and

              control means for judging whether or not at least  
one of the recording operation and the reproducing operation  
10 is performed based on the reproduced disk identification  
information, and for controlling said optical disk recording  
and reproducing apparatus to perform at least one of the  
recording operation and the reproducing operation in response  
to a judgment result.

15               14. An optical disk recording apparatus for  
recording content data on an optical disk of recording type on  
which data is recordable,

              wherein said optical disk includes an area for  
recording a disk identification information area for  
20 identifying said optical disk, and

              wherein said optical disk recording apparatus  
comprises:

              reproducing means for reproducing the disk  
identification information from the disk identification  
25 information area, and

recording means for recording at least partially encrypted data on the optical disk, using the reproduced disk identification information as a key.

15        15. The optical disk recording apparatus as claimed  
in claim 14,

wherein said encrypted data includes a descramble key for decrypting a cipher which has been performed on the content data.

10        16. The optical disk recording apparatus as claimed  
in claim 14,

wherein said encrypted data includes a descramble key for decrypting a cipher which has been performed on the content data, and an error detection code for detecting an error in the descramble key.

15        17. An optical disk reproducing apparatus for  
reproducing content data from an optical disk of recording type  
on which data is recordable,

wherein said optical disk includes a disk  
identification information area for recording therein disk  
20        identification information for identifying said optical disk,  
and

wherein said optical disk reproducing apparatus  
comprises:

reproducing means for reproducing said disk  
25        identification information from said disk identification

information area, and

decrypted means for decrypting at least partially encrypted data using the reproduced disk identification information as a key after reproducing said at least partially encrypted data from said optical disk.

18. The optical disk reproducing apparatus as claimed in claim 17,

wherein the data to be decrypted includes a descramble key for decrypting a cipher which has been performed on the content data.

19. The optical disk reproducing apparatus as claimed in claim 17,

wherein the data to be decrypted includes a descramble key for decrypting a cipher which has been performed on the content data, and an error detection code for detecting an error in the descramble key, and

wherein said decrypting means detects an error included in said descramble key based on said error detection code.

20. An optical disk recording apparatus for recording content data on an optical disk of recording type on which data is recordable, comprising:

recording means for recording on said optical disk, encrypted content data and a descramble key for decrypting a cipher which has been performed on the content data.

21. The optical disk recording apparatus as claimed  
in claim 20,

wherein said recording means records the encrypted  
content data in a predetermined first sector, and records the  
5 descramble key in a second sector different from the first  
sector.

22. The optical disk recording apparatus as claimed  
in claim 21,

wherein said recording means records a pointer for  
10 pointing an area of the second sector in which the descramble  
key is recorded, in the first sector in which the encrypted  
content data is recorded.

23. An optical disk reproducing apparatus for  
reproducing content data from an optical disk of recording type  
15 on which data is recordable, comprising:

reproducing means for reproducing encrypted content  
data and a descramble key for decrypting a cipher which has been  
performed on the content data, from the optical disk.

24. The optical disk as claimed in claim 23,  
20 wherein said reproducing means reproduces the  
encrypted content data from a first sector of the optical disk,  
and reproduces the descramble key from a second sector of the  
optical disk different from the first sector.

25. The optical disk as claimed in claim 24,  
25 wherein said reproducing means reproduces a pointer

for pointing an area of the second sector from which the descramble key is reproduced, from the first sector in which the encrypted content data is recorded.

26. An optical disk recording apparatus for  
5 allocating and recording information about a descramble key required for encrypting data content, into a key management information area of an optical disk of recording type on which data is recordable, comprising:

acquiring means for acquiring information about the  
10 descramble key required for content data to be recorded; and

allocating means for reproducing the information about the descramble key which is recorded in the key management information area, and for allocating an area for recording a descramble key to be recorded, within the key management  
15 information area, based on the reproduced descramble key and the acquired information about the descramble key.

27. An optical disk recording apparatus for recording information about a descramble key required for encrypting content data in a key management information area  
20 of an optical disk of recording type on which data is recordable, comprising:

acquiring means for acquiring a descramble key required for reproducing content data; and

recording means for reproducing information about  
25 the descramble key which is recorded in the key management

information area, and recording the acquired descramble key so as to allocate the same acquired descramble key within the key management information area, based on the reproduced information about the descramble key.

5                   28. An optical disk recording apparatus for recording content data on an optical disk of recording type on which data is recordable,

                  wherein said optical disk includes a disk identification information area for recording therein disk  
10 identification information for identifying the optical disk; and

                  wherein said optical disk recording apparatus comprises:

                  reproducing means for reproducing the disk  
15 identification information for identifying said optical disk from the disk identification information area;

                  judging means for judging whether or not content data can be recorded on the optical disk based on the reproduced disk identification information;

20                   allocating means for allocating an area for recording a descramble key required for encrypting the content data, within the key management information area of said optical disk when judging that the content data can be recorded on the optical disk; and

25                   recording means for recording a key index for

indicating an area for recording a descramble key of content data to be recorded, in the same sector as the sector in which the content data to be recorded is recorded.

29. An optical disk reproducing apparatus for  
5 reproducing a descramble key from a key management information area of an optical disk of recording type on which data is recordable,

wherein said optical disk includes a disk  
identification information area for recording therein disk  
10 identification information for identifying said optical disk,

wherein said optical disk reproducing apparatus  
comprises:

first reproducing means for reproducing data from  
said key management information area;

15 judging means, based on the reproduced data in a sector area within the key management information area, for judging whether or not the data in said sector area is scrambled;

second reproducing means for reproducing a key index  
which is recorded in the same sector area as the sector area  
20 in which the data in the sector area is recorded when judging that the data in the sector area is scrambled, and reproducing a descramble key from a descramble key area indicated by the reproduced key index;

third reproducing means for reproducing the disk  
25 identification information from the disk identification



information area; and

decrypting means for reproducing the descramble key by decrypting the reproduced and encrypted descramble key using the reproduced disk identification information as a key.

5           30. The optical disk as claimed in claim 29, wherein an error detection code is given to the decrypted descramble key, and

          wherein said decrypting means judges whether or not there is an error in the decrypted descramble key, based on the  
10 error detection code which is given to the decrypted descramble key, and judges whether or not the decrypted descramble key should be reproduced based on a judgement result.

          31. An optical disk recording and reproducing method for controlling at least one of:

15           (a) a recording operation for recording data into a data recording and reproducing area of an optical disk of recording type on which data is recordable, and

          (b) a reproducing operation for reproducing the data from the data recording and reproducing area,

20           wherein said optical disk includes a disk identification information area for recording therein disk identification information for identifying said optical disk, and

          wherein said method includes the steps of:  
25           reproducing the disk identification information

from the disk identification information area; and

judging whether or not at least one of the recording operation and the reproducing operation is performed based on the reproduced disk identification information, and

5 controlling the recording operation and the reproducing operation to perform at least one of the recording operation and the reproducing operation based on a judgement result.

32. An optical disk recording method for recording content data on an optical disk of recording type on which data  
10 is recordable,

wherein said optical disk includes a disk identification information area for recording therein disk identification information for identifying said optical disk, and

15 wherein said method includes the steps of:  
reproducing disk identification information from the disk identification information area; and

recording at least partially encrypted data on the optical disk, using the reproduced disk identification  
20 information as a key.

33. An optical disk reproducing method for reproducing content data from an optical disk of recording type on which data is recordable,

wherein said optical disk includes a disk  
25 identification information area for recording therein disk

identification information for identifying said optical disk,  
and

wherein said method includes of the steps of:

reproducing the disk identification information  
5 from the disk identification information area; and

decrypting at least partially encrypted data using  
the reproduced disk identification information as a key, after  
reproducing said at least partially encrypted data.

34. An optical disk recording method for recording  
10 content data on an optical disk of recording type on which data  
is recordable, including the steps of:

recording encrypted content data and a descramble  
key for decrypting a cipher which has been performed on the  
content data, on said optical disk.

15 35. An optical disk reproducing method for  
reproducing content data from an optical disk of recording type  
on which data is recordable, including the steps of:

reproducing encrypted content data and a descramble  
key for decrypting a cipher which has been performed on the  
20 content data, from said optical disk.

36. An optical disk recording method for allocating  
and recording information about a descramble key required for  
encrypting content data into a key management information area  
of an optical disk of recording type on which data is recordable,  
25 including the steps of:

acquiring information about a descramble key  
required for content data to be recorded; and

reproducing information about the descramble key  
which is recorded in the key management information area, and  
5 allocating an area for recording therein the descramble key to  
be recorded, within the key management information area, based  
on the reproduced information about the descramble key and the  
acquired information about the descramble key.

37. An optical disk recording method for recording  
10 information about a descramble key required for encrypting  
content data in a key management information area of an optical  
disk of recording type on which data is recordable, including  
the steps of:

acquiring a descramble key required for reproducing  
15 content data; and

reproducing information about the descramble key  
which is recorded in the key management information area, and  
recording the acquired descramble key so as to allocate the  
acquired descramble key within the key management information  
20 area, based on the reproduced information about the descramble  
key.

38. An optical disk recording method for recording  
content data on an optical disk of recording type on which data  
is recordable,

25 wherein said optical disk includes a disk

identification information area for recording therein disk  
identification information for identifying said optical disk,  
and

wherein said method includes the steps of:

5 reproducing the disk identification information  
from the disk identification information area;

judging whether or not content data can be recorded  
on the optical disk based on the reproduced disk identification  
information;

10 allocating an area for recording a descramble key  
required for encrypting the content data, into the key  
management information area within the optical disk, when  
judging that the content data can be recorded on the optical  
disk; and

15 recording a key index for indicating an area for  
recording the descramble key of content data to be recorded is  
recorded in the same sector in which the content data to be  
recorded is recorded.

39. An optical disk reproducing method for  
20 reproducing a descramble key from a key management information  
area of an optical disk of recording type on which data is  
recordable,

wherein the optical disk includes a disk  
identification information area for recording disk  
25 identification information for identifying the optical disk,

and

wherein said method includes the steps of:

reproducing data from the key management information area;

5               based on data in a sector area within the reproduced key management information area, judging whether or not the data in the sector area is scrambled;

reproducing a key index which is recorded in the same sector area as the sector area in which the data in the sector  
10           area is recorded, when judging that the data in the sector area is scrambled, and reproducing a descramble key from a descramble key area indicated by the reproduced key index;

reproducing the disk identification information from the disk identification information area; and

15               reproducing the descramble key by decrypting the reproduced and encrypted descramble key using the reproduced disk identification information as a key.

40. An optical disk of recording type on which data is recordable, including:

20               a first information area for recording first disk information therein;

a second information area for recording therein second disk information for identifying each optical disk; and

a user data area for recording information data by  
25           irradiating a light beam onto said user data area.

41. The optical disk as claimed in claim 40,  
wherein the second disk information is recorded by  
partially removing a recording film within the second  
information area, in an elongated shape in a radial direction  
5 and at a plurality of areas.

42. The optical disk as claimed in claim 40 or 41,  
wherein the second information area is arranged  
within the first information area.

43. The optical disk as claimed in claim 40 or 41,  
10 wherein the second information area is arranged on  
an inner peripheral side of the first information area.

44. The optical disk as claimed in claim 40 or 41,  
wherein the second information area is arranged over  
a partial area within the first information area, and over  
15 another area located on the inner peripheral side of the first  
information area.

45. The optical disk as claimed in any one of claims  
40 to 44,  
wherein the first disk information is recorded in  
20 a form of minute concavo-convex pits.

46. An optical disk of recording type on which data  
is recordable,  
wherein said optical disk has a sector structure  
comprising a plurality of sectors,  
25 wherein each of the sectors includes a sector header

area and a main data area for recording encrypted data therein,  
wherein the sector header area includes a decipher  
key information area for recording therein at least one decipher  
key required for decrypting the encrypted data, and

5                wherein a size of the decipher key information area  
is smaller than that of each decipher key.

47. The optical disk as claimed in claim 46,  
wherein each decipher key is divided into a plurality  
of divided decipher keys having a predetermined size, and  
10               wherein said plurality of divided decipher keys are  
recorded in respective decipher key information areas of a  
plurality of continuous sectors.

48. The optical disk as claimed in claim 47,  
wherein the number of the divided decipher keys is  
15 a measure of the number of the sectors which are included in  
error correction code (ECC) blocks, and which are a plurality  
of sectors required for error correction.

49. The optical disk as claimed in claim 46,  
wherein said respective decipher keys are recorded  
20 in a decipher key table having a plurality of decipher keys,  
and

wherein indexes for indicating recorded positions  
of the decipher keys required for decrypting the encrypted data  
within the decipher key table are recorded in the decipher key  
25 information areas of the sectors.



50. The optical disk as claimed in claim 49,  
wherein decipher key status areas for recording  
decipher key statuses on the respective decipher key areas of  
the decipher key table are recorded as information for  
5 representing a recorded status of the decipher key table.

51. The optical disk as claimed in claim 49,  
wherein the decipher key table is recorded over a  
plurality of different error correction code (ECC) blocks.

52. The optical disk as claimed in claim 49,  
10 wherein the respective decipher keys are managed and  
recorded in at least one unit of a file unit managed in a file  
management area, and an extent unit comprising a plurality of  
continuous sectors on the optical disk.

53. An optical disk of recording type on which data  
15 is recordable,

wherein said optical disk includes a main data area  
for recording data therein,

wherein said main data area includes a non-encrypted  
area for recording data in a non-encrypted status, and an  
20 encrypted area for recording data in an encrypted status,

wherein said non-encrypted area includes decipher  
key conversion data used for conversion of a decipher key for  
decrypting data, and

wherein data in the encrypted area is encrypted using  
25 the decipher key which is converted using the decipher key

conversion data.

54. The optical disk as claimed in claim 53,  
wherein said main data area includes a control  
information recording sector for recording control information  
5 used for controlling data reproduction in a non-encrypted  
status, and a data recording sector for recording data in an  
encrypted status,

wherein said control information recording sector  
includes decipher key conversion data used for conversion of  
10 the decipher key, and

wherein data in the data recording sector is  
encrypted using the decipher key which is converted using the  
decipher key conversion data.

55. The optical disk as claimed in claim 54,  
15 wherein said data recording sector includes a  
non-encrypted area for recording data in a non-encrypted status,  
and an encrypted area for recording data in an encrypted status,  
wherein said non-encrypted area is further decipher  
key conversion data, and

20 wherein AV data in the encrypted area is encrypted  
using a decipher key obtained by further converting a decipher  
key, which is converted using the decipher key conversion data,  
using a further second decipher key.

56. The optical disk as claimed in claim 53,  
25 wherein said decipher key conversion data includes

at least copying control information of data.

57. An optical disk recording method for recording data on an optical disk of recording type on which data is recordable, including the steps of:

5           reading out a decipher key status which is recorded on the optical disk, and judging whether or not there is an empty area for a decipher key based on the read-out decipher key status;

          reserving a decipher key area and recording the  
10   decipher key in the decipher key area, when judging that there is the empty area for the decipher key;

          setting copyright control information and a decipher key index in at least one unit of a file unit and an extent unit;

          encrypting data using the decipher key, and recording  
15   the encrypted data on the optical disk in at least one unit of a file unit and an extent unit; and

          recording on said optical disk, optical disk file management information for managing data which is recorded on said optical disk.

20           58. An optical disk reproducing method for reproducing data from an optical disk of recording type on which data is recordable, including the steps of:

          reproducing and acquiring a decipher key index from a data recording area in which data to be reproduced is recorded  
25   in a file unit or an extent unit;

reproducing and acquiring a decipher key  
corresponding to the acquired decipher key index; and  
reproducing data in the file unit or the extent unit  
which is encrypted using the decipher key.

5           59. An optical disk deleting method for deleting  
data from an optical disk of recording type on which data is  
recordable, comprising:

reproducing and acquiring a decipher key index from  
a recording area in which data to be deleted is recorded in a  
10 file unit or an extent unit;

updating a decipher key status, which corresponds  
to the acquired decipher key index and which indicates a recorded  
status of a decipher key, and releasing the decipher key; and

updating file management information for managing  
15 data which is recorded on the optical disk, by deleting a file  
entry corresponding to the data to be deleted from the file  
management information.

60. An information processing system comprising:

a data encrypting apparatus for encrypting data using  
20 a cipher key;

an optical disk recording and reproducing apparatus  
for recording a decipher key required for decrypting data on  
an optical disk of recording type, and reproducing the recorded  
decipher key; and

25 a control apparatus connected to said optical disk

recording and reproducing apparatus and the data encrypting apparatus,

wherein said optical disk recording and reproducing apparatus comprises:

5 first recording and reproducing means for recording a decipher key table on the optical disk, and reproducing the decipher key table from the optical disk;

encrypting and decrypting means for encrypting the decipher key, transmitting the encrypted decipher key,  
10 receiving the encrypted decipher key from the control apparatus, and decrypting the encrypted decipher key; and

second recording and reproducing means for recording a decipher key status table for indicating a recorded status of the decipher key on the optical disk, and reproducing the  
15 decipher key status table from the optical disk;

wherein said data encrypting apparatus comprises:

encrypting means for encrypting the decipher key, and transmitting the encrypting decipher key to said control apparatus; and

20 wherein said control apparatus comprises:

receiving means for receiving the encrypted decipher key from said encrypting means of said data encrypting apparatus; and

allocating means for searching for an empty area for  
25 the decipher key based on the reproduced decipher key status

table, allocating the received and encrypted decipher key into the searched empty area, and transmitting the allocated and encrypted decipher key to the optical disk recording and reproducing apparatus, and

5                wherein said encrypting and decrypting means of said optical disk recording and reproducing apparatus receives the allocated and encrypted decipher key from said allocating means of the control apparatus, and decrypts the received encrypted decipher key.

10                61. An information processing system comprising:  
                 an optical disk reproducing apparatus for reproducing a decipher key table comprising data and a plurality of decipher keys required for decrypting the data from an optical disk of recording type;

15                a control apparatus connected to said optical disk reproducing apparatus; and

                 a data decrypting apparatus for decrypting data using the decipher keys,

                 wherein said optical disk reproducing apparatus  
20 comprises:

                 first reproducing means for reproducing the decipher key table from the optical disk;

                 encrypting means for encrypting the reproduced decipher key table, and transmitting the encrypted decipher key  
25 table to said control apparatus; and

second reproducing means for reproducing a decipher key status table for indicating recorded statuses of the plurality of decipher keys from said optical disk;

wherein said control apparatus comprises:

5 receiving means for receiving the encrypted decipher key table from said optical disk reproducing apparatus; and

searching means for searching for the encrypted decipher key required for decrypting data which is recorded on the optical disk from the received decipher key table, based  
10 on the reproduced decipher key status table, and transmitting the searched encrypted decipher key to the data decrypting means; and

wherein said data decrypting apparatus comprises:

first decrypting means for decrypting the encrypted decipher key, and producing the decipher key, and  
15

second decrypting means for decrypting the encrypted data, which is reproduced by said optical disk reproducing apparatus, using the decrypted decipher keys.

62. An optical disk recording apparatus for  
20 recording data on an optical disk of recording type on which data is recordable,

wherein said optical disk includes a non-encrypted area and an encrypted area, and

wherein said optical disk recording apparatus  
25 comprises:

recording means for recording data, including decipher key conversion data used for conversion of a decipher key for decrypting data, in the non-encrypted area in a non-encrypted status, and recording encrypted data in the encrypted area using the decipher key which is converted using the decipher key conversion data.

63. The optical disk recording apparatus as claimed in claim 62,

wherein said optical disk includes a control information recording sector and a data recording sector, and

wherein said recording means records in a non-encrypted status control information used for controlling reproduction of the data in the control information recording sector, converts a cipher key into a converted decipher key using the decipher key conversion data, encrypts data using the converted decipher key, and records the encrypted data in the data recording sector.

64. The optical disk recording apparatus as claimed in claim 63,

wherein said recording means records in a non-encrypted status data including further decipher key conversion data on the non-encrypted area of the data recording sector, converts the cipher key into a converted decipher key, using the decipher key conversion data included in the control information and the further decipher key conversion data,



encrypts data using the converted decipher key, and records the encrypted data in the data recording sector.

65. An optical disk reproducing apparatus for reproducing data from an optical disk of recording type on which data is recordable,

wherein said optical disk includes a non-encrypted area and an encrypted area, and

wherein said optical disk reproducing apparatus comprises:

reproducing means for converting a decipher key into a converted decipher key, using decipher key conversion data which is recorded in the non-encrypted area, decrypting data which is recorded in the encrypted area using the converted decipher key, and reproducing the decrypted data.

66. The optical disk reproducing apparatus as claimed in claim 65,

wherein said optical disk includes a control information recording sector and a data recording sector, and

wherein said reproducing means reproduces control information used for controlling data reproduction from the control information recording sector, converts a decipher key into a converted decipher key using decipher key conversion data included in the control information, decrypts data which is recorded in the data recording sector using the converted decipher key, and reproduces the decrypted data.

67. The optical disk reproducing apparatus as claimed in claim 66,

wherein said reproducing means reproduces further decipher key conversion data which is recorded in the non-encrypted area of the data recording sector, converts the decipher key into a converted decipher key, using decipher key conversion data included in the control information and the reproduced further decipher key conversion data, decrypts data which is recorded in the data recording sector using the converted decipher key, and reproduces the decrypted data.

68. An optical disk recording method for recording data in an optical disk of recording type on which data is recordable,

wherein said optical disk includes a non-encrypted area and an encrypted area, and

wherein said method includes the steps of:

recording in a non-encrypted status data including decipher key conversion data used for conversion of a decipher key for decrypting data in the non-encrypted area, and recording encrypted data in the encrypted area using the decipher key which is converted using the decipher key conversion data.

69. An optical disk reproducing method for reproducing data from an optical disk in which data is recordable,

wherein said optical disk includes a non-encrypted

area and an encrypted area, and

wherein said method includes the steps of:

converting a decipher key into a converted decipher  
key using decipher key conversion data which is recorded in the  
5 non-encrypted area, decrypting data which is recorded on the  
encrypted area using the converted decipher key, and reproduces  
the decrypted data.

70. An optical disk of read-only type for  
reproducing recorded data, including:

10 a data reproducing area for recording data therein;  
and

a read-only disk identification information area for  
recording therein disk identification information for  
identifying said optical disk,

15 wherein said data reproducing area includes an area  
in which data is recorded which is encrypted using information  
including the disk identification information for identifying  
the optical disk as a key.

71. An optical disk of read-only type for  
20 reproducing recorded data,

wherein said optical disk includes a data reproducing  
area for recording data therein, and

wherein said data reproducing area includes content  
data which is at least one of encrypted image data and encrypted  
25 music data, and a descramble key for decrypting a cipher which

has been performed on the content data.

72. An optical disk of read-only type for reproducing recorded data, including:

5 a read-only disk identification information area for recording therein disk identification information for identifying the optical disk;

a data reproducing area for recording therein content data including at least one of encrypted image data and encrypted music data; and

10 a key management information area for recording therein key information used when reproducing the content data, and a descramble key which is encrypted using the disk identification information as a key.

73. An optical disk of read-only type for reproducing recorded data,

wherein said optical disk has a sector structure including a plurality of sectors,

wherein each of the sectors includes a sector header area, and a main data area for recording encrypted data therein,

20 wherein said sector header area includes a decipher key information area for recording therein at least one decipher key required for decrypting the encrypted data, and

wherein a size of the decipher key information area is smaller than that of each decipher key.

*Fig.1*

## FIRST PREFERRED EMBODIMENT

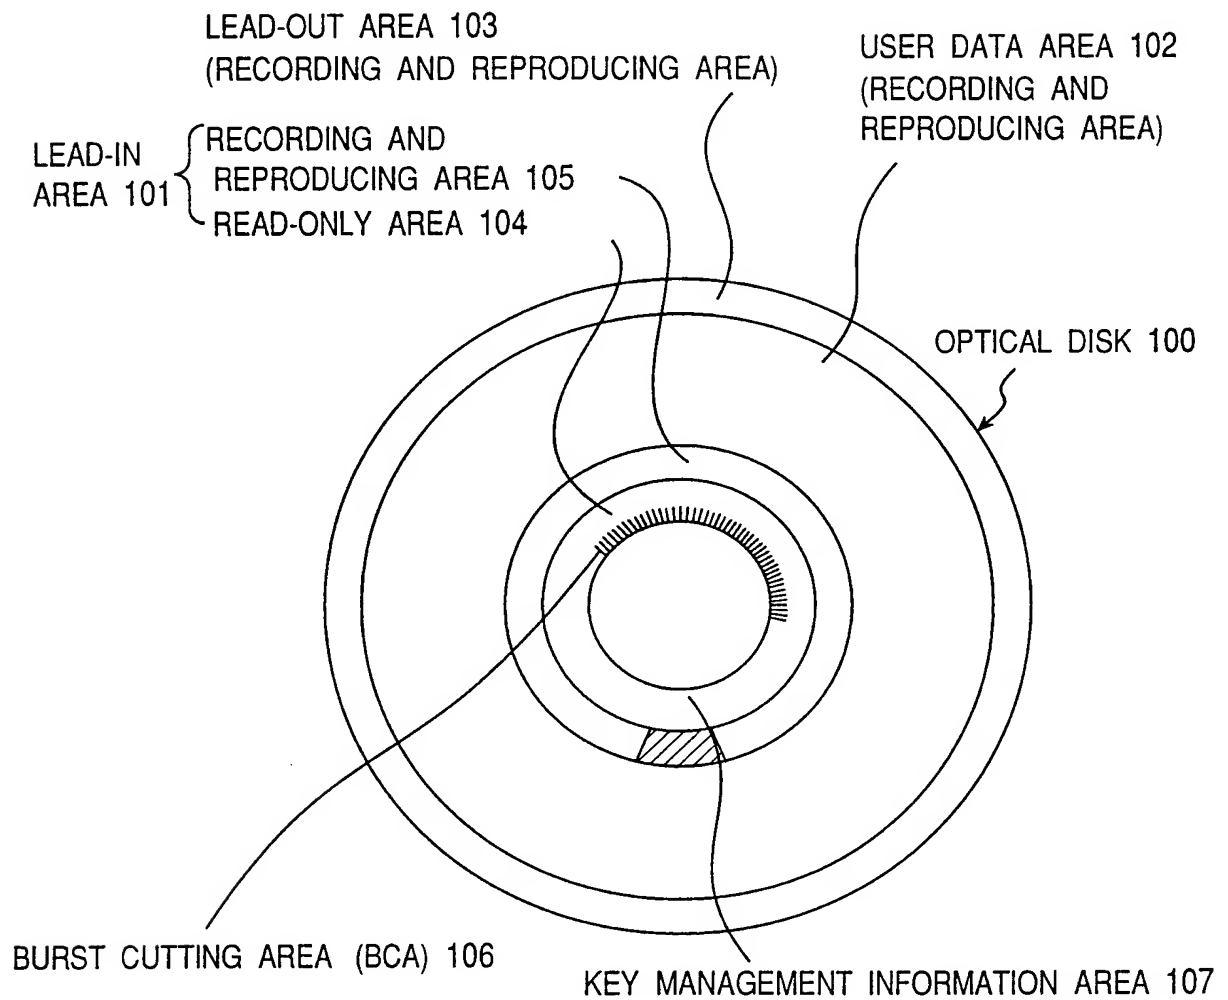


Fig.2A

SECTIONAL VIEW OF OPTICAL DISK  
(BEFORE FORMATION OF BCA)

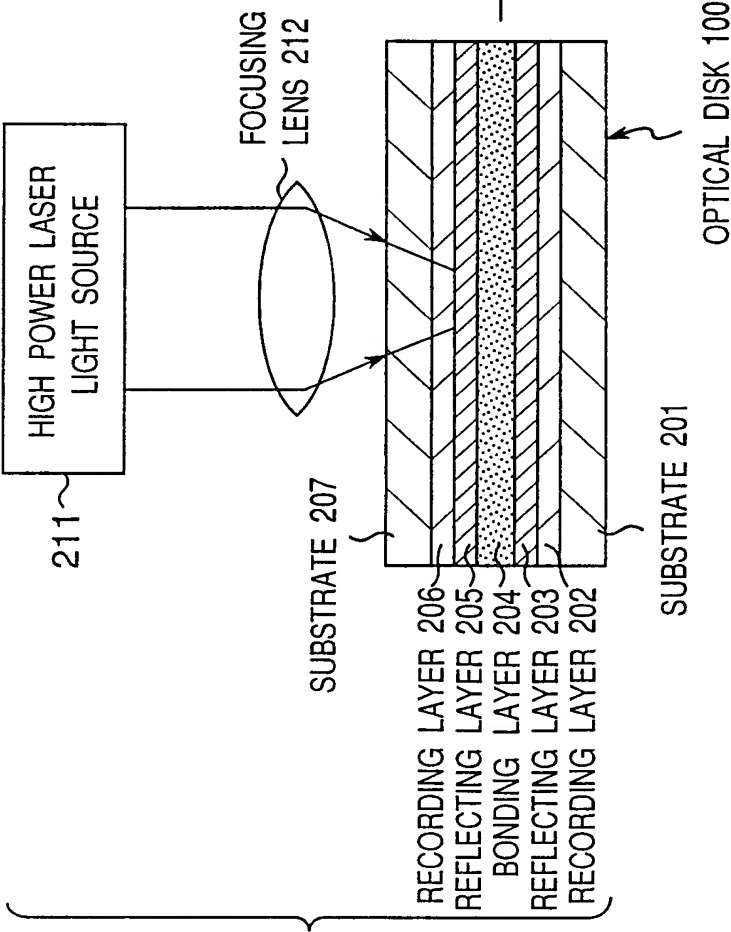


Fig.2B

SECTIONAL VIEW OF OPTICAL DISK  
(AFTER FORMATION OF BCA)

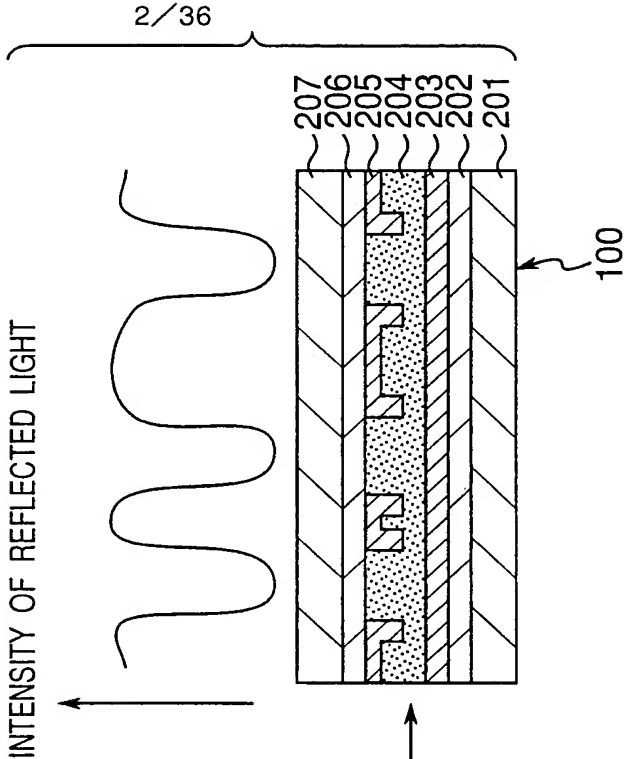


Fig.3

RECORDING FORMAT OF BCA 106

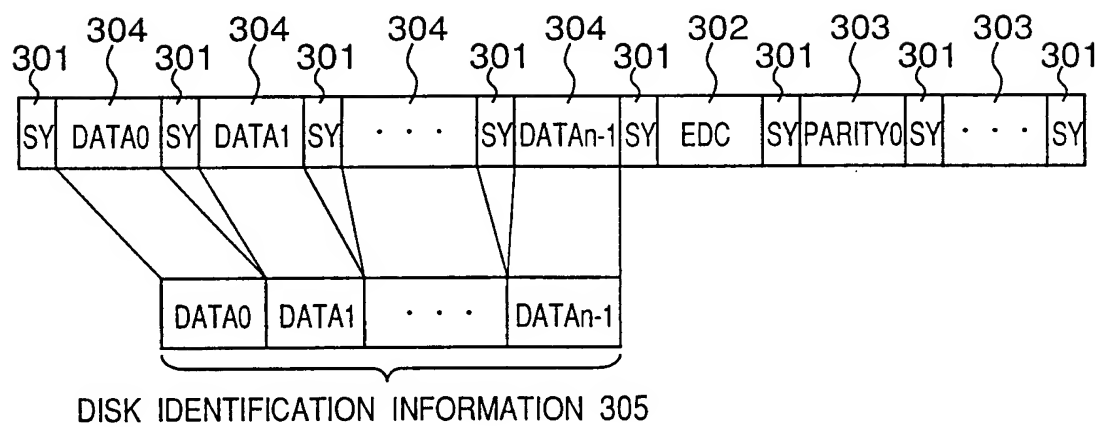


Fig.4

SECTOR STRUCTURE OF SECTOR DATA 401 IN USER DATA AREA 102


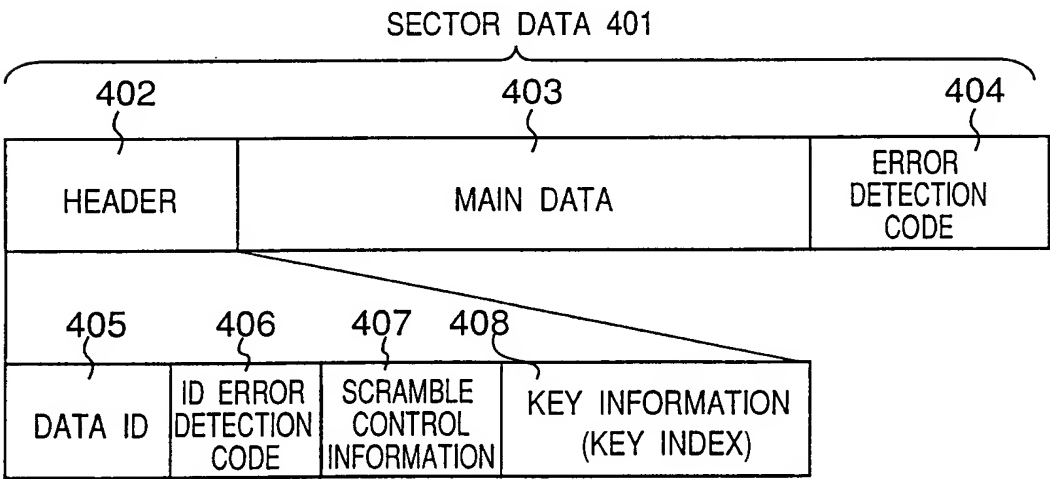



Fig.5



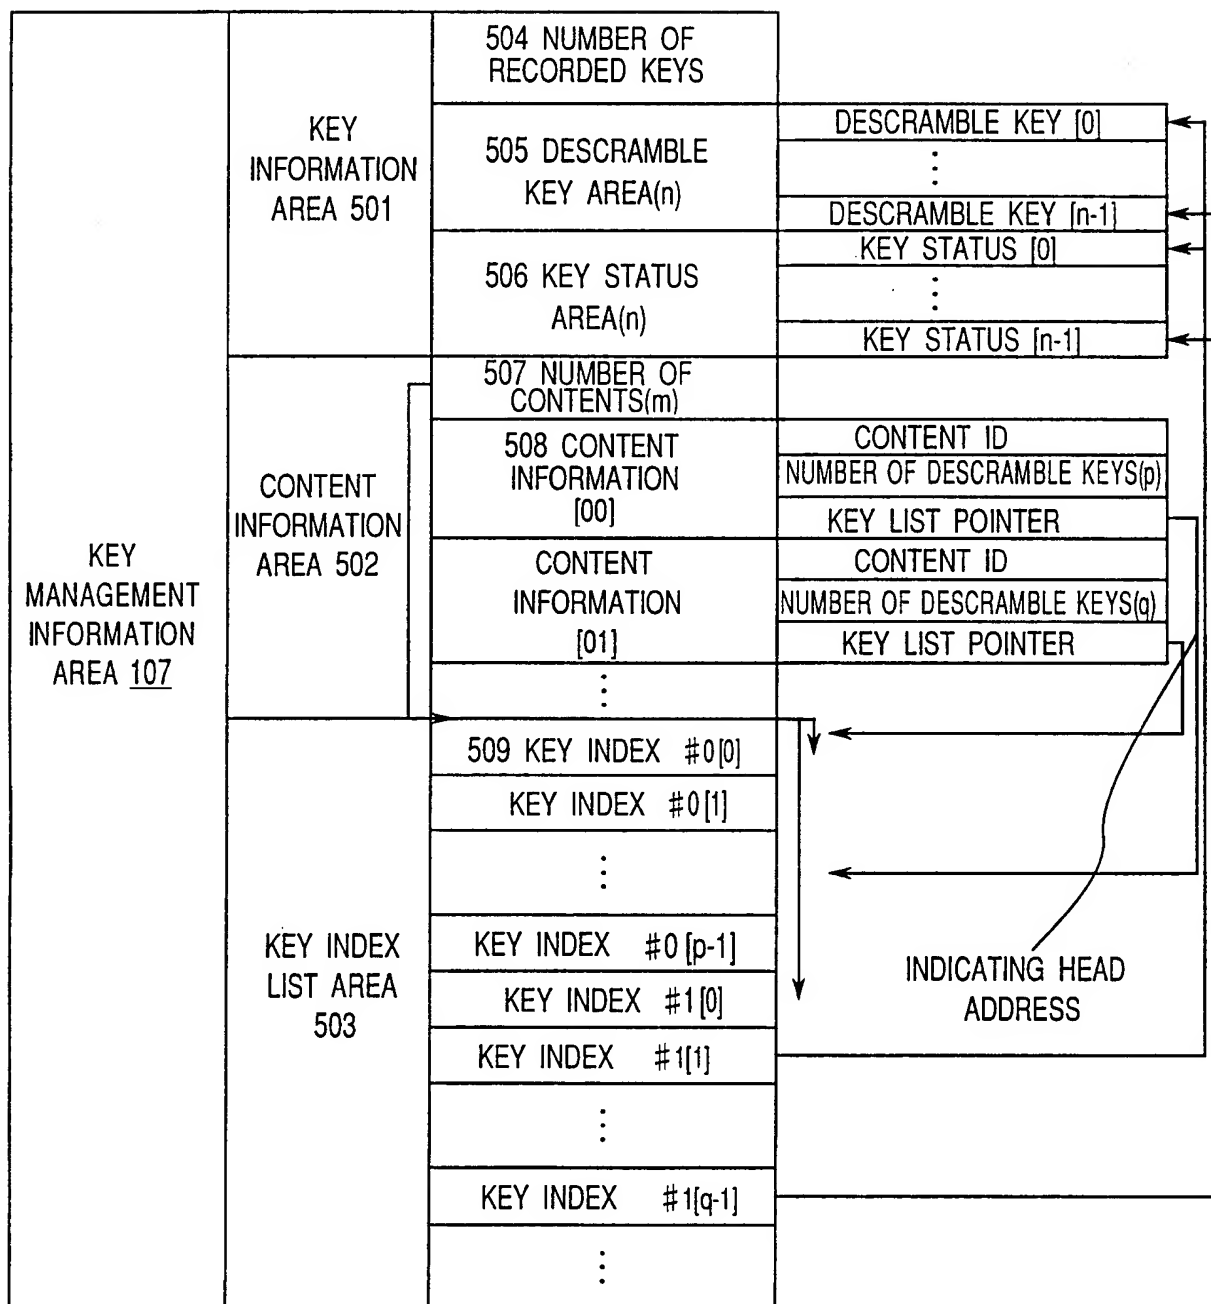

**Fig. 6A**

CASE WHERE DESCRAMBLE KEY IS RECORDED IN SECTOR DATA 401 (MODIFIED FIRST PREFERRED EMBODIMENT)

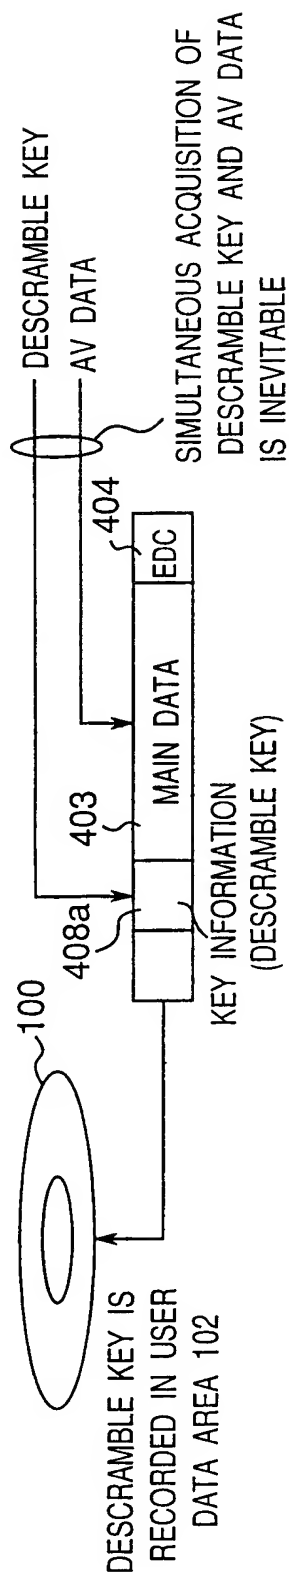

**Fig. 6B**

CASE WHERE KEY INDEX TO DESCRAMBLE KEY IS RECORDED IN SECTOR DATA 401 (FIRST PREFERRED EMBODIMENT)

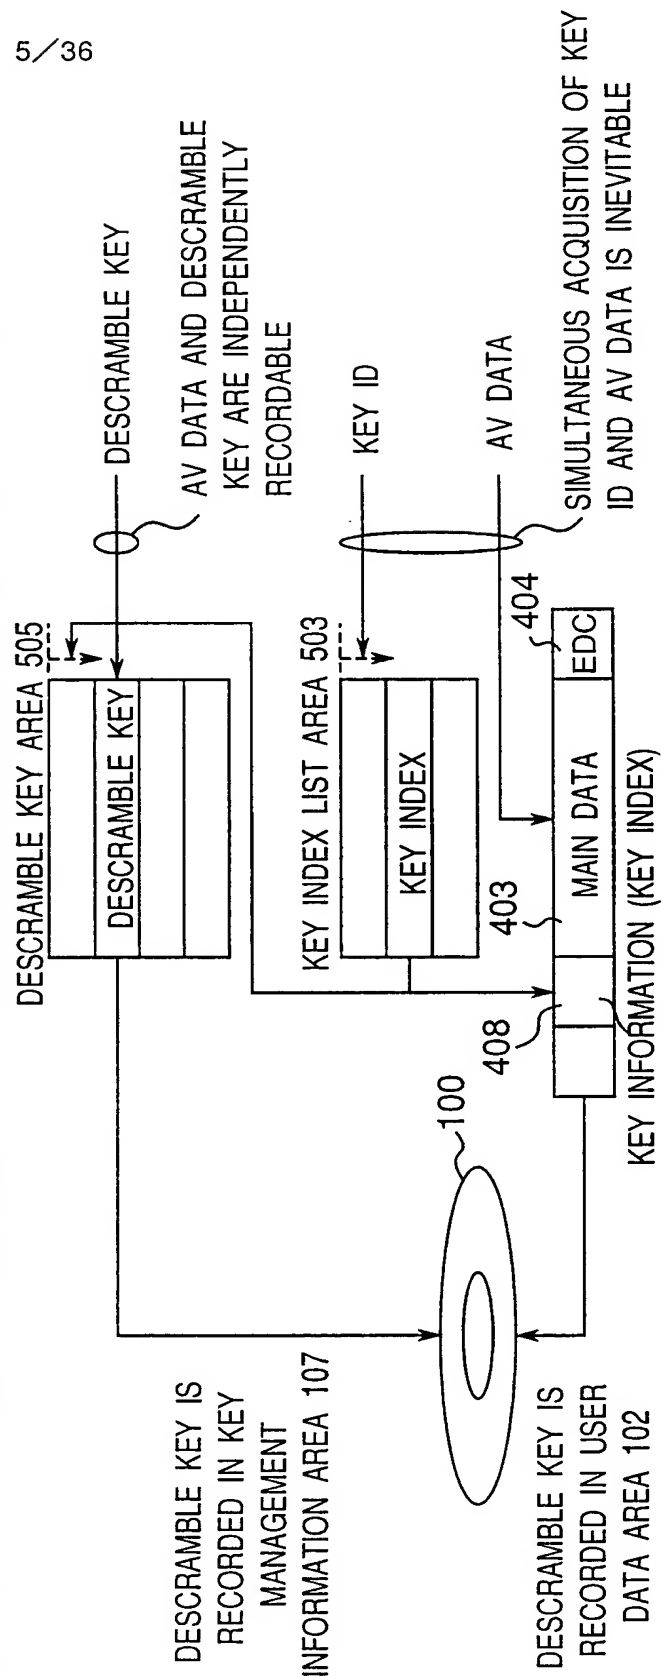


Fig.7

SECOND PREFERRED EMBODIMENT  
OPTICAL DISK RECORDING AND REPRODUCING APPARATUS



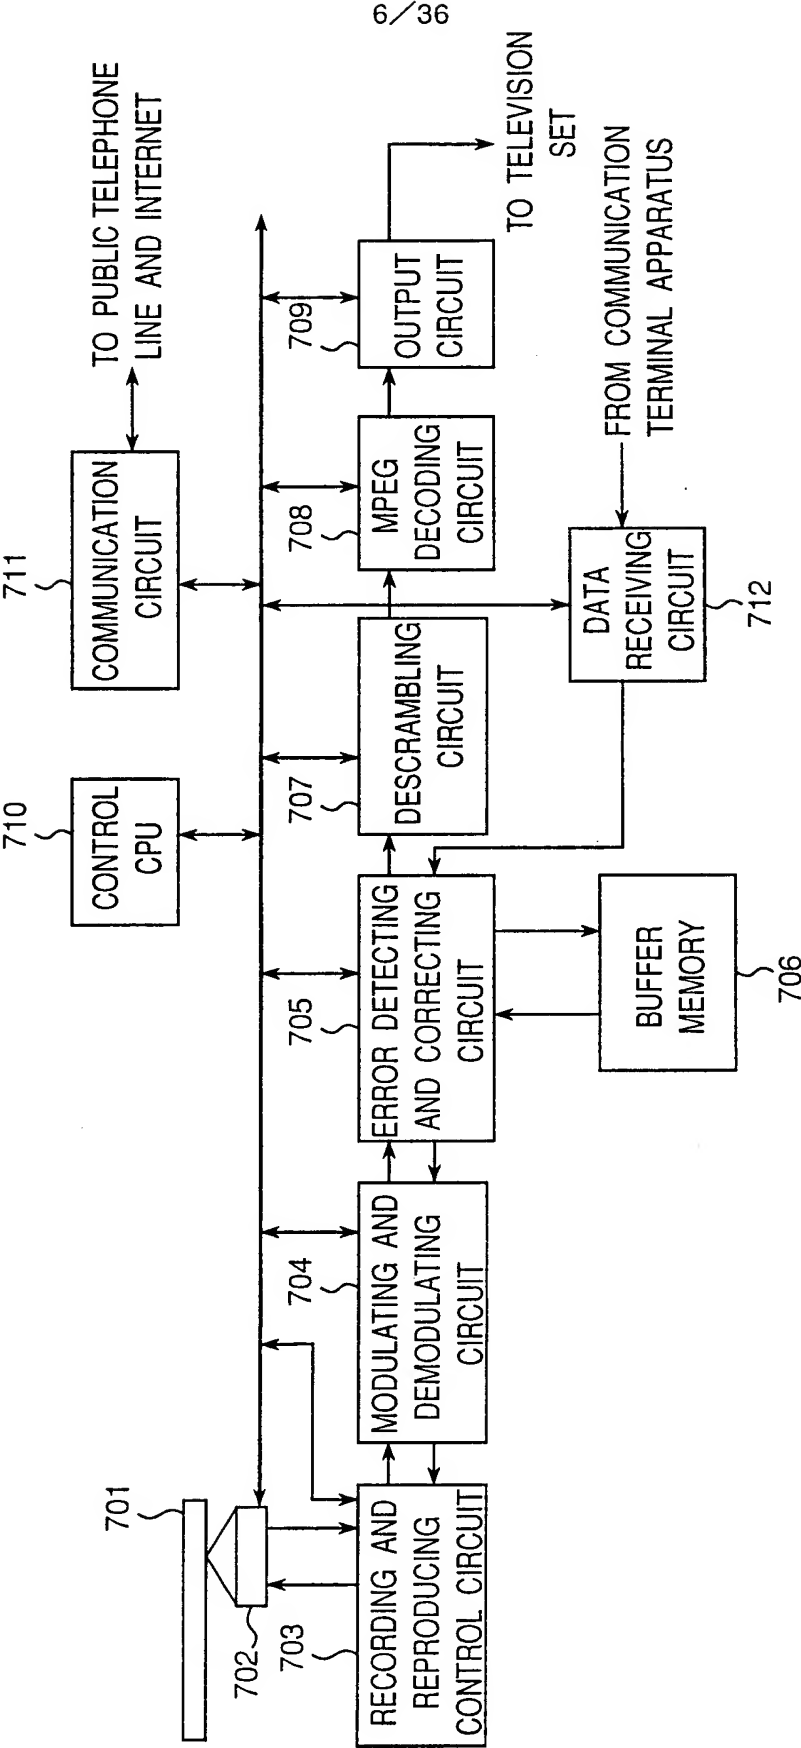



Fig.8

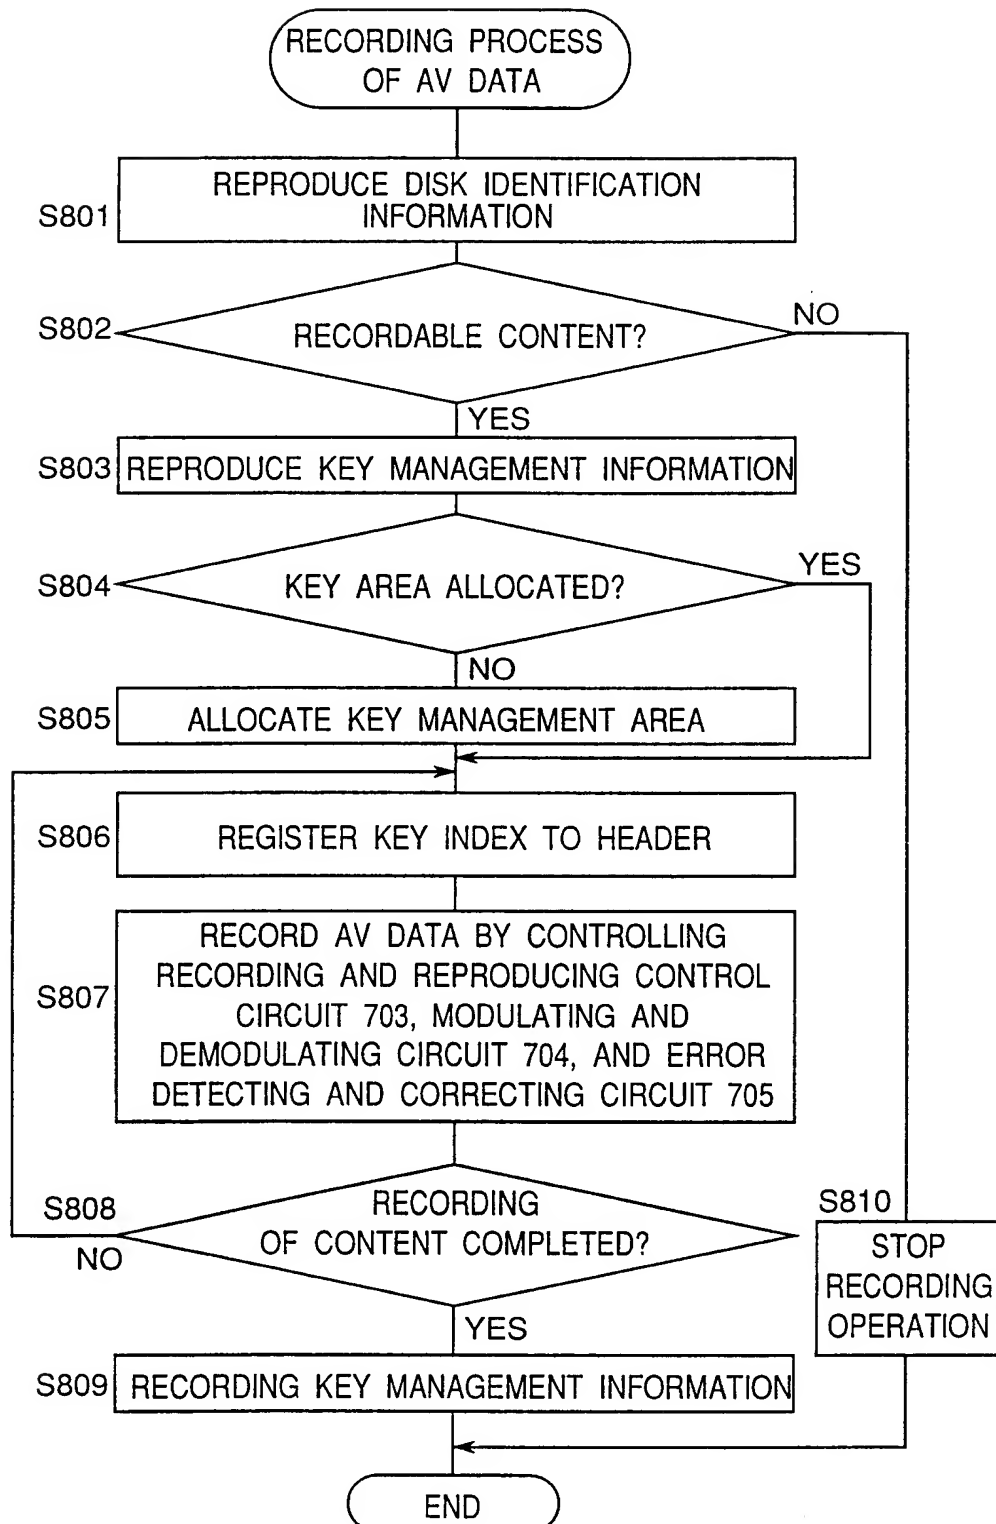

8/36


Fig.9

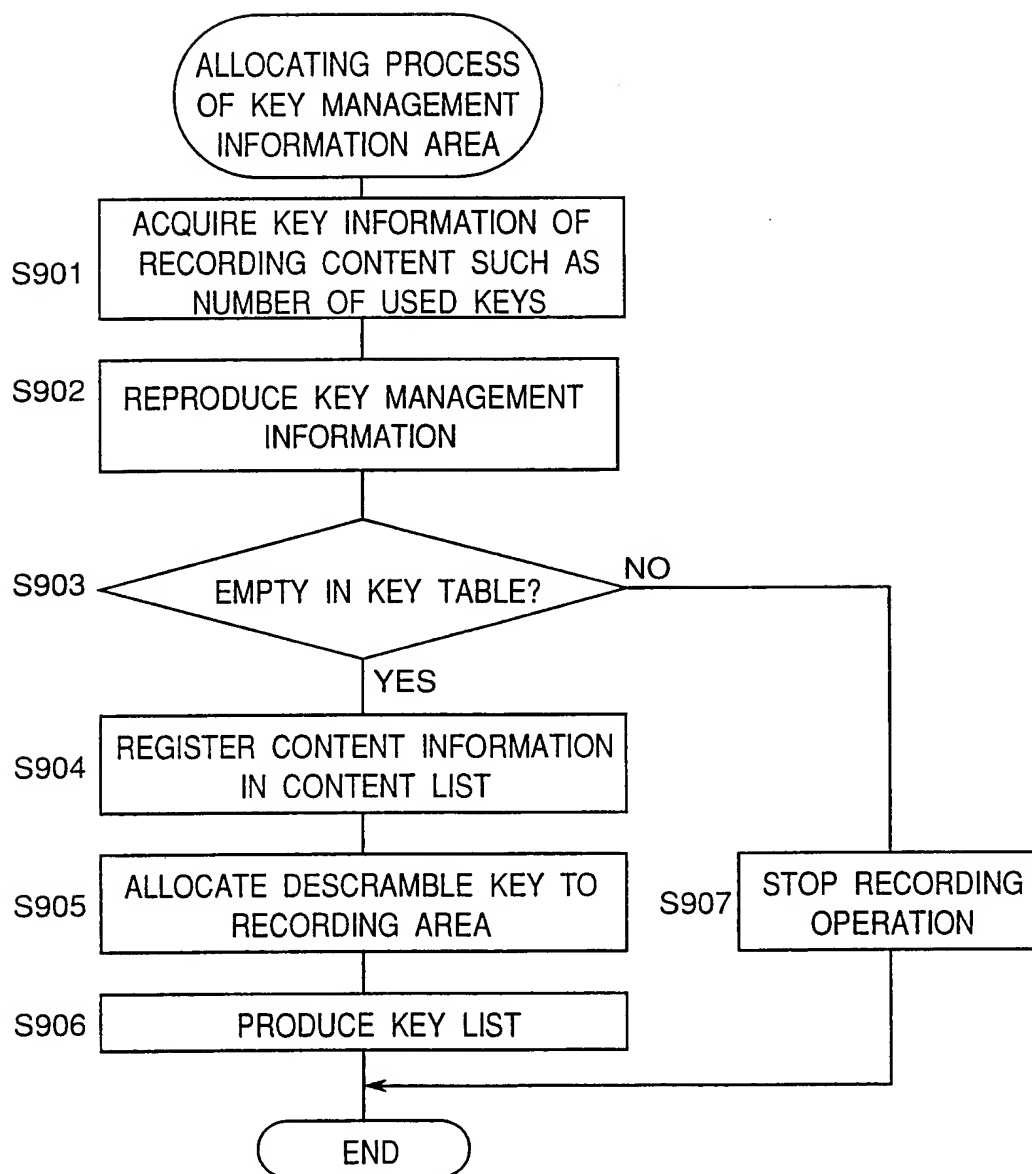

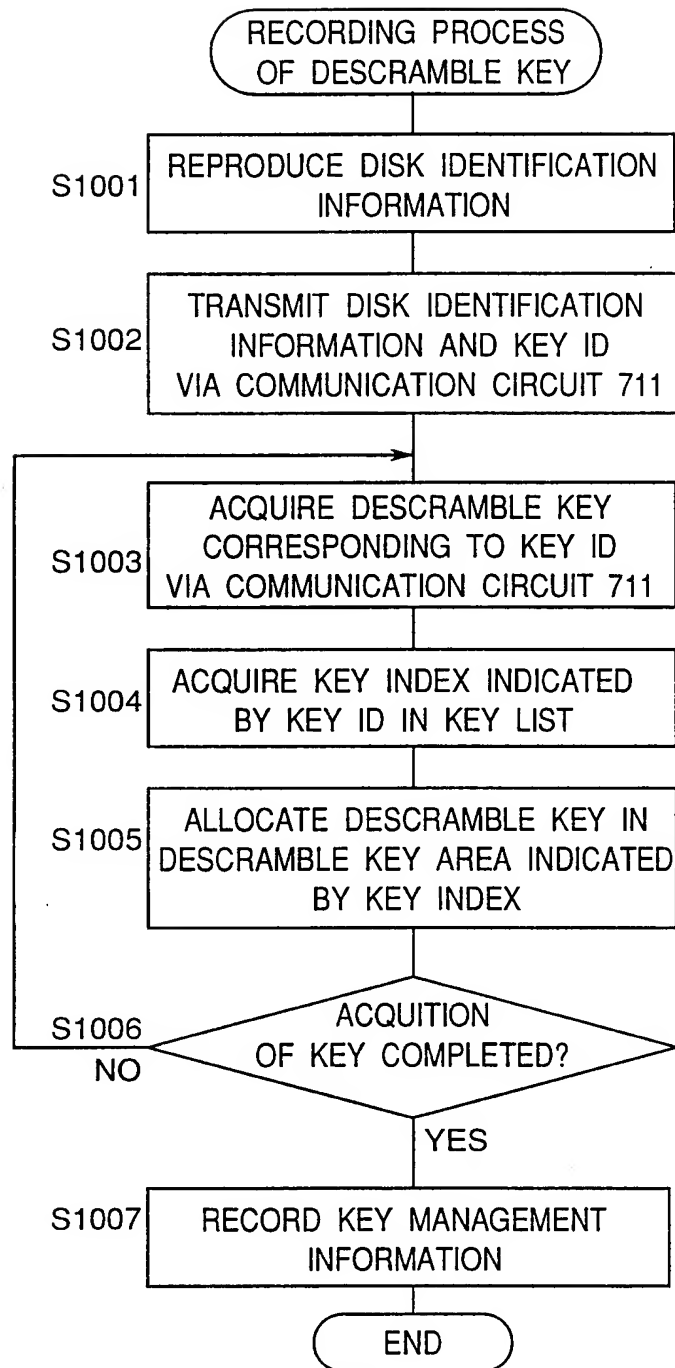*Fig. 10*

10/36

Fig. 11

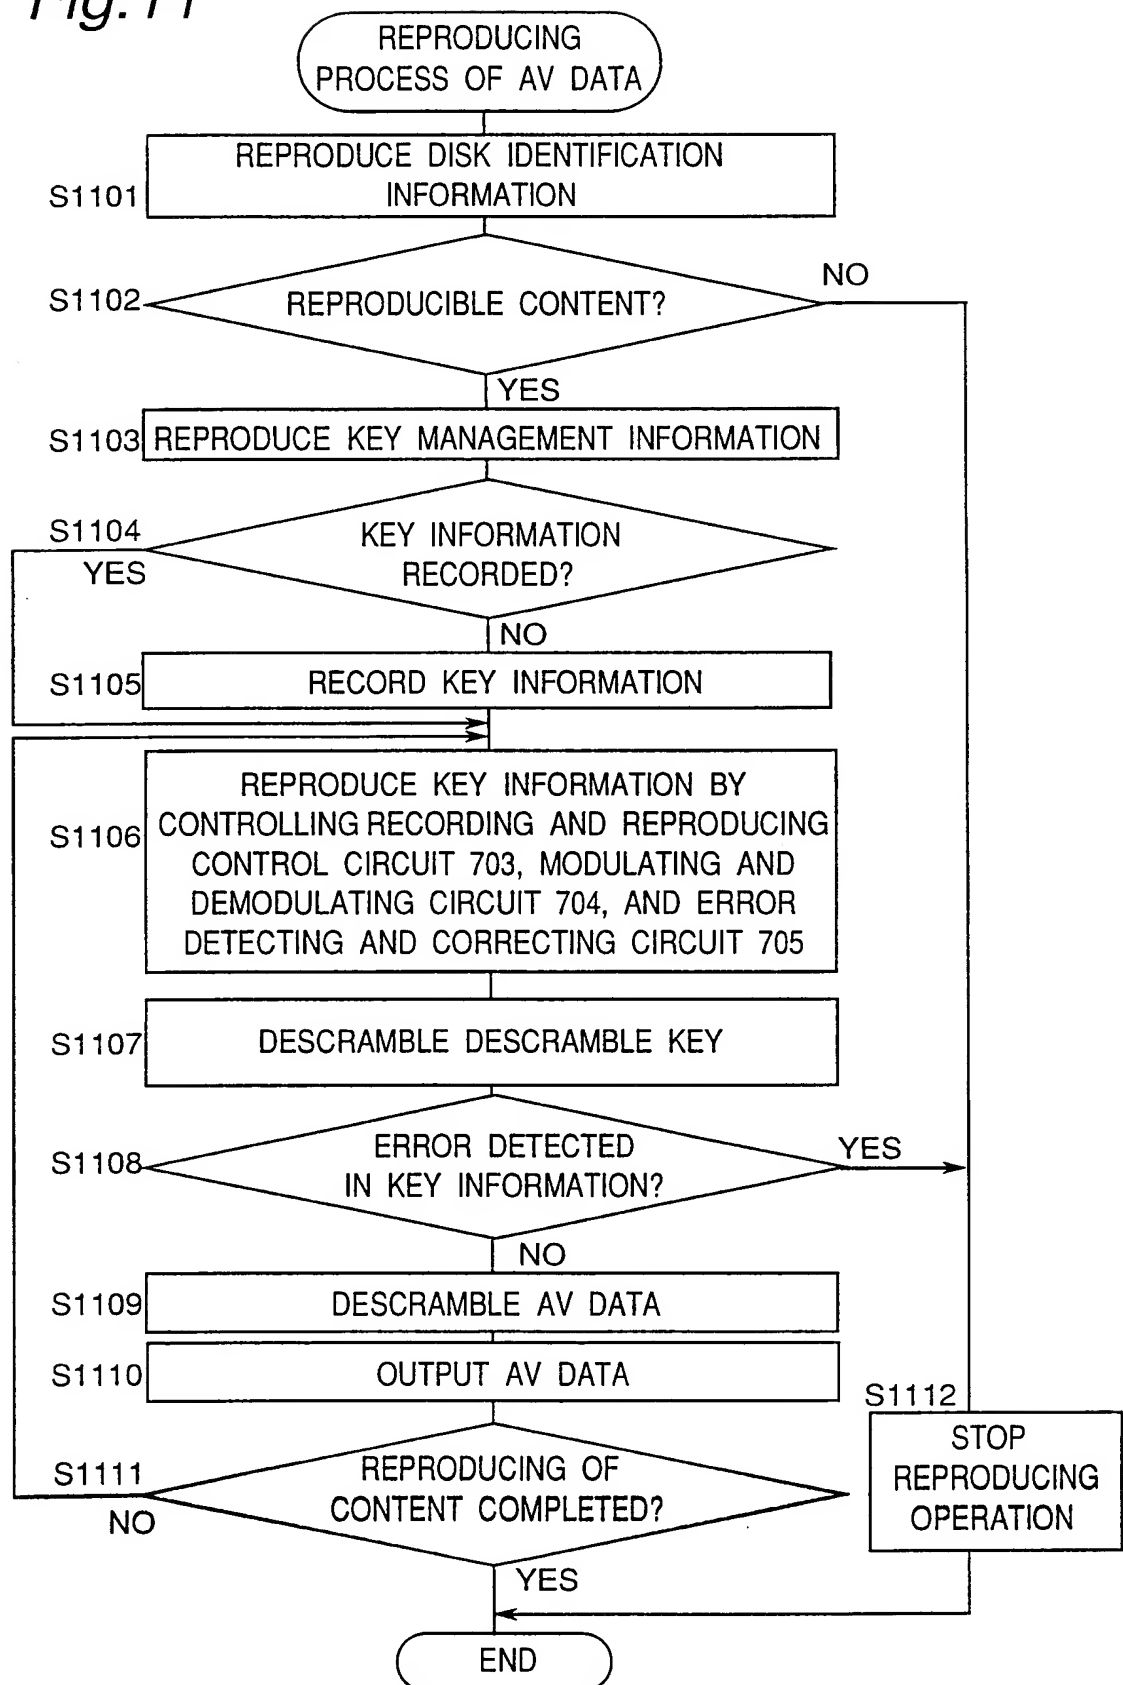

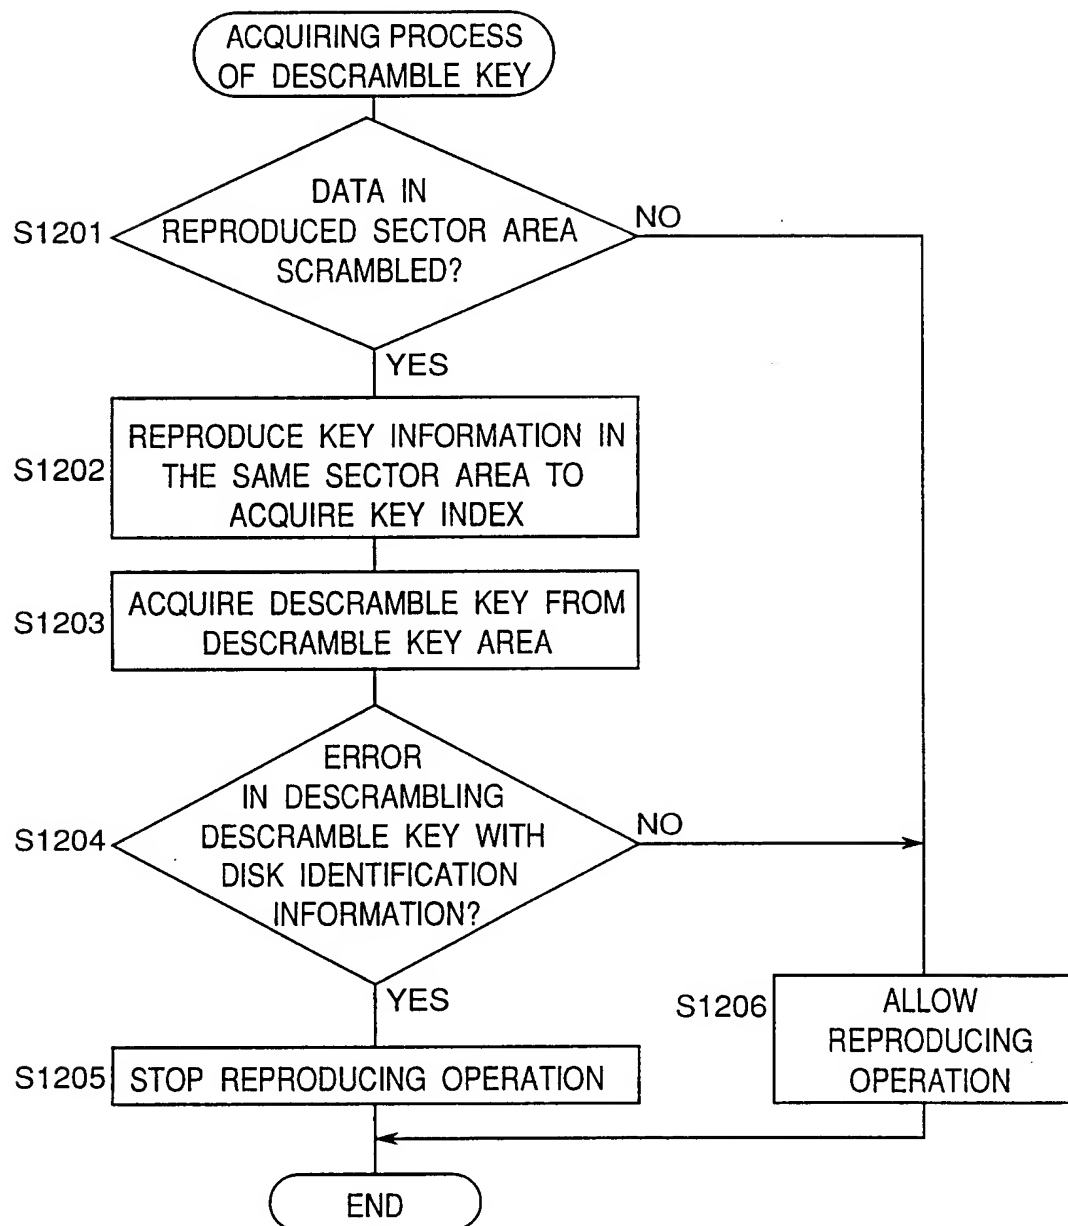
*Fig.12*

Fig.13

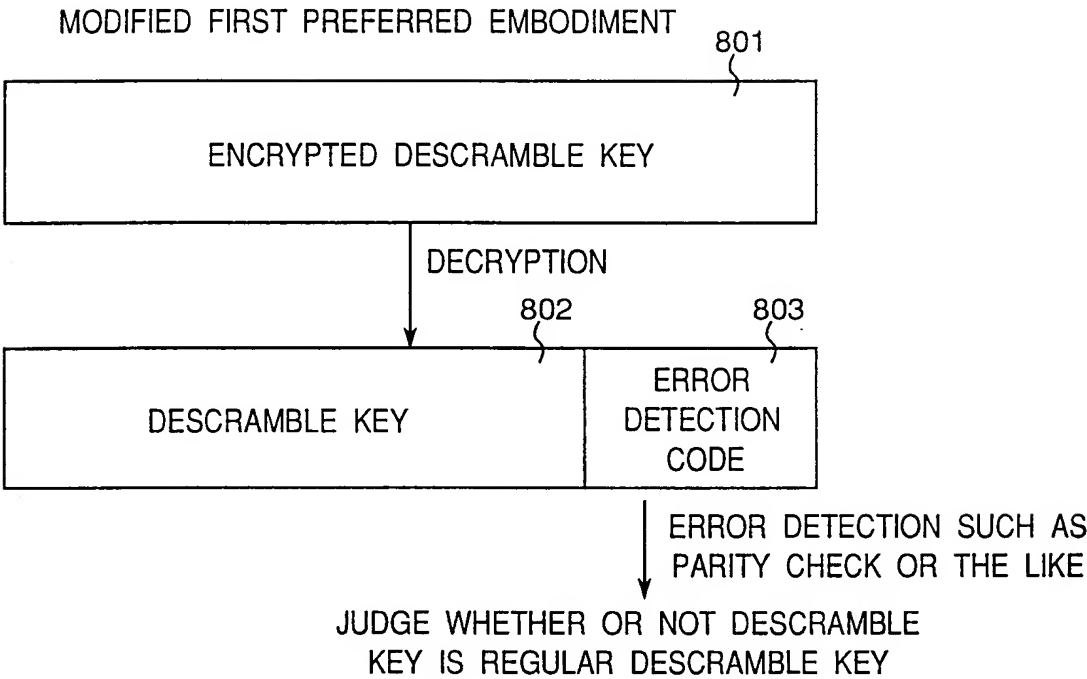


Fig.14

MODIFIED FIRST PREFERRED EMBODIMENT  
DESCRAMBLE AREA MANAGEMENT TABLE

	START ADDRESS 1	END ADDRESS 1	DESCRAMBLE KEY 1
1			
2	START ADDRESS 2	END ADDRESS 2	DESCRAMBLE KEY 2
:	:	:	:
n	START ADDRESS n	END ADDRESS n	DESCRAMBLE KEY n



Fig. 15A CASE WHERE REGION IDENTIFIER IS RECORDED IN RECORDING CONTENT


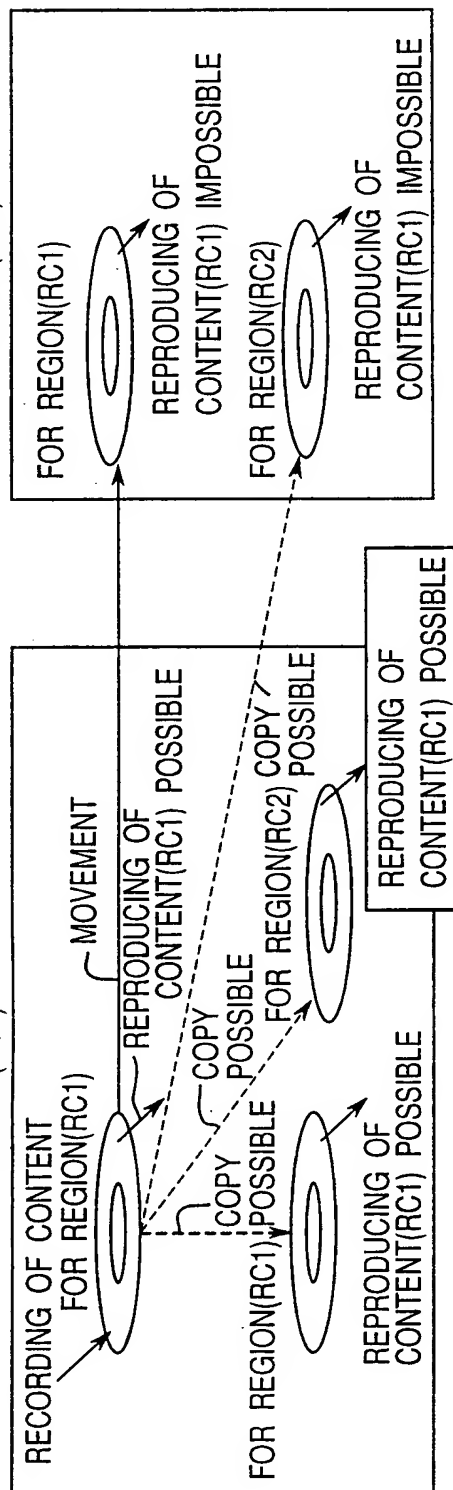


Fig. 15B

13 / 36

CASE WHERE REGION IDENTIFIER IS PREVIOUSLY RECORDED IN SHIPPING OPTICAL DISK

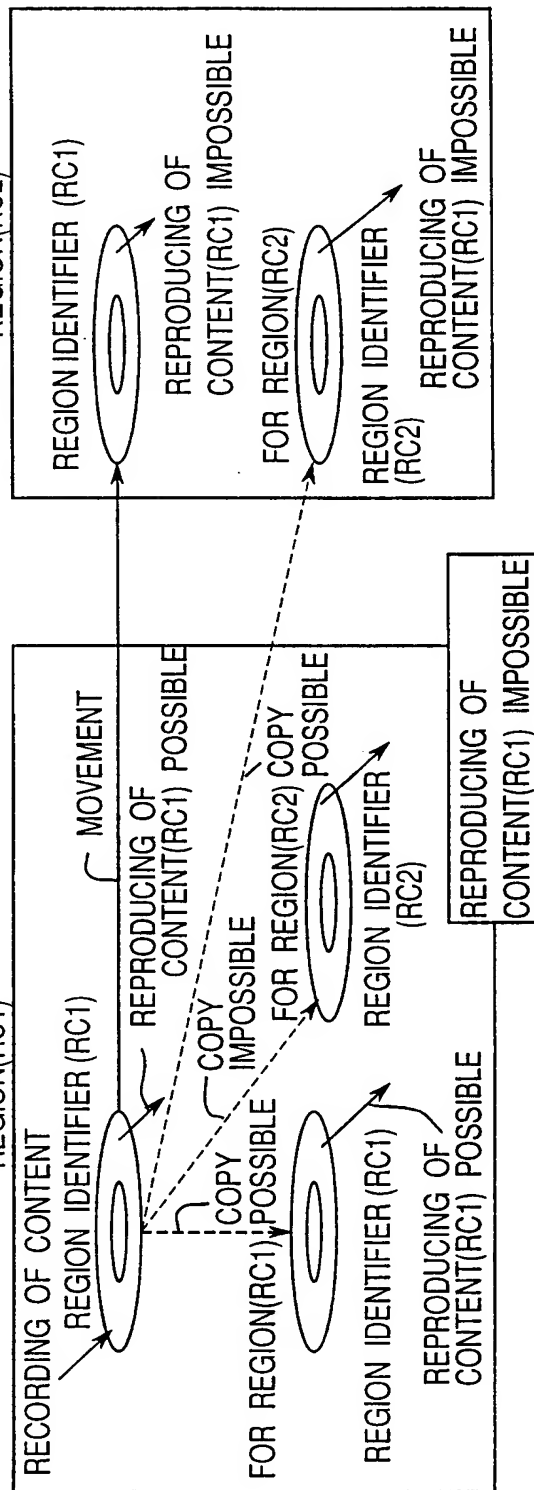

*Fig. 16*

## THIRD PREFERRED EMBODIMENT

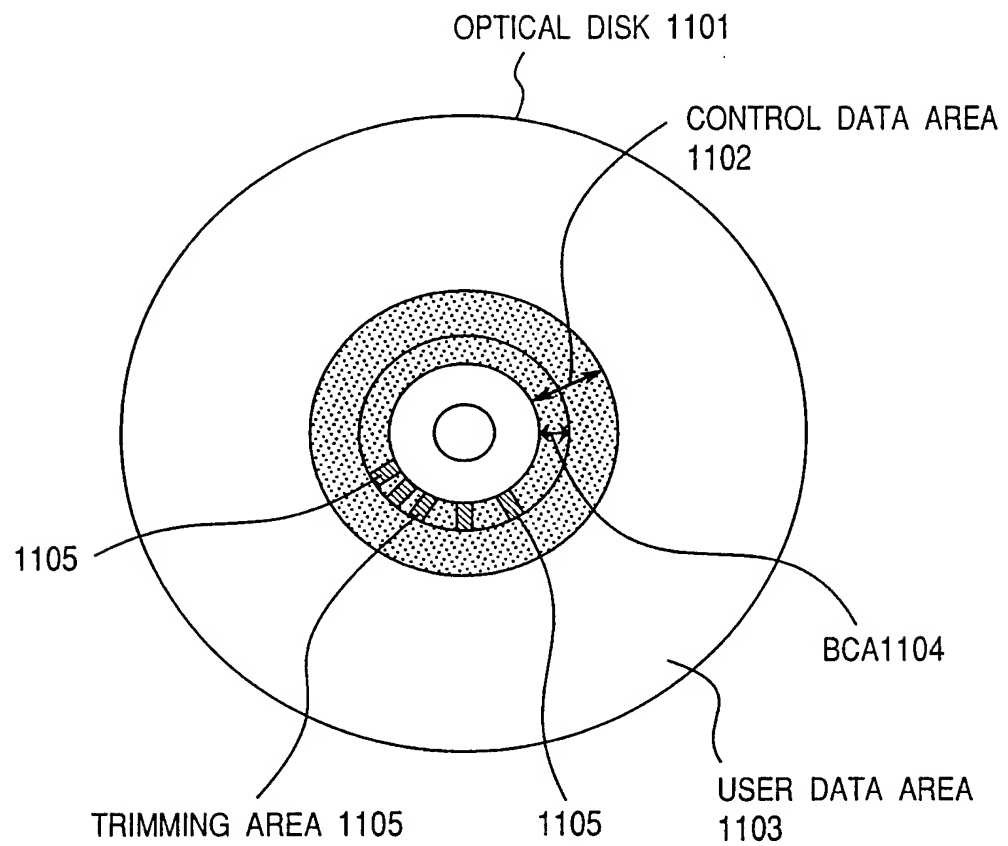


Fig.17

REPRODUCED SIGNAL WAVEFORM OF BCA REPRODUCING CIRCUIT 1401


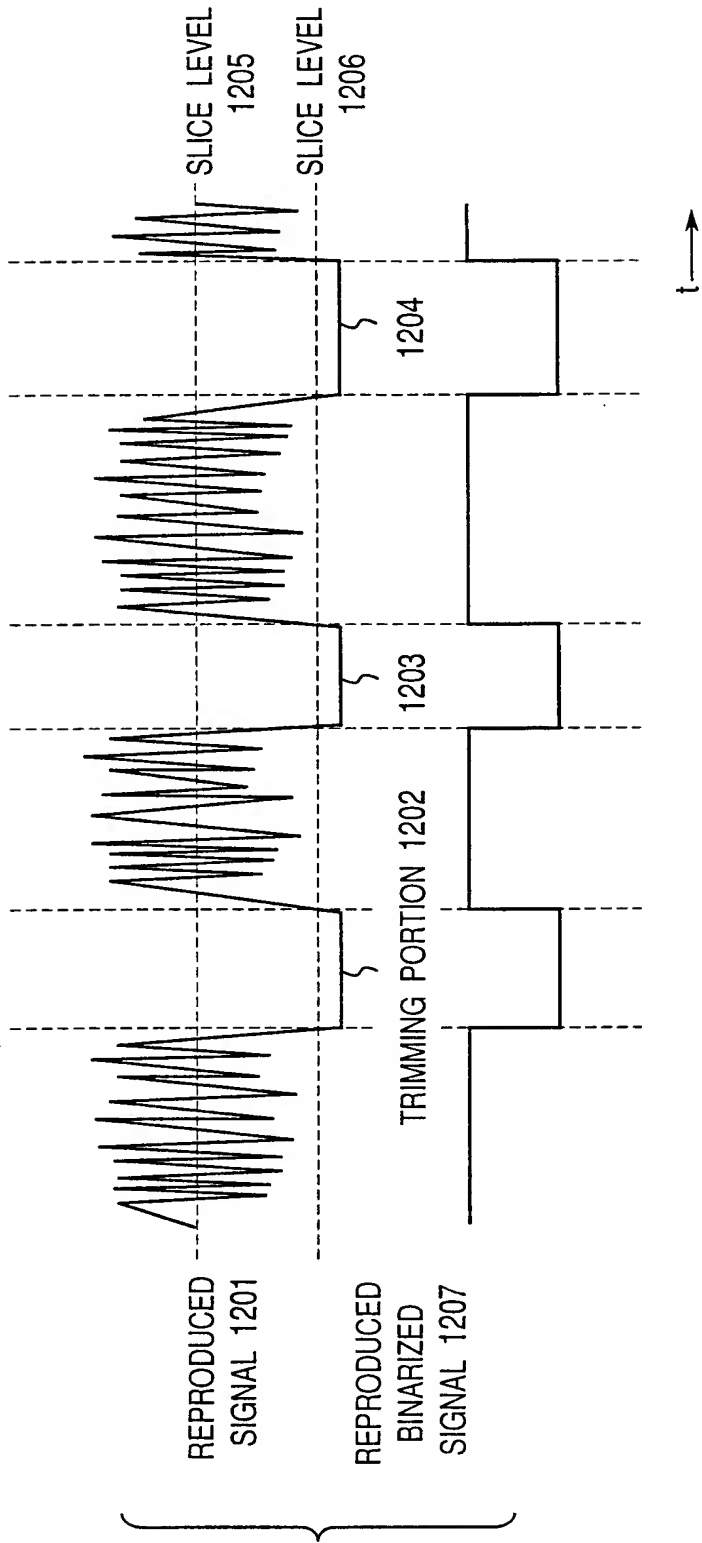


Fig.18

BCA REPRODUCING CIRCUIT 1401

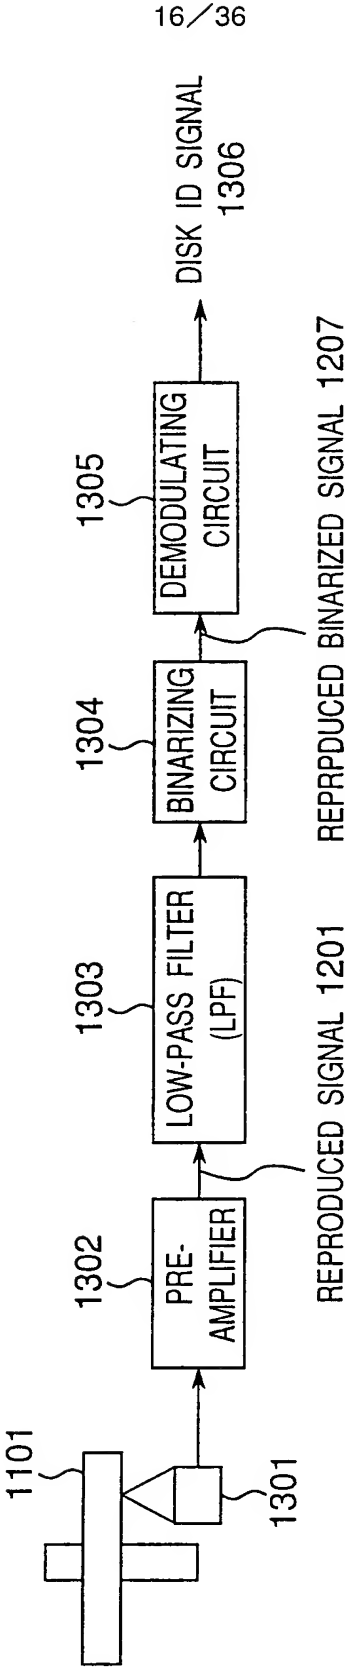

17/36

Fig. 19


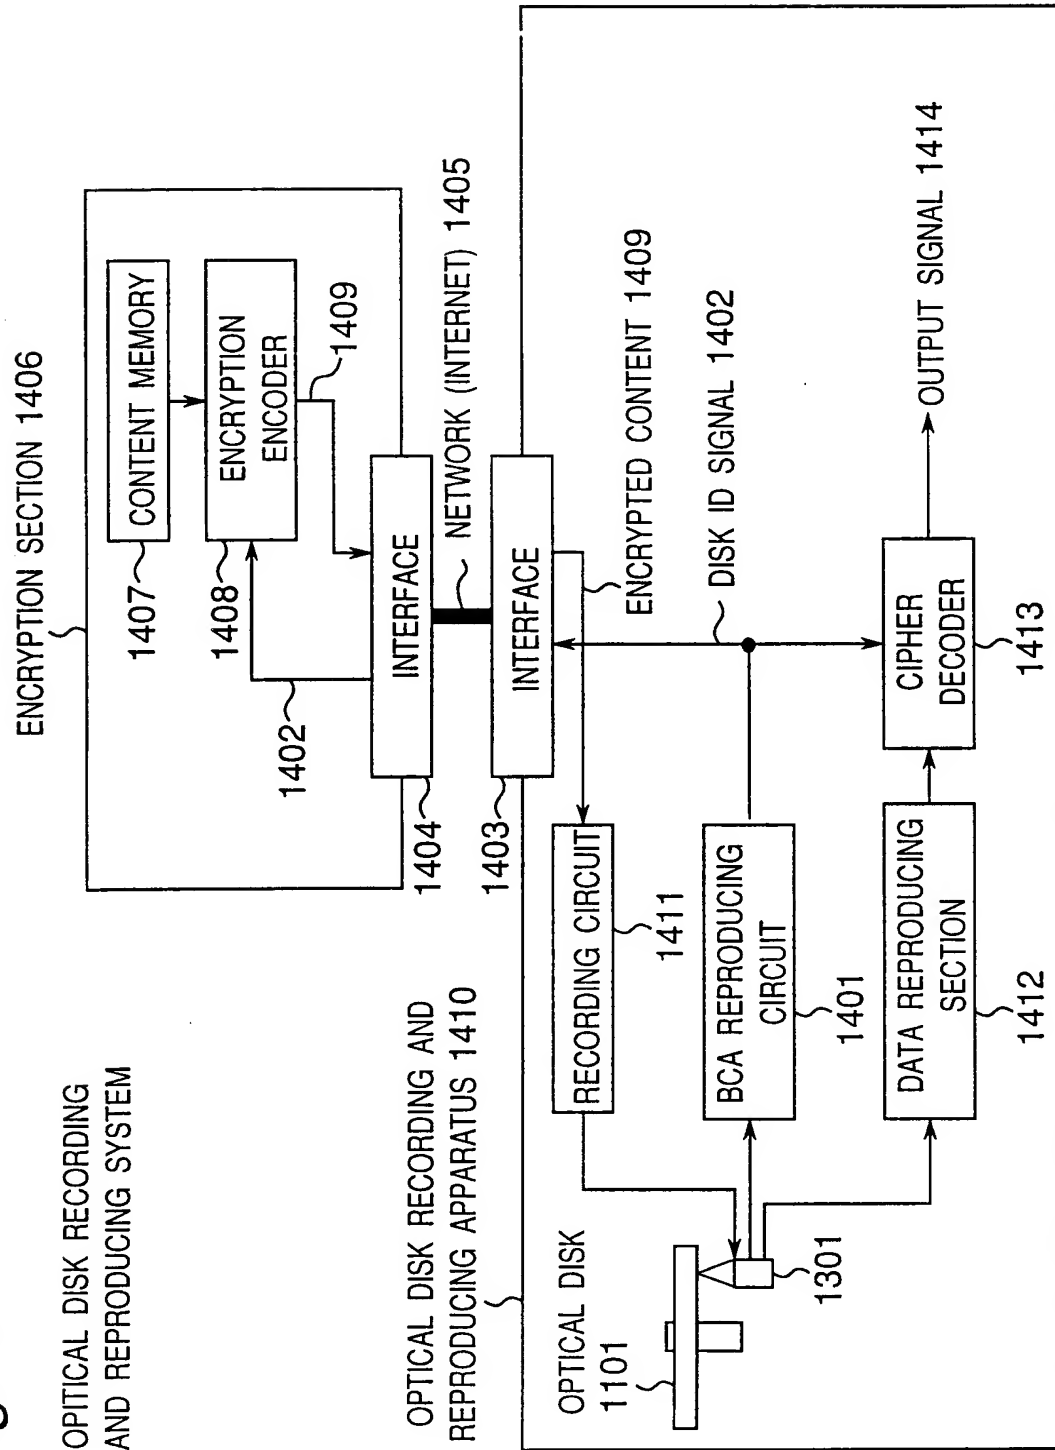
OPTICAL DISK RECORDING  
AND REPRODUCING SYSTEM

Fig.20

FOURTH PREFERRED EMBODIMENT  
OPTICAL DISK RECORDING AND REPRODUCING SYSTEM  
CATV COMPANY APPARATUS 1501

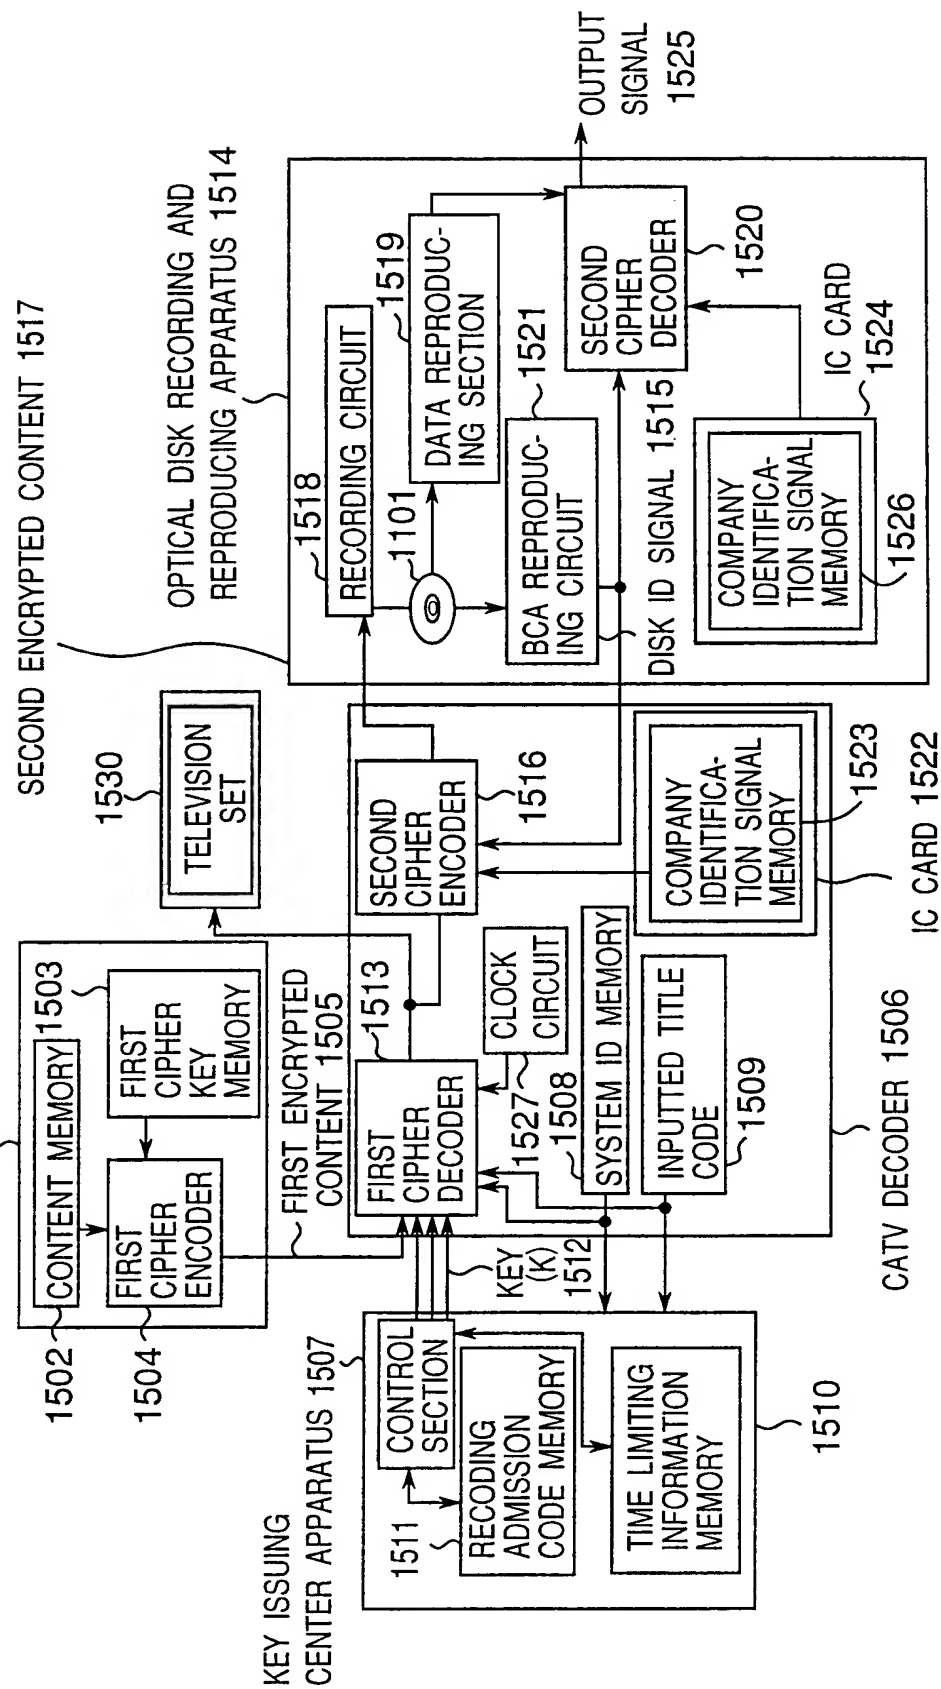

*Fig.21*

## FIFTH PREFERRED EMBODIMENT

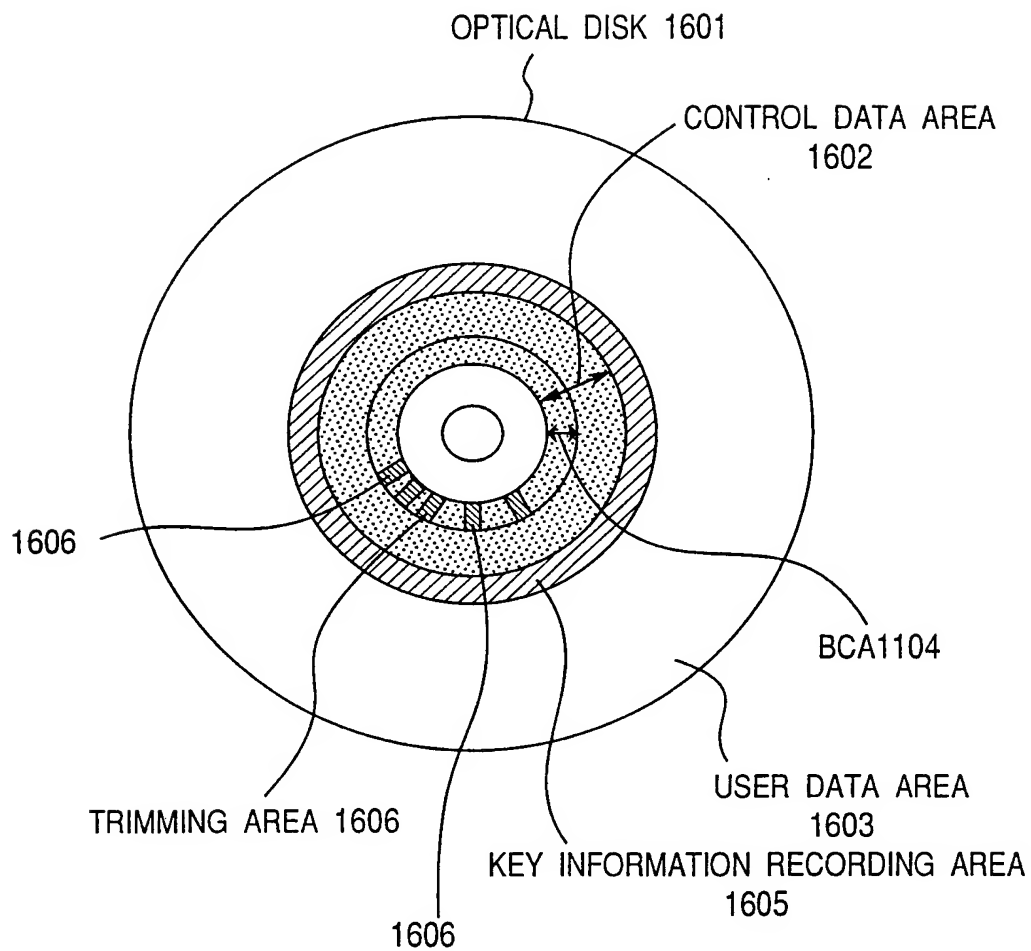


Fig.22

FIFTH PREFERRED EMBODIMENT  
OPTICAL DISK RECORDING AND REPRODUCING SYSTEM  
CATV COMPANY APPARATUS 1701

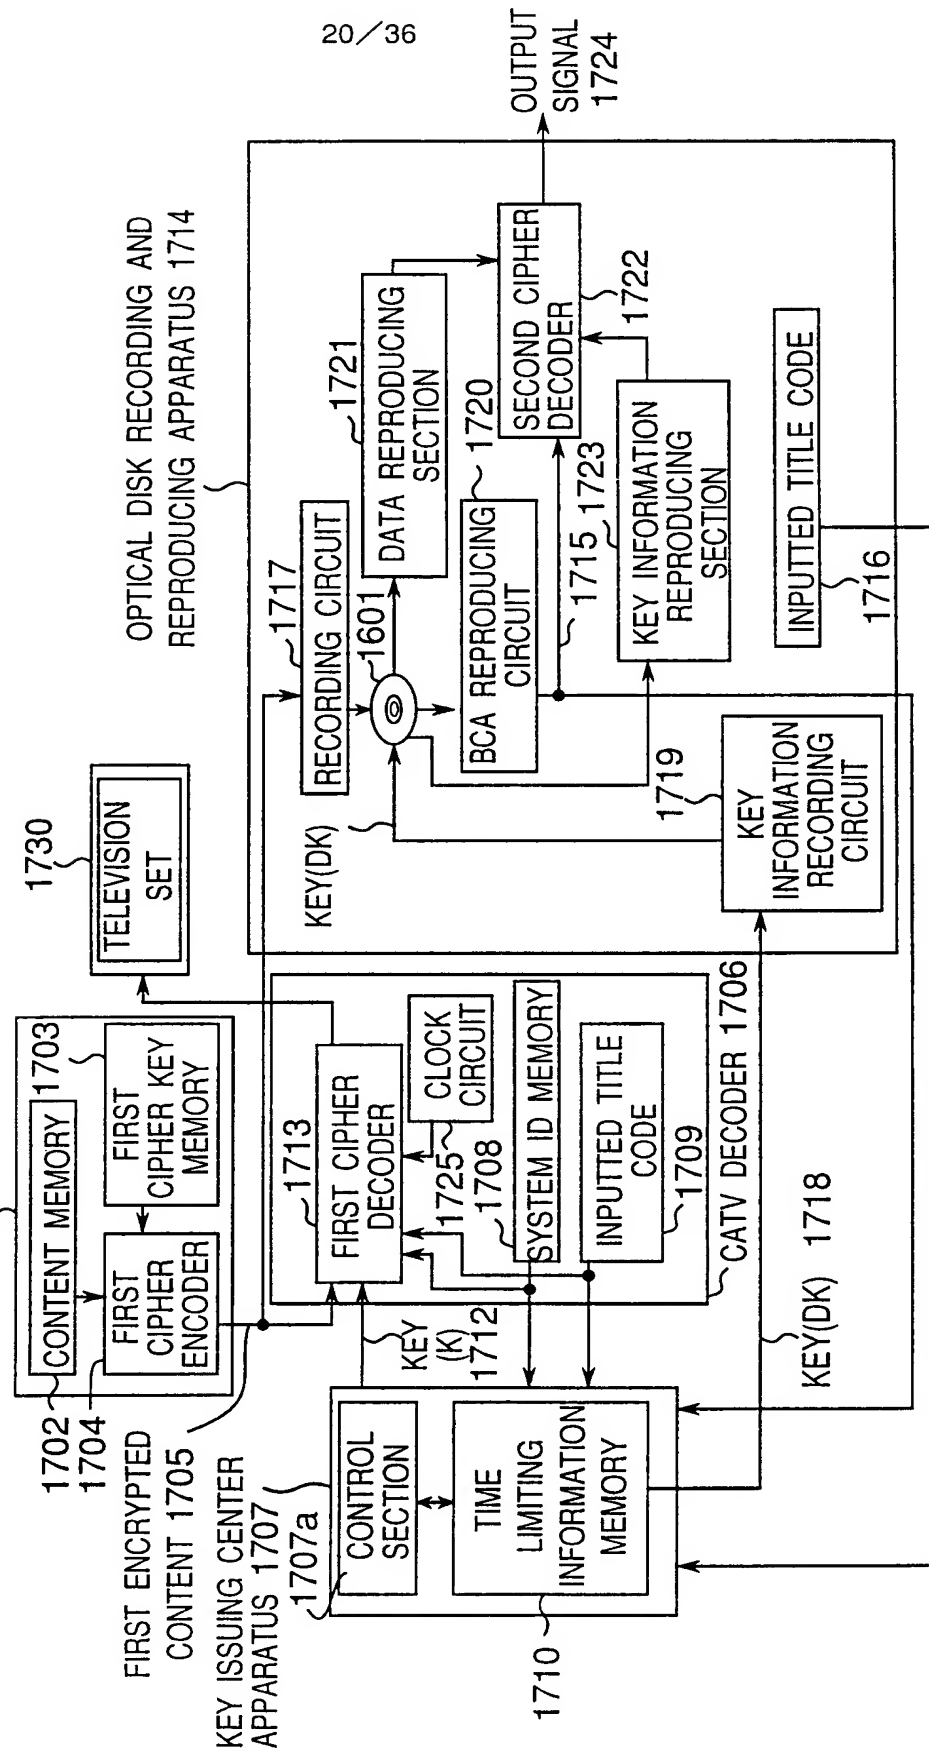




Fig.23


TABLE WITH ID



TITLE CODE T	T1	T2	T3
FIRST DECIPHER KEY FK	FK1	FK2	FK3
TIME LIMITING INFORMATION TIME	TIME1	TIME2	TIME3
SYSTEM ID	DID1	K11	K12
	DID2	K21	K22
	DID3	K23	K32
DISK ID	BCAS1	DK11	DK12
	BCAS2	DK21	DK22
	BCAS3	DK31	DK32
			DK33

*Fig.24*

MODIFIED THIRD PREFERRED EMBODIMENT

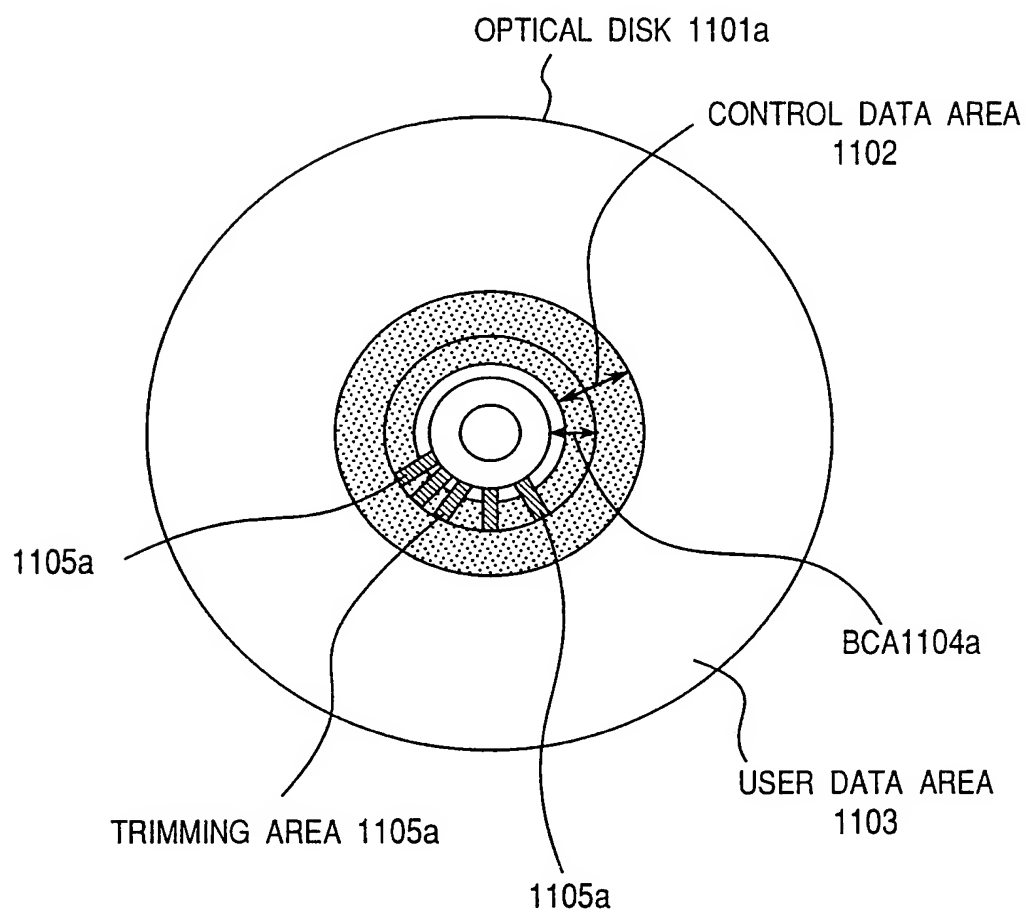

*Fig.25*

## MODIFIED FIFTH PREFERRED EMBODIMENT

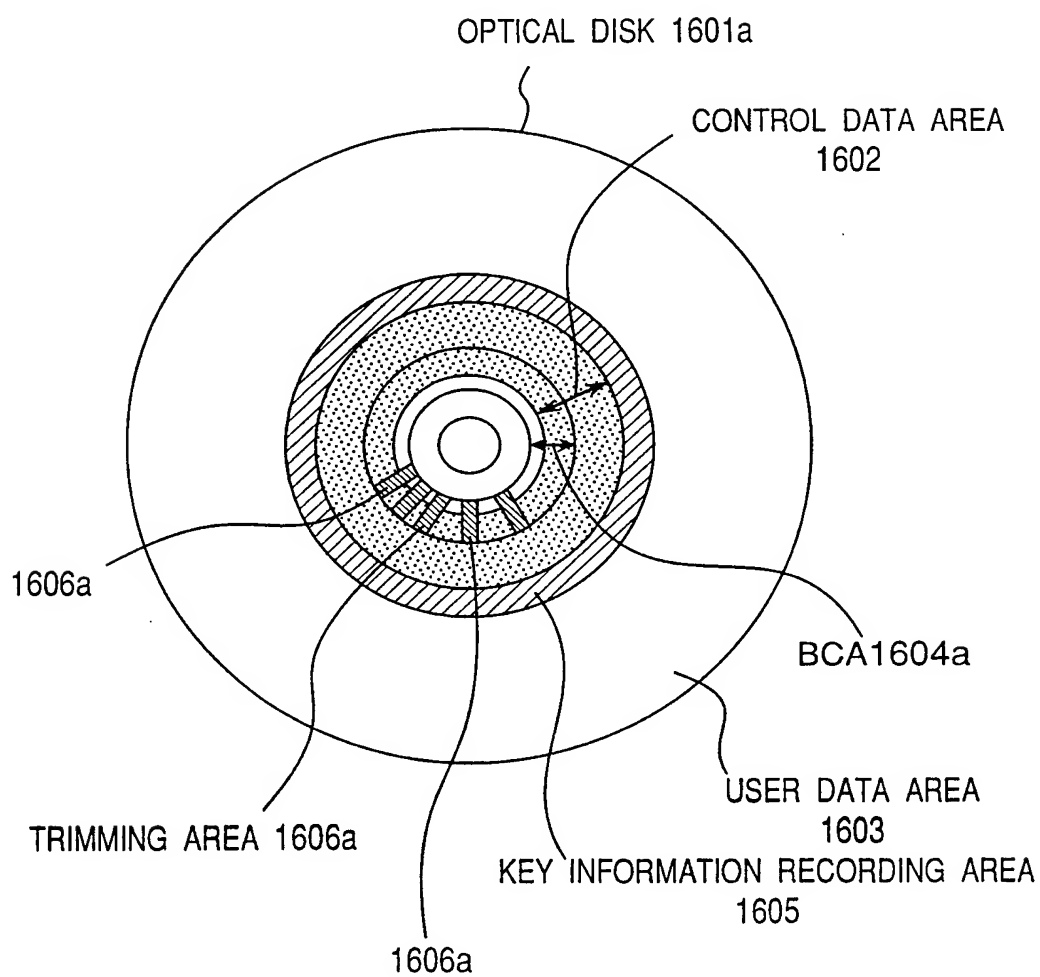


Fig.26




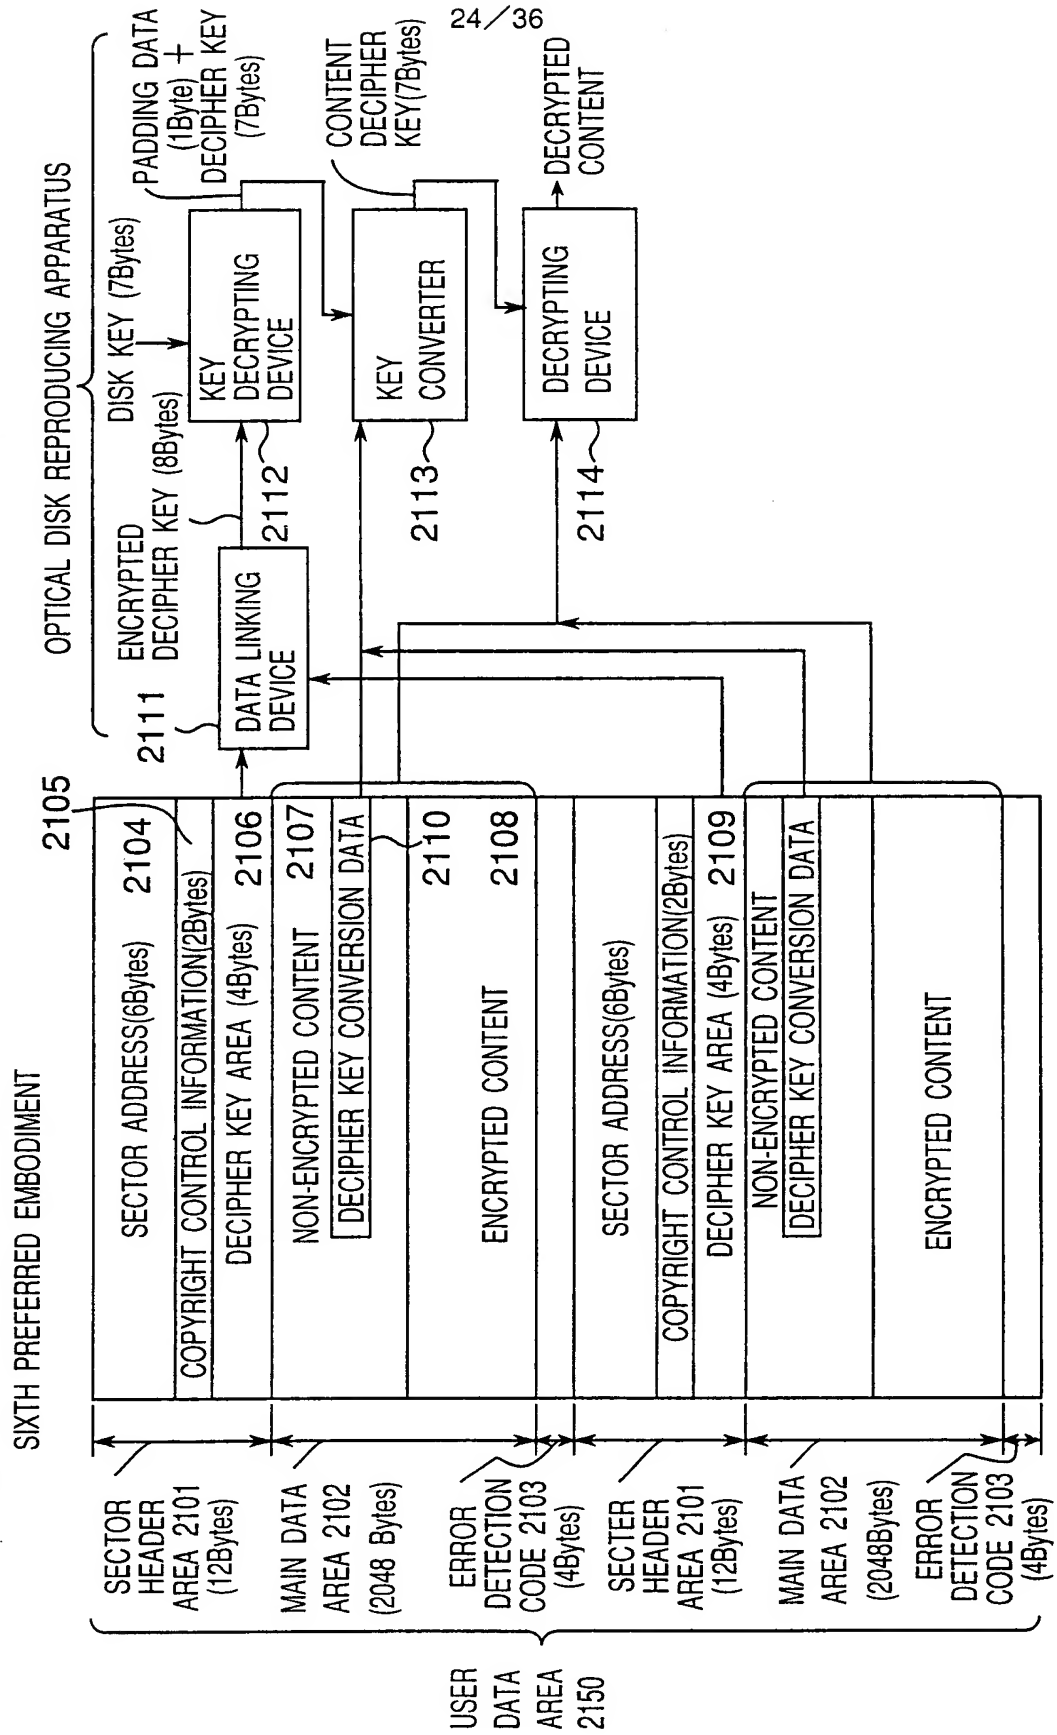


Fig.27

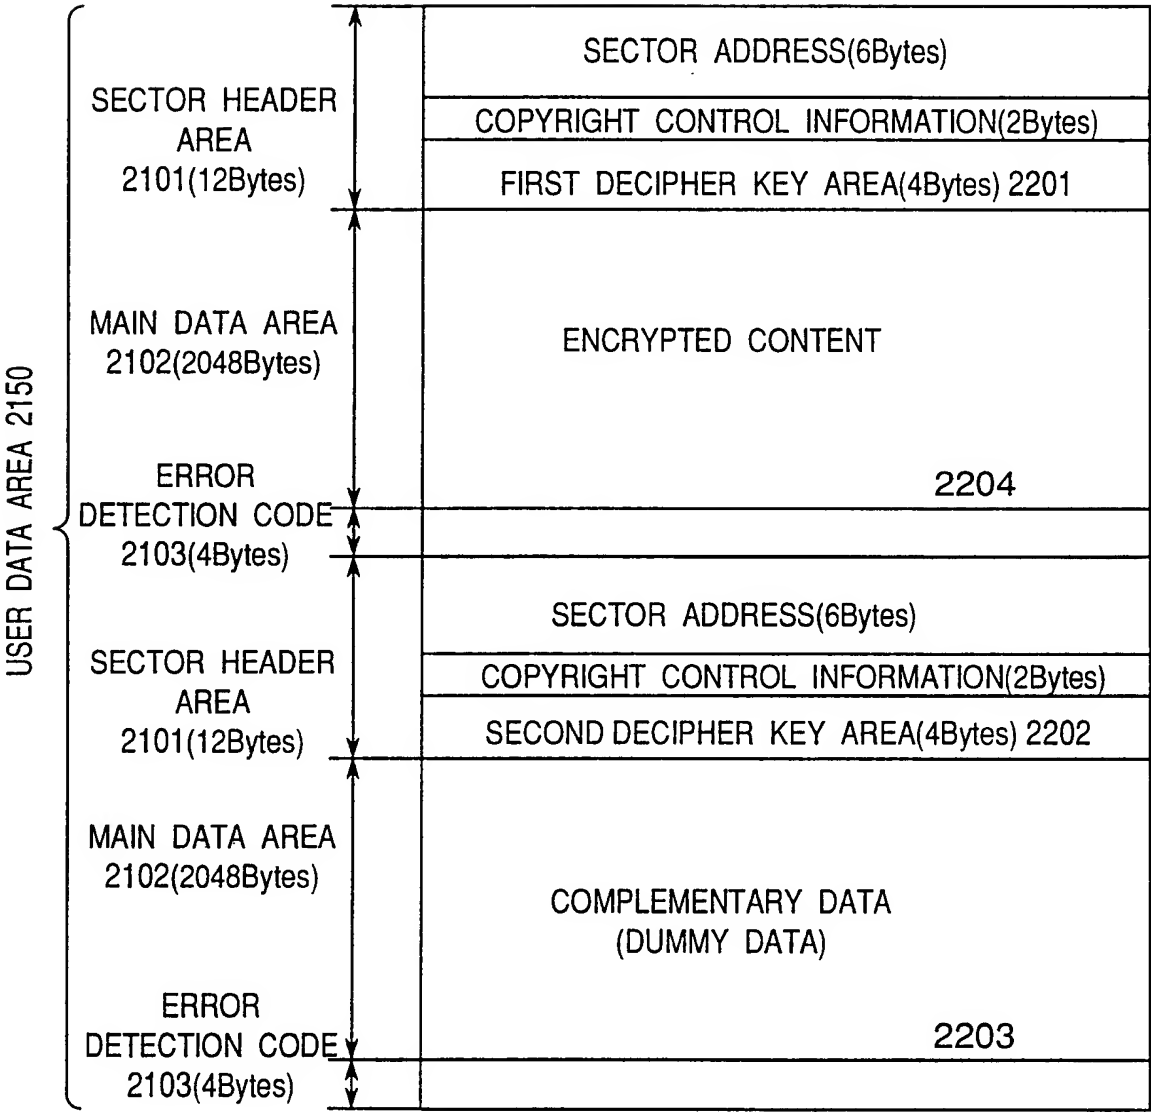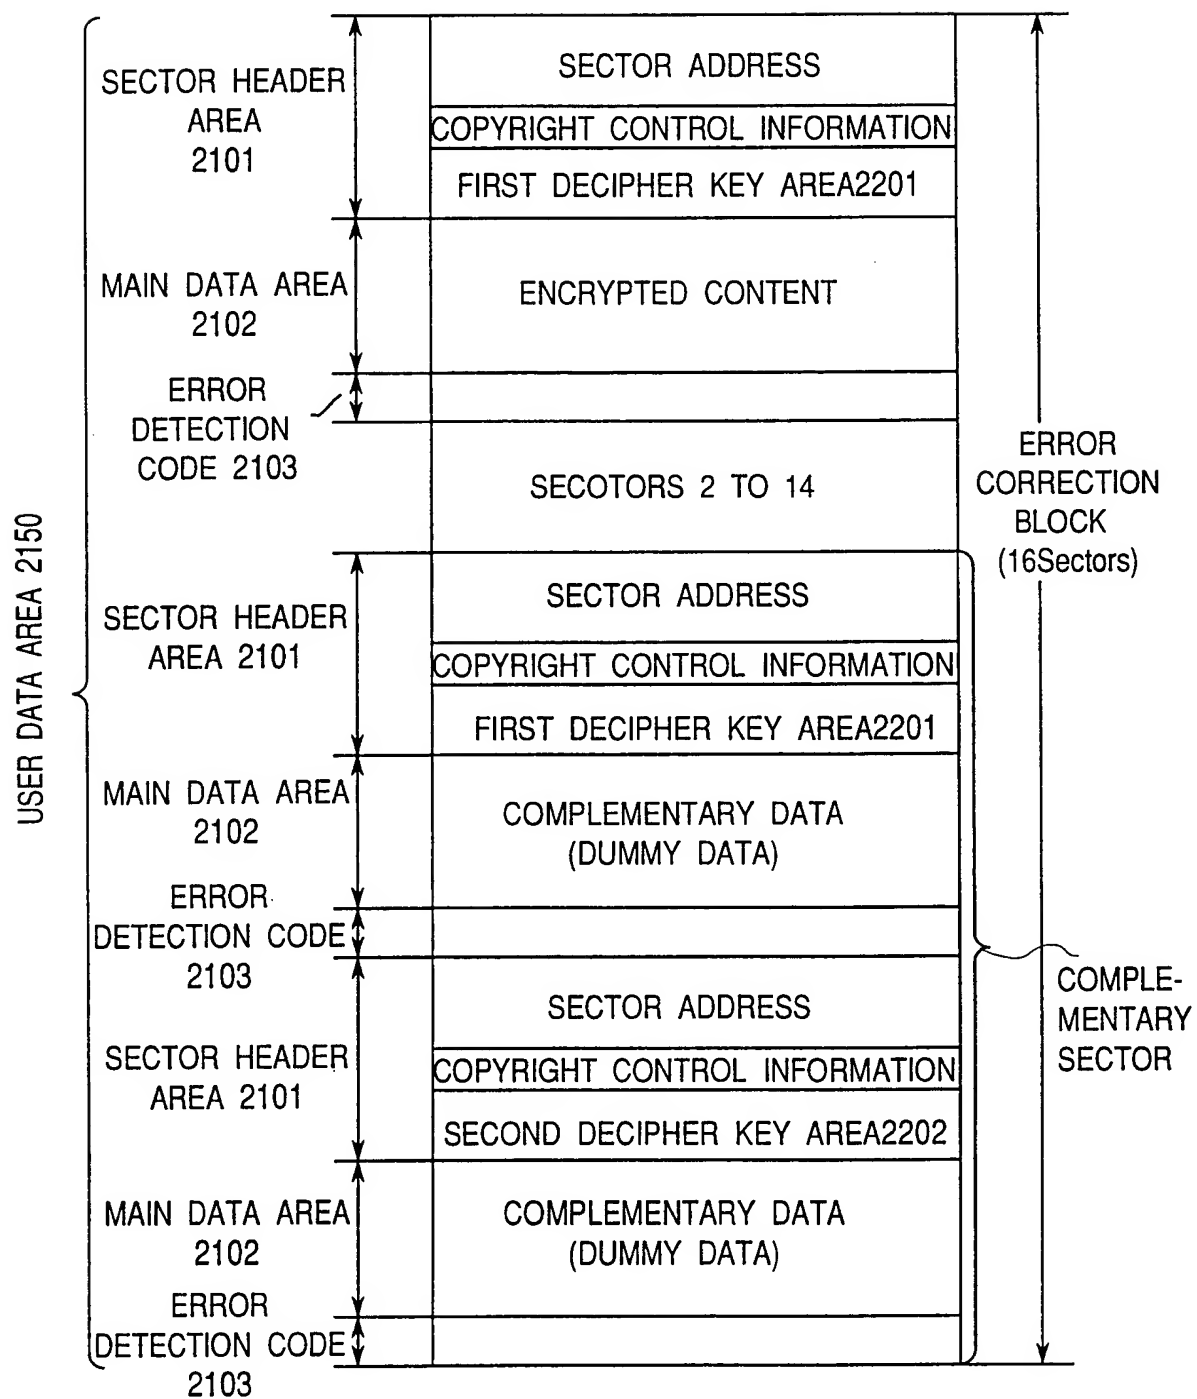

26/36

*Fig.28*

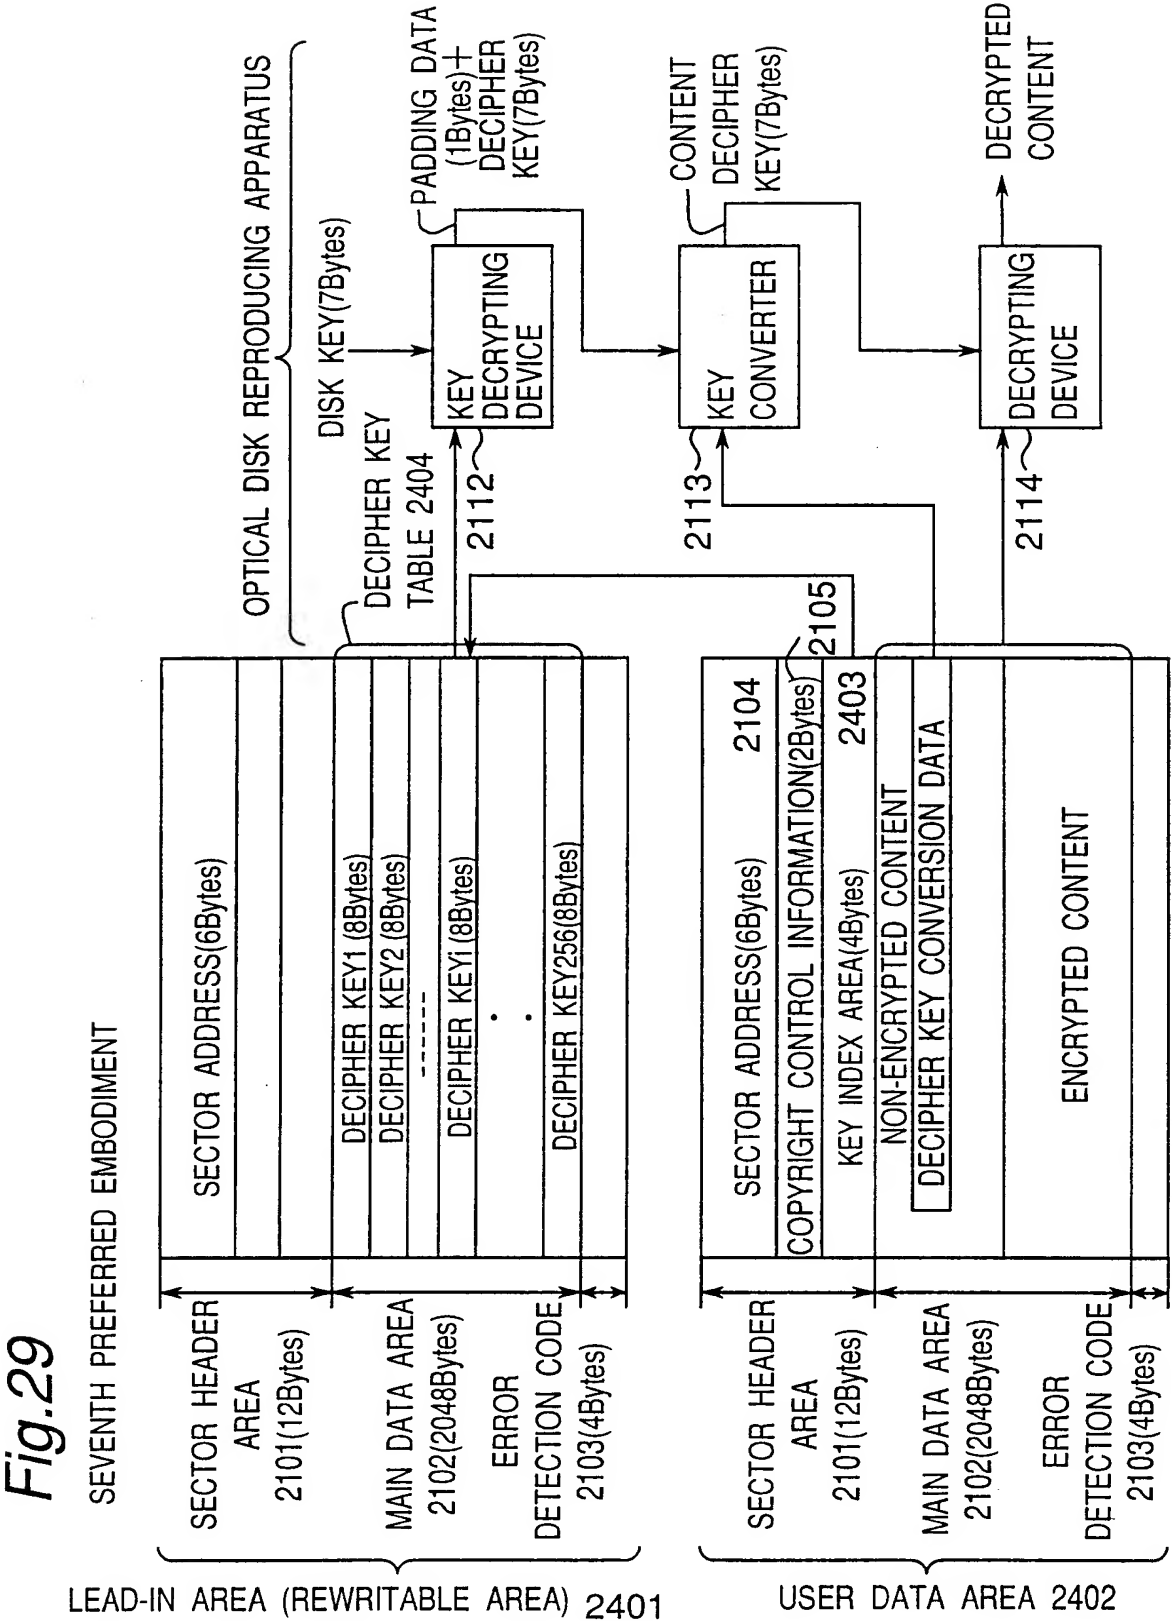


LEAD-IN AREA (REWITABLE AREA) 2401

USER DATA AREA 2402

Fig.30A

REPRESENTATION OF NON-RECORDED STATUS WITH INITIAL VALUE OF DECIPHER KEY

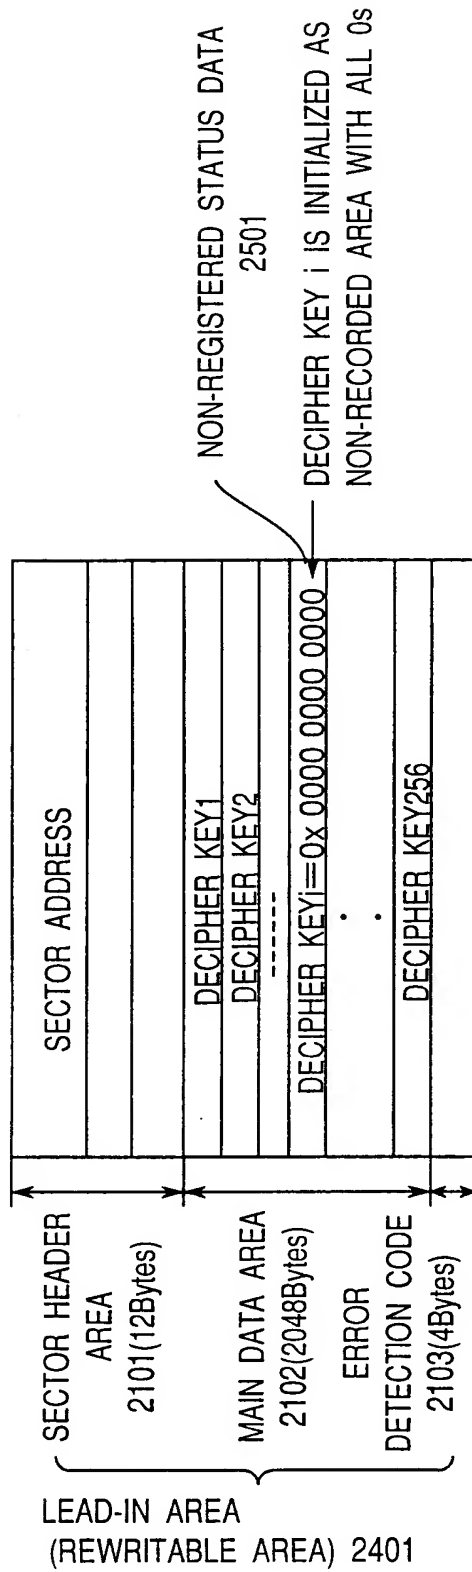

28 / 36

Fig.30B

REPRESENTATION OF RECORDED STATUS WITH DECIPHER KEY STATUS TABLE

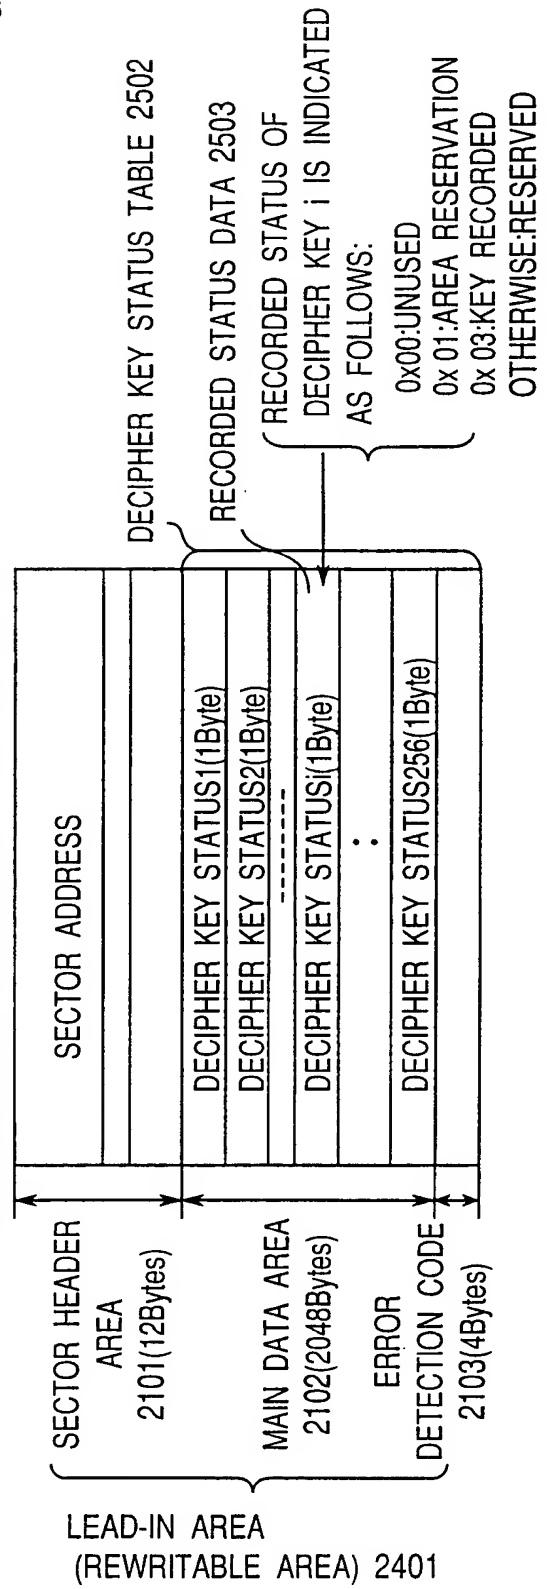




Fig.31



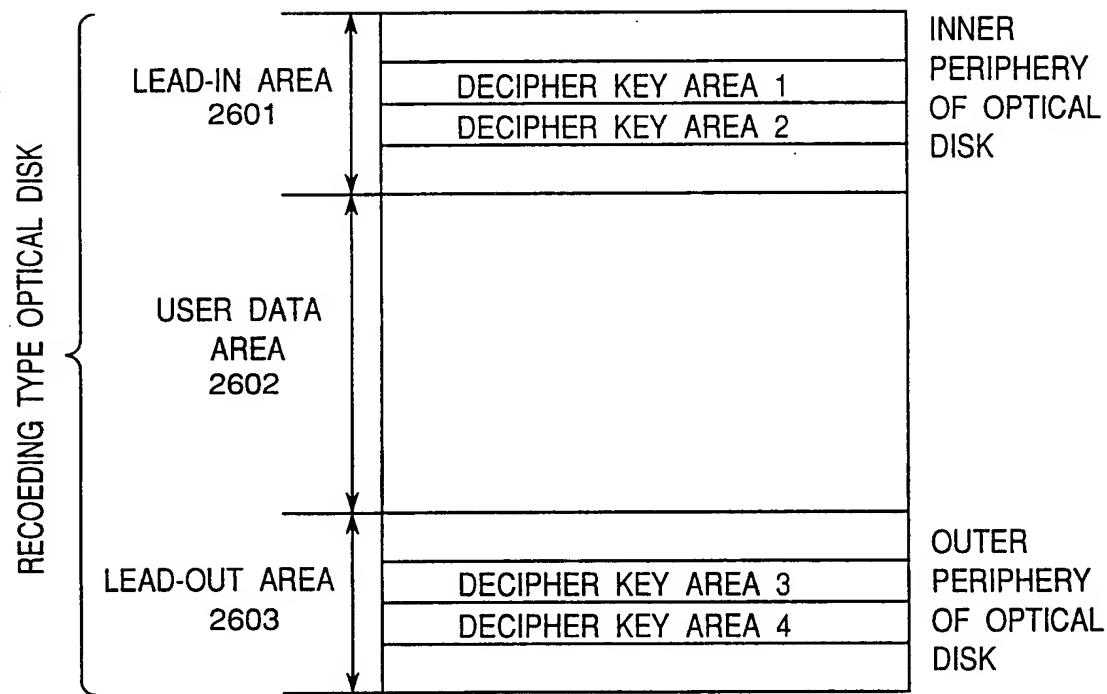


Fig.32

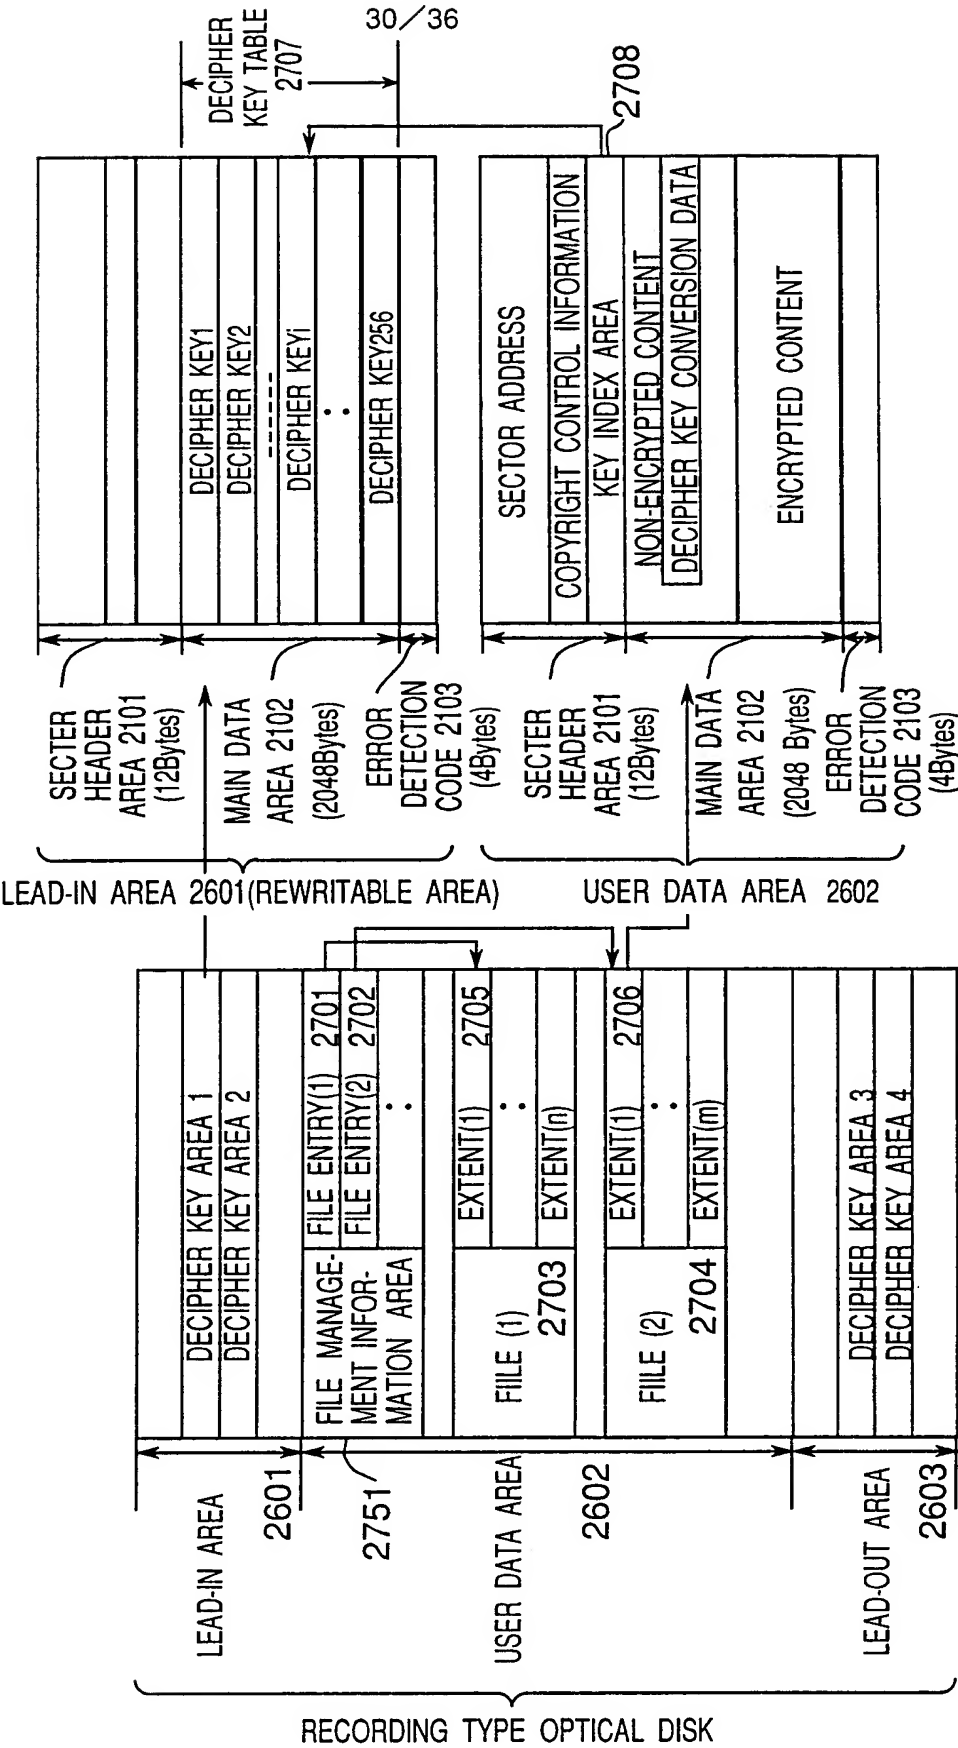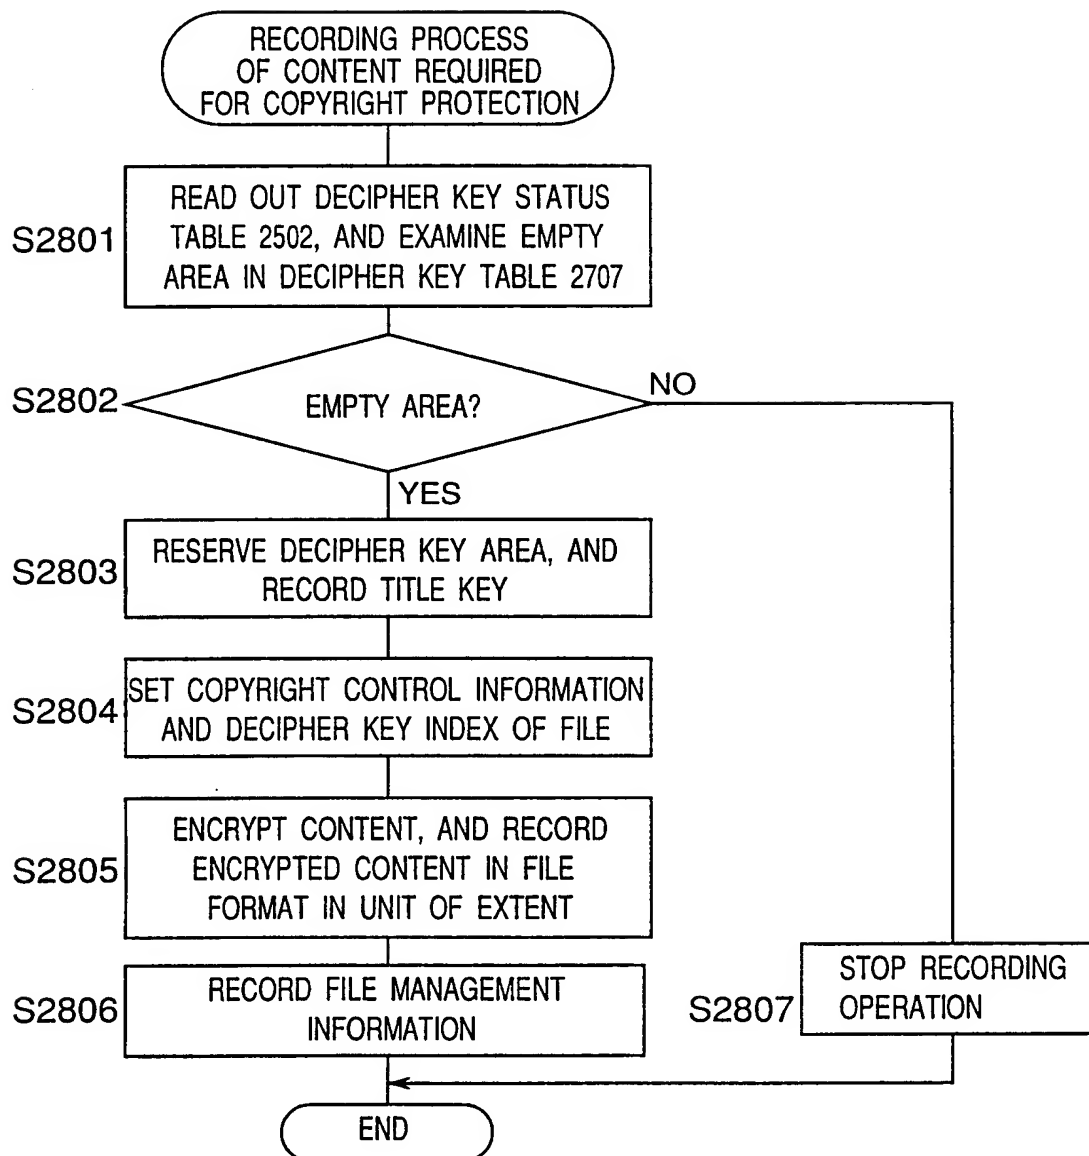

*Fig.33*

32/36

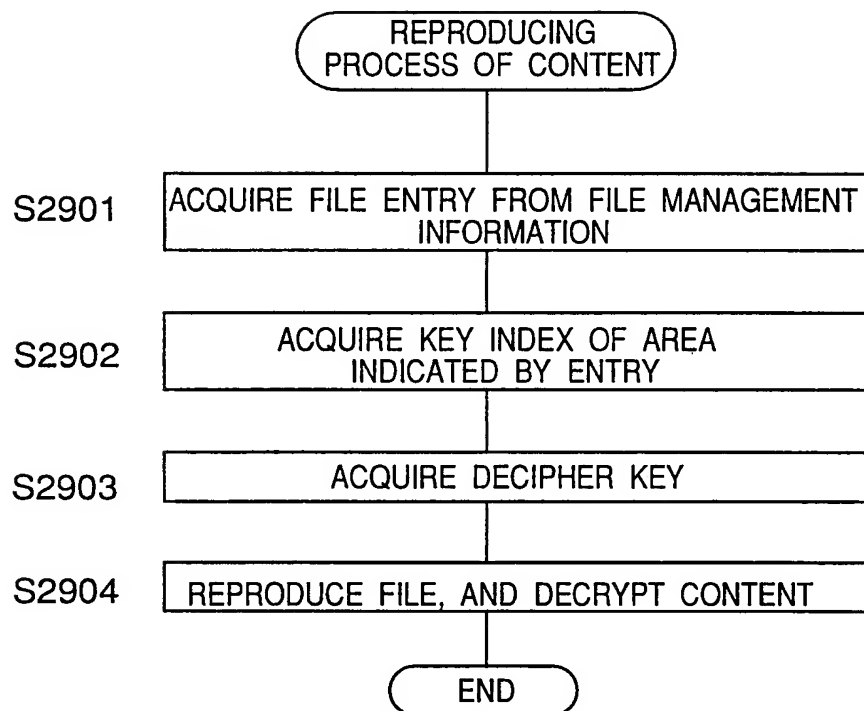
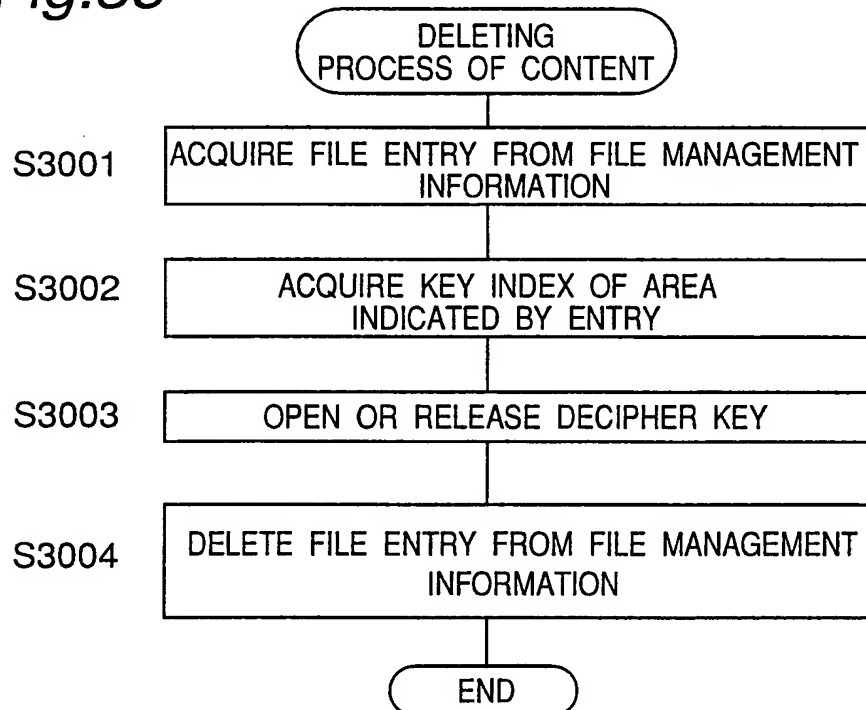
*Fig.34**Fig.35*

Fig. 36

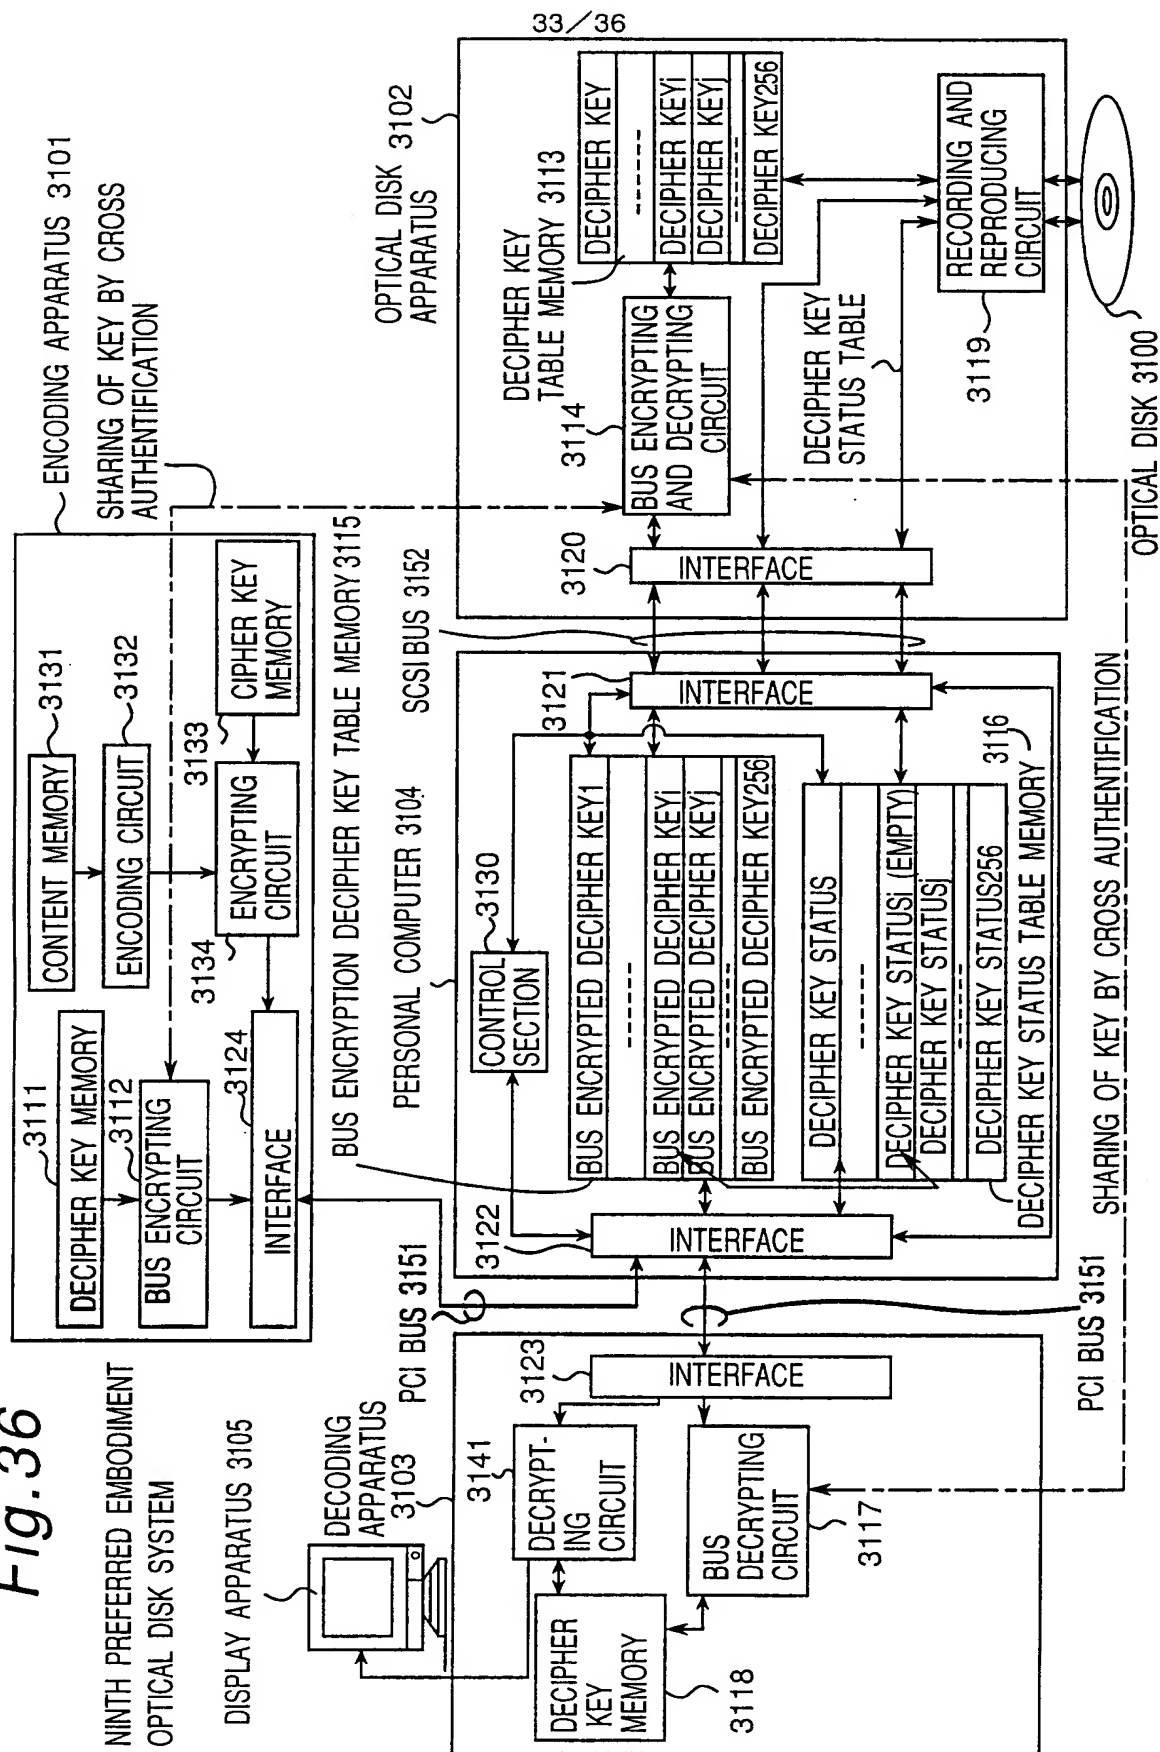


Fig.37

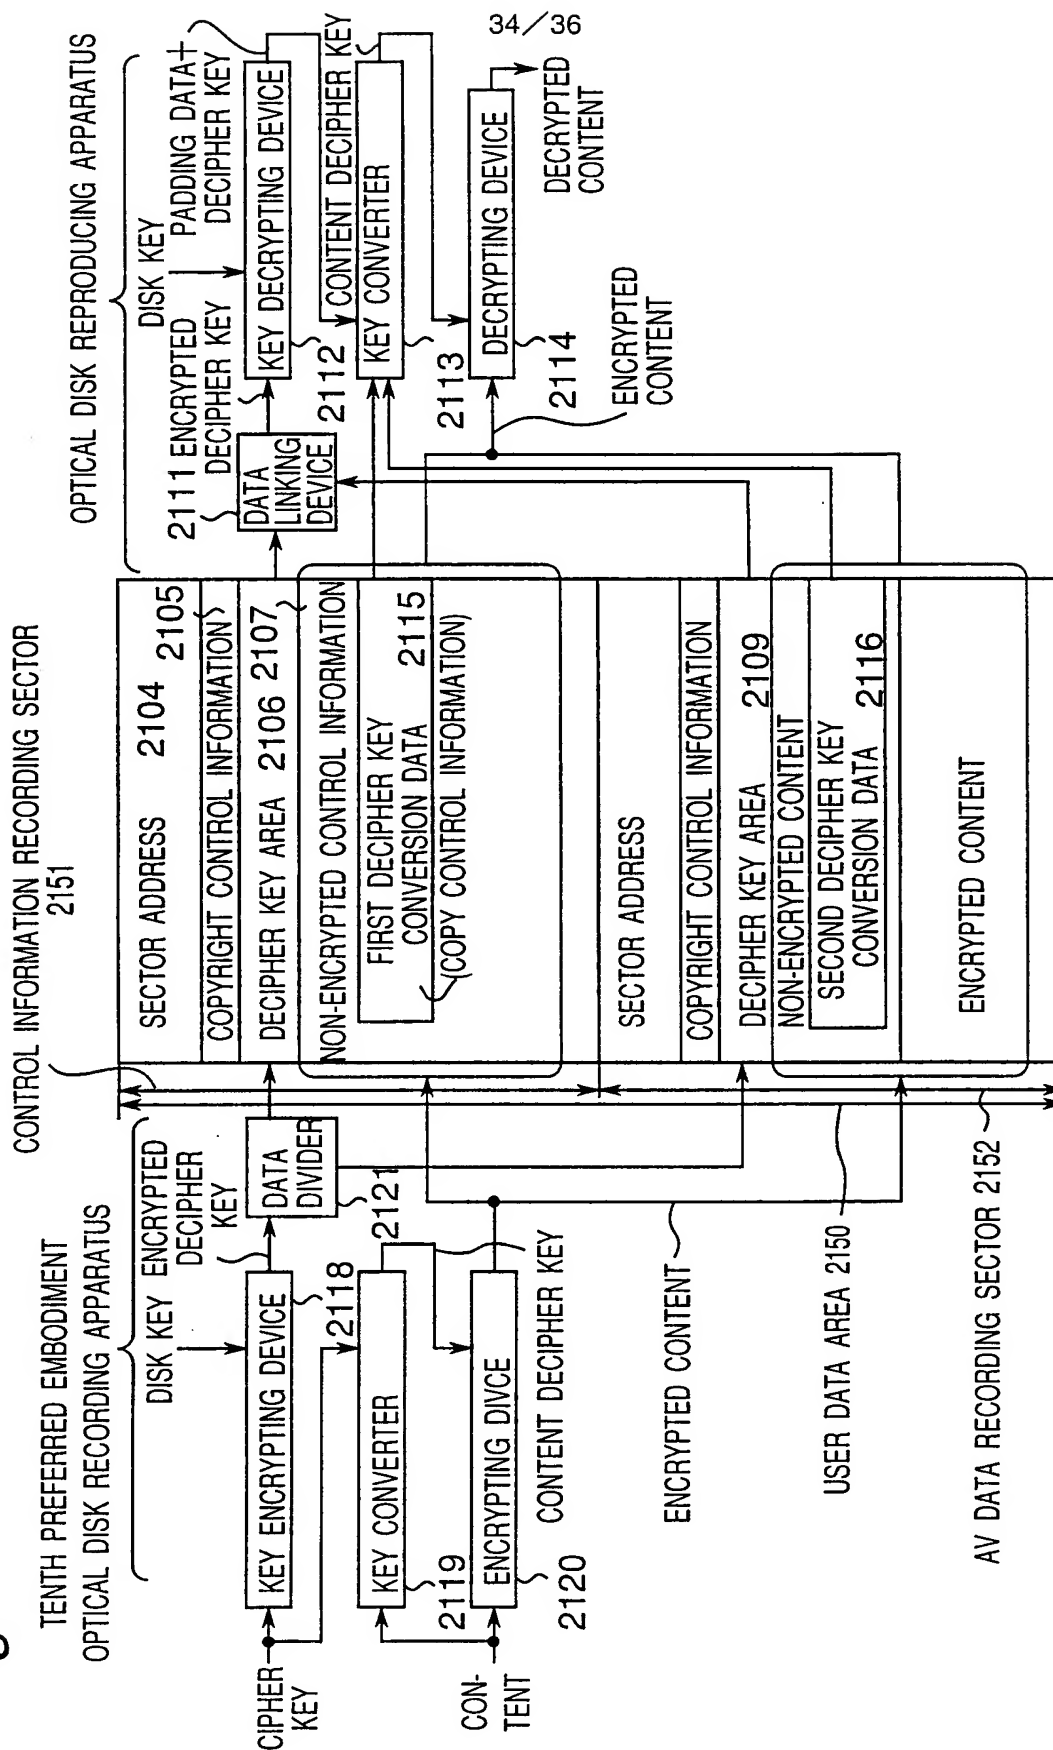


Fig.38


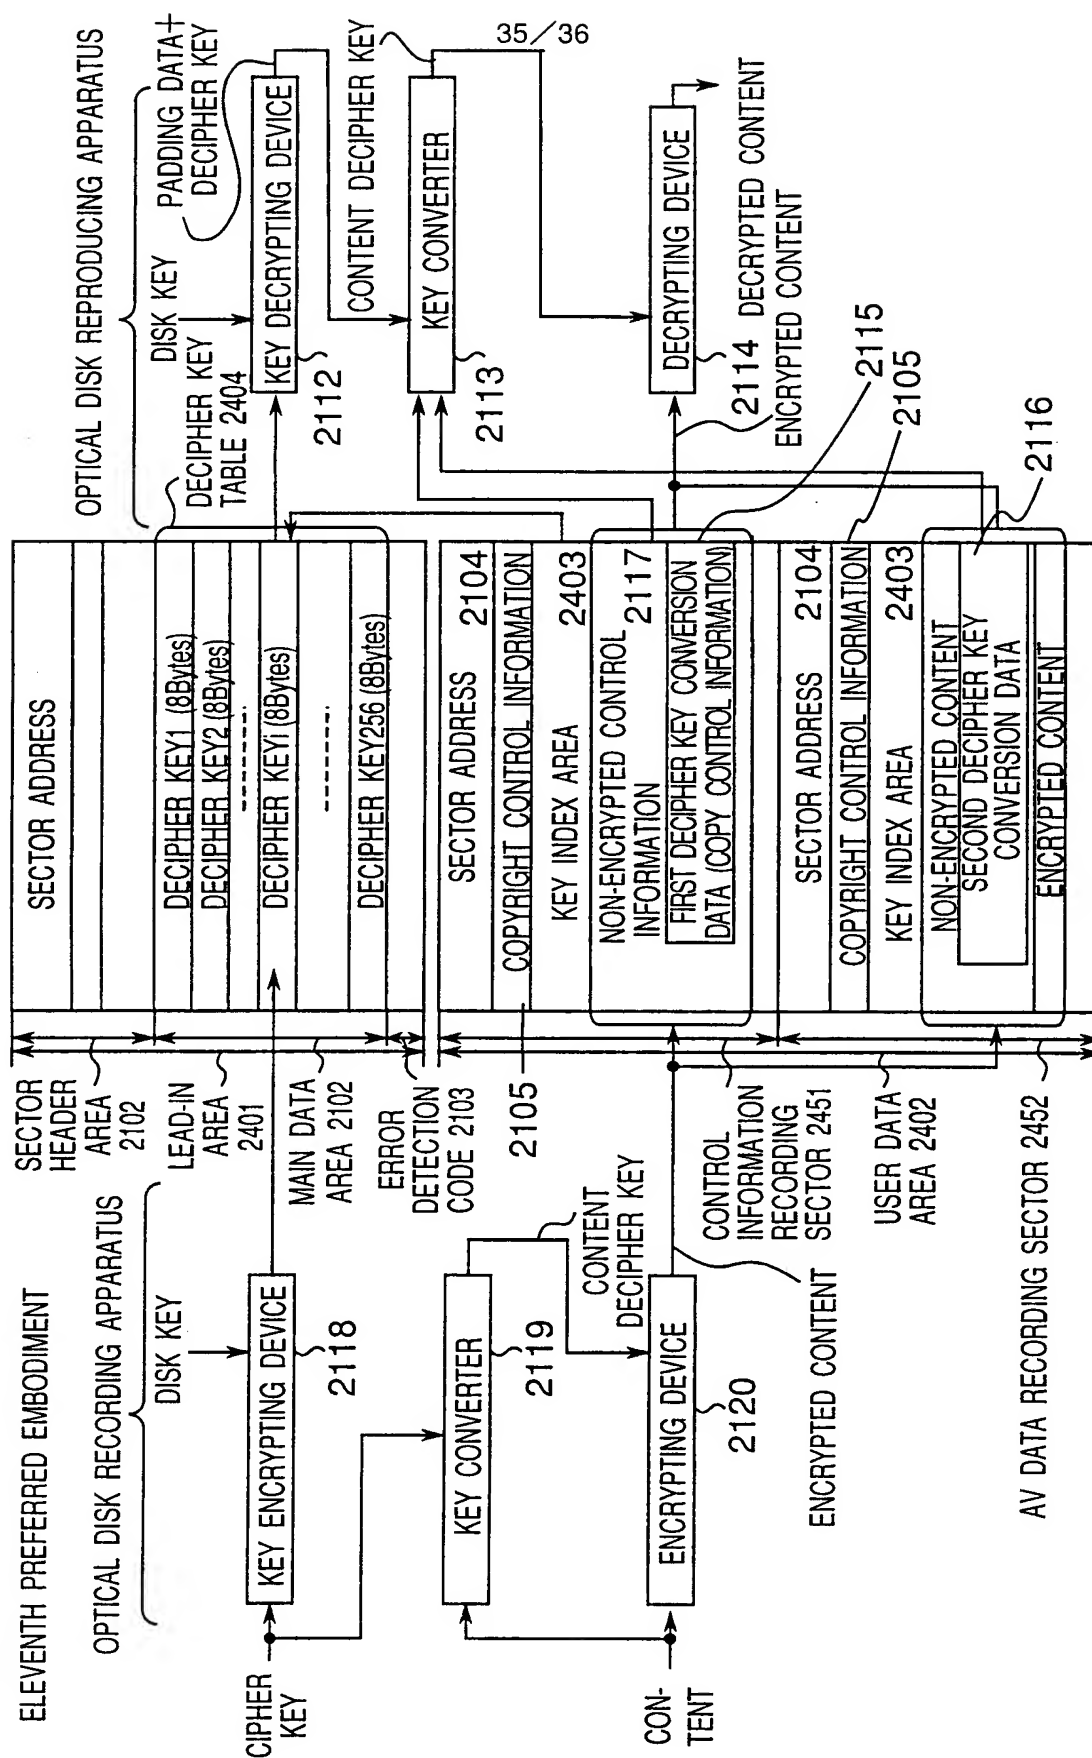


Fig.39 PRIOR ART





(19) World Intellectual Property Organization  
International Bureau

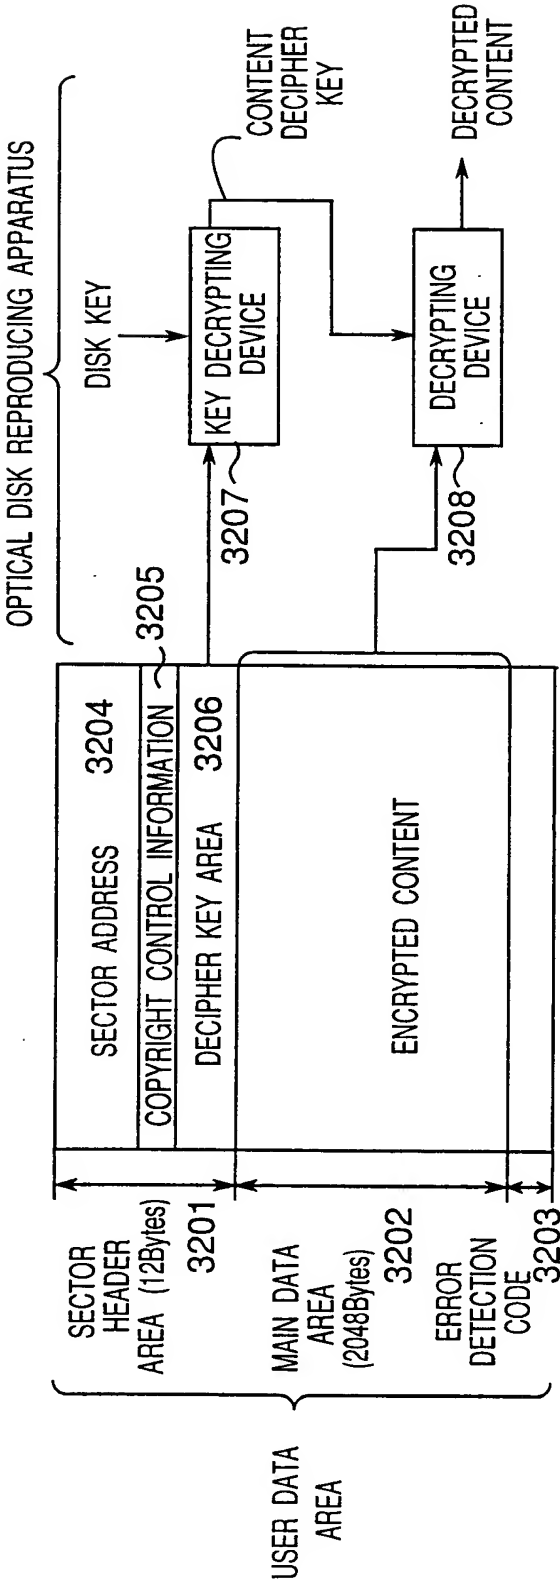

(43) International Publication Date  
9 November 2000 (09.11.2000)

PCT

(10) International Publication Number  
**WO 00/67257 A3**

(51) International Patent Classification<sup>7</sup>: **G11B 20/00**,  
7/007, 23/28, G06F 1/00

(21) International Application Number: PCT/JP00/02750

(22) International Filing Date: 27 April 2000 (27.04.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/122104 28 April 1999 (28.04.1999) JP  
11/128197 10 May 1999 (10.05.1999) JP  
11/299635 21 October 1999 (21.10.1999) JP

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventors: **NAGAI, Takahiro**; 301, Mezon Higashinoda-cho 4-23, Higashinoda-cho 4-chome, Miyakojima-ku, Osaka-shi, Osaka 534-0024 (JP). **ISHIHARA, Hideshi**;

10-120, Ikuno 1-chome, Katano-shi, Osaka 576-0054 (JP). **TAKAGI, Yuji**; 2-29-1-309, Deguchi, Hirakata-shi, Osaka 573-0065 (JP). **YUMIBA, Takashi**; 606, Bervi Nishiura, 58, Kowata-nishiura, Uji-shi, Kyoto 611-0002 (JP). **SHOJI, Mamoru**; 3-13-4-805, Mozu-umemachi, Sakai-shi, Osaka 591-8032 (JP). **OSHIMA, Mitsuaki**; 115-3, Katsura-minamitatsumi-cho, Nishikyo-ku, Kyoto-shi, Kyoto 615-8074 (JP). **OHARA, Shunji**; 221-5, Shinjo, Higashiosaka-shi, Osaka 578-0963 (JP). **ITO, Motoshi**; 17-25-302, Furuichi 3-chome, Joto-ku, Osaka-shi, Osaka 536-0001 (JP). **ISHIDA, Takashi**; 13-14, Hashimoto-isoku, Yawata-shi, Kyoto 614-8331 (JP). **NAKAMURA, Atsushi**; Syoukouryo, 25-3, Mido-cho, Kadoma-shi, Osaka 571-0064 (JP). **JAHANA, Tadashi**; 202, Dai-5 Mine Haitsu, 836-6, Kamoi, Midori-ku, Yokohama-shi, Kanagawa 226-0003 (JP). **NAKATA, Kouhei**; B305, Eminensu Marunouchi, 13-15, Marunouchi-cho, Kawanishi-shi, Hyogo 666-0003 (JP).


(74) Agents: **AOYAMA, Tamotsu et al.**; Aoyama & Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).

(81) Designated States (*national*): CN, KR.

[Continued on next page]

(54) Title: OPTICAL DISK, OPTICAL DISK RECORDING AND REPRODUCING APPARATUS, METHOD FOR RECORDING, REPRODUCING AND DELETING DATA ON OPTICAL DISK, AND INFORMATION PROCESSING SYSTEM

FIRST PREFERRED EMBODIMENT

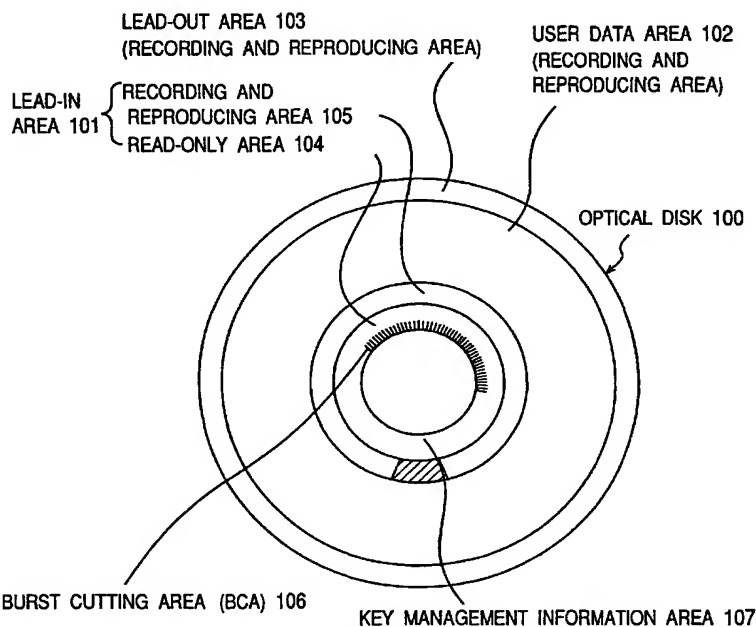

(57) Abstract: An optical disk of recording type on which data is recordable is provided which includes a data recording and reproducing area (102) for recording data therein and reproducing data therefrom, and a read-only disk identification information area (104) for recording disk identification information (107) for identifying the optical disk therein. In the optical disk, the disk identification information (107) is formed by removing a reflection film formed on the optical disk in a strip shape. The disk identification information (107) includes an inherent disk identifier for each optical disk, and the data recording and reproducing area includes an area for recording therein encrypted data, which is encrypted using information including the disk identification information for identifying the optical disk as a key.



WO 00/67257 A3



**Published:**

— *With international search report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

26 April 2001

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/JP 00/02750

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B20/00 G11B7/007 G11B23/28 G06F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 58368 A (XIE JIANLEI ; THOMSON CONSUMER ELECTRONICS (US)) 23 December 1998 (1998-12-23) page 3, line 9 -page 5, line 25 figures 2,4 ---	1-3, 40-45
X,P	GB 2 332 977 A (SAMSUNG ELECTRONICS CO LTD) 7 July 1999 (1999-07-07) abstract page 2, line 31 -page 4, line 16 ---	1-3, 40-45
X	US 5 596 639 A (KIKINIS DAN) 21 January 1997 (1997-01-21) column 3, line 37 - line 54 column 4, line 37 - line 60 --- -/--	1,4,6, 40,43

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

22 December 2000

Date of mailing of the international search report

12. 01. 2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schiwy-Rausch, G

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No

PCT/JP 00/02750

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 442 566 A (PHILIPS NV) 21 August 1991 (1991-08-21) column 5, line 43 -column 6, line 12 claim 1 ---	1
X	US 5 752 009 A (NAKAHARA MASARU ET AL) 12 May 1998 (1998-05-12) column 8, line 52 - line 61 ---	1-4,6,40
X,P	WO 00 21087 A (MATSUSHITA ELECTRIC IND CO LTD) 13 April 2000 (2000-04-13) page 6, line 25 -page 7, line 7 page 19, line 4 -page 20, line 4 page 24, line 9 -page 28, line 18 claims 1-5; figures 1,2A,2B ---	1,3-6,40
X,P	EP 0 984 346 A (HITACHI EUROP LTD) 8 March 2000 (2000-03-08) abstract column 4, line 22 -column 5, line 24 claims 1-5; figures 1,2 ---	1-3, 40-44
X	US 5 745 568 A (PEARCE JOHN J ET AL) 28 April 1998 (1998-04-28)	1,3-6, 13,14, 17,20, 23, 31-35, 70,71
A	abstract  column 1, line 50 -column 2, line 29 column 3, line 20 - line 28 column 3, line 57 -column 4, line 16 column 4, line 38 - line 54 column 6, line 4 - line 32 claims 1,2 --- -/--	12,28, 29,38, 39,72

# INTERNATIONAL SEARCH REPORT

Inv. No. Application No

PCT/JP 00/02750

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 802 527 A (MATSUSHITA ELECTRIC IND CO LTD) 22 October 1997 (1997-10-22)	1-8, 14, 17, 20, 21, 23, 24, 31-35, 40-45, 70, 71
Y	abstract	12, 26-29, 72
A	column 1, line 29 - line 53	13, 38, 46-53, 57-62, 65, 68, 69, 73
	column 3, line 10 - line 38 column 5, line 16 - column 10, line 33 column 11, line 22 - column 12, line 5 claims 1-10; figures 6-8	
X, P	EP 0 954 173 A (SANYO ELECTRIC CO) 3 November 1999 (1999-11-03)	8, 14, 15, 17, 18, 20, 23, 32-35, 70, 71
Y, P	column 3, line 24 - column 4, line 58	36-39
A, P	column 8, line 10 - line 36	12, 28, 29, 46, 60, 72, 73
	column 10, line 19 - column 11, line 23 claims 1, 4, 8, 11; figures 3, 7	
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 13, 30 November 1998 (1998-11-30) & JP 10 208386 A (SONY CORP), 7 August 1998 (1998-08-07) abstract	12, 26-29, 36-39, 72
X	US 5 646 993 A (AIZAWA TAKAYUKI) 8 July 1997 (1997-07-08)	20, 23, 34, 35, 71
A	column 1, line 56 - column 2, line 41 column 3, line 16 - column 4, line 49 column 5, line 30 - line 55 column 5, line 56 - column 6, line 25	8-10
A, P	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) & JP 2000 113586 A (VICTOR CO OF JAPAN LTD), 21 April 2000 (2000-04-21)  abstract	8, 12, 14, 17, 20, 23, 32-35, 38, 39, 70-72
	--- -/--	

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No

PCT/JP 00/02750

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 10, 31 October 1997 (1997-10-31) & JP 09 171619 A (SONY CORP), 30 June 1997 (1997-06-30)	70,71
A	abstract	14-20, 23,34,35
A	US 5 513 169 A (FITE BARRY A ET AL) 30 April 1996 (1996-04-30)  column 13, line 26 -column 14, line 17	12, 14-18, 20,23, 70,72

## INTERNATIONAL SEARCH REPORT

international application No.  
PCT/JP 00/02750

### Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-7 13 31 40-45

Optical disk, recording and reproducing apparatus and method having a data recording, reproducing area and a disk identification area.

2. Claims: 8-12 14-30 32-39 46-73

Optical disk, recording and reproducing apparatus and method with data recording and reproducing area having encrypted content data and providing a descramble key for the encrypted content.



# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/JP 00/02750

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9858368 A	23-12-1998	AU 8146198 A BR 9810439 A CN 1260900 T EP 0990231 A	04-01-1999 19-09-2000 19-07-2000 05-04-2000
GB 2332977 A	07-07-1999	JP 11213532 A	06-08-1999
US 5596639 A	21-01-1997	EP 0807346 A JP 2994042 B JP 10503309 T WO 9624209 A EP 0711479 A WO 9503655 A US 5563947 A	19-11-1997 27-12-1999 24-03-1998 08-08-1996 15-05-1996 02-02-1995 08-10-1996
EP 0442566 A	21-08-1991	NL 9000327 A DE 69115304 D DE 69115304 T HK 109496 A JP 4214208 A KR 221461 B US 5072435 A	02-09-1991 25-01-1996 11-07-1996 05-07-1996 05-08-1992 01-10-1999 10-12-1991
US 5752009 A	12-05-1998	EP 0634741 A JP 2891877 B JP 7078187 A KR 186891 B	18-01-1995 17-05-1999 20-03-1995 15-04-1999
WO 0021087 A	13-04-2000	AU 6004299 A JP 2000196585 A	26-04-2000 14-07-2000
EP 0984346 A	08-03-2000	JP 2000076141 A	14-03-2000
US 5745568 A	28-04-1998	NONE	
EP 0802527 A	22-10-1997	US 6081785 A CN 1166223 A CN 1173942 A DE 69610859 D DE 69610860 D DE 69610861 D EP 1005033 A EP 1005034 A EP 1005023 A EP 1005024 A EP 1005025 A EP 1005026 A EP 1005027 A EP 1024478 A EP 1005028 A EP 1003162 A EP 1005035 A EP 1006516 A EP 1006517 A EP 1028422 A EP 1028423 A EP 1030297 A EP 1031974 A	27-06-2000 26-11-1997 18-02-1998 07-12-2000 07-12-2000 07-12-2000 31-05-2000 31-05-2000 31-05-2000 31-05-2000 31-05-2000 31-05-2000 31-05-2000 02-08-2000 31-05-2000 24-05-2000 31-05-2000 07-06-2000 07-06-2000 16-08-2000 16-08-2000 23-08-2000 30-08-2000

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No

PCT/JP 00/02750

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0802527 A		EP 0741382 A	06-11-1996
		EP 0807929 A	19-11-1997
		WO 9616401 A	30-05-1996
		WO 9714146 A	17-04-1997
		WO 9714144 A	17-04-1997
		JP 3042780 B	22-05-2000
		JP 2000076705 A	14-03-2000
		JP 3089599 B	18-09-2000
		JP 2000222782 A	11-08-2000
		JP 2000076791 A	14-03-2000
		JP 2000076662 A	14-03-2000
		JP 3089600 B	18-09-2000
		JP 2000222783 A	11-08-2000
		JP 3089601 B	18-09-2000
		JP 2000222739 A	11-08-2000
		JP 3097914 B	10-10-2000
		JP 2000222729 A	11-08-2000
		JP 3042781 B	22-05-2000
		JP 2000076659 A	14-03-2000
		JP 2000228016 A	15-08-2000
		JP 2000228062 A	15-08-2000
		JP 3097916 B	10-10-2000
		JP 3097917 B	10-10-2000
		JP 2000222743 A	11-08-2000
		US 6128388 A	03-10-2000
		US 6122373 A	19-09-2000
		US 6125181 A	26-09-2000
EP 0954173 A	03-11-1999	JP 2995034 B	27-12-1999
		JP 11313282 A	09-11-1999
JP 10208386 A	07-08-1998	NONE	
US 5646993 A	08-07-1997	JP 7226024 A	22-08-1995
JP 2000113586 A	21-04-2000	CN 1248768 A	29-03-2000
		EP 0989553 A	29-03-2000
JP 09171619 6 A		NONE	
US 5513169 A	30-04-1996	US 5400319 A	21-03-1995
		US 5930215 A	27-07-1999
		US 5541904 A	30-07-1996
		US 5805549 A	08-09-1998